CATALOGUE

TOOLS

scheppach

Germany



TABLE OF CONTENTS

WOODWORKING MACHINES

4 – 7 Plunge saws
8 – 9 Cross-cut mitre saw
10 – 19 Sliding cross-cut mitre saws
20 – 27 Tool stands
28 – 31 Folding workbenches
32 – 33 Drywall assembly aid panel lifter
34 – 45 Circular table saws
46 – 49 Scroll saws
50 – 57 Band saws
58 – 59 Table router
60 – 67 Planers / Thicknessers
68 – 69 Paint remover
70 – 75 Extraction systems
76 – 77 Air filter
78 – 83 Wood lathes

GRINDING EQUIPMENT

84 – 95 Wet grinding systems
96 – 113 Bench grinder
114 – 115 Combination grinding machine
116 – 121 Belt and disc sander
122 – 125 Oscillating spindle grinding machines
126 – 129 Universal sanding and grinding tools
130 – 131 Drill bit sharpener
132 – 137 Wall and ceiling sander
138 – 139 Wall chaser

FIREWOOD EQUIPMENT

140 – 147 Log splitter
148 – 157 Metre log splitter
158 – 159 Kindling splitter
160 – 165 Rocking log saws

METAL TECHNOLOGY

168 – 179 Bench drills
180 – 181 Metal cutting chop saw
182 – 183 Cut-off saw
184 – 185 Metal band saw

HOISTING TECHNOLOGY

186 – 189 Chain hoists
190 – 193 Cable hoist

CONSTRUCTION MACHINERY

194 – 195 Universal saw
196 – 199 Tile cutter
200 – 205 Stone and tile cutters
206 – 207 Stone cutter
208 – 217 Hammer drills
218 – 227 Demolition hammers
228 – 237 Concrete mixers
238 – 239 Compulsory mixer
240 – 255 Plate compactors
256 – 257 Tamper
258 – 259 Earth auger
260 – 265 Dumpers
266 – 269 Mini excavators
270 – 271 Skid steer loader
272 – 279 Paint and mortar stirrers
280 – 283 Paint spray systems
284 – 295 Generators
296 – 297 Building dryers

COMPRESSED AIR SYSTEMS

298 – 301 Portable compressors
302 – 331 Compressors
332 – 333 Compressed air universal tool

WORKSHOP

334 – 335 Pallet truck
336 – 349 Tool kits
350 – 357 Workshop trolley
358 – 359 Modular workshop system

CLEANING SYSTEMS


360 – 361 Manual sweeper
362 – 377 High-pressure cleaners
378 – 391 Wet/dry vacuum cleaners
392 – 393 Ash vacuum cleaner

Interactive table of contents

TABLE OF CONTENTS





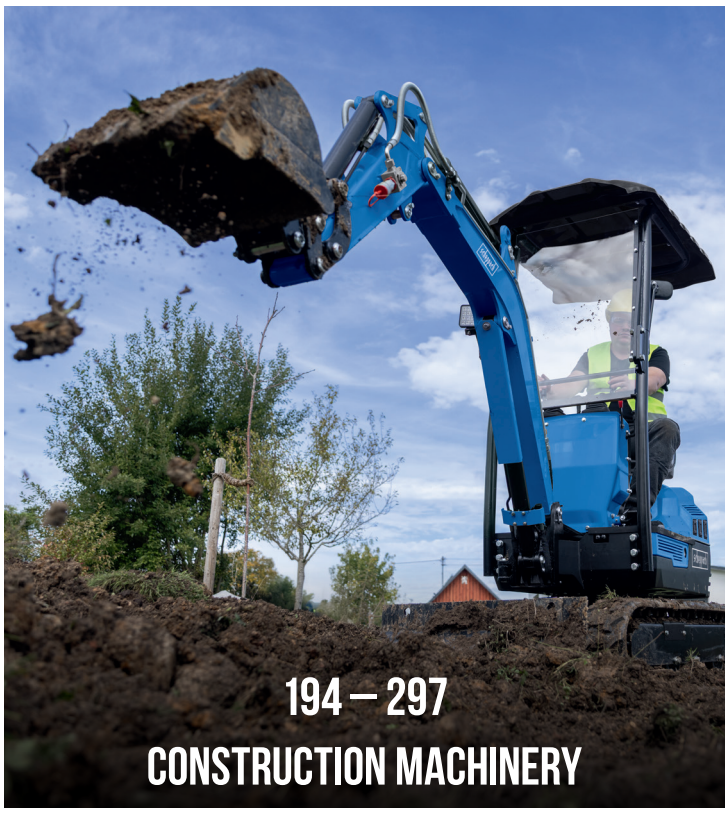










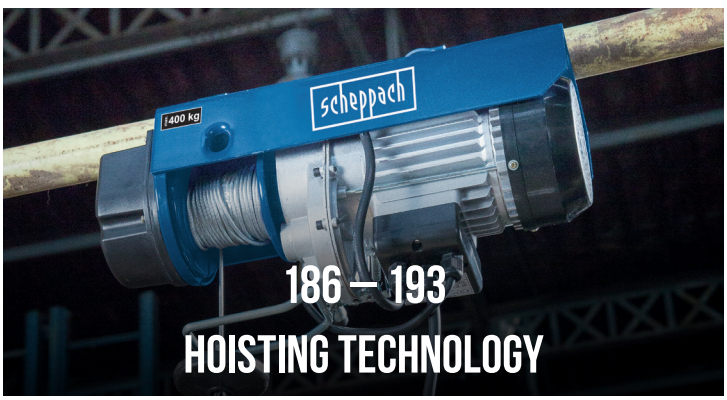



160 MM PROFESSIONAL PLUNGE SAW-SET


PL55

360°

3in1

- Plunge saw
- Hand-held circular saw
- Panel saw

Click here for optional accessories

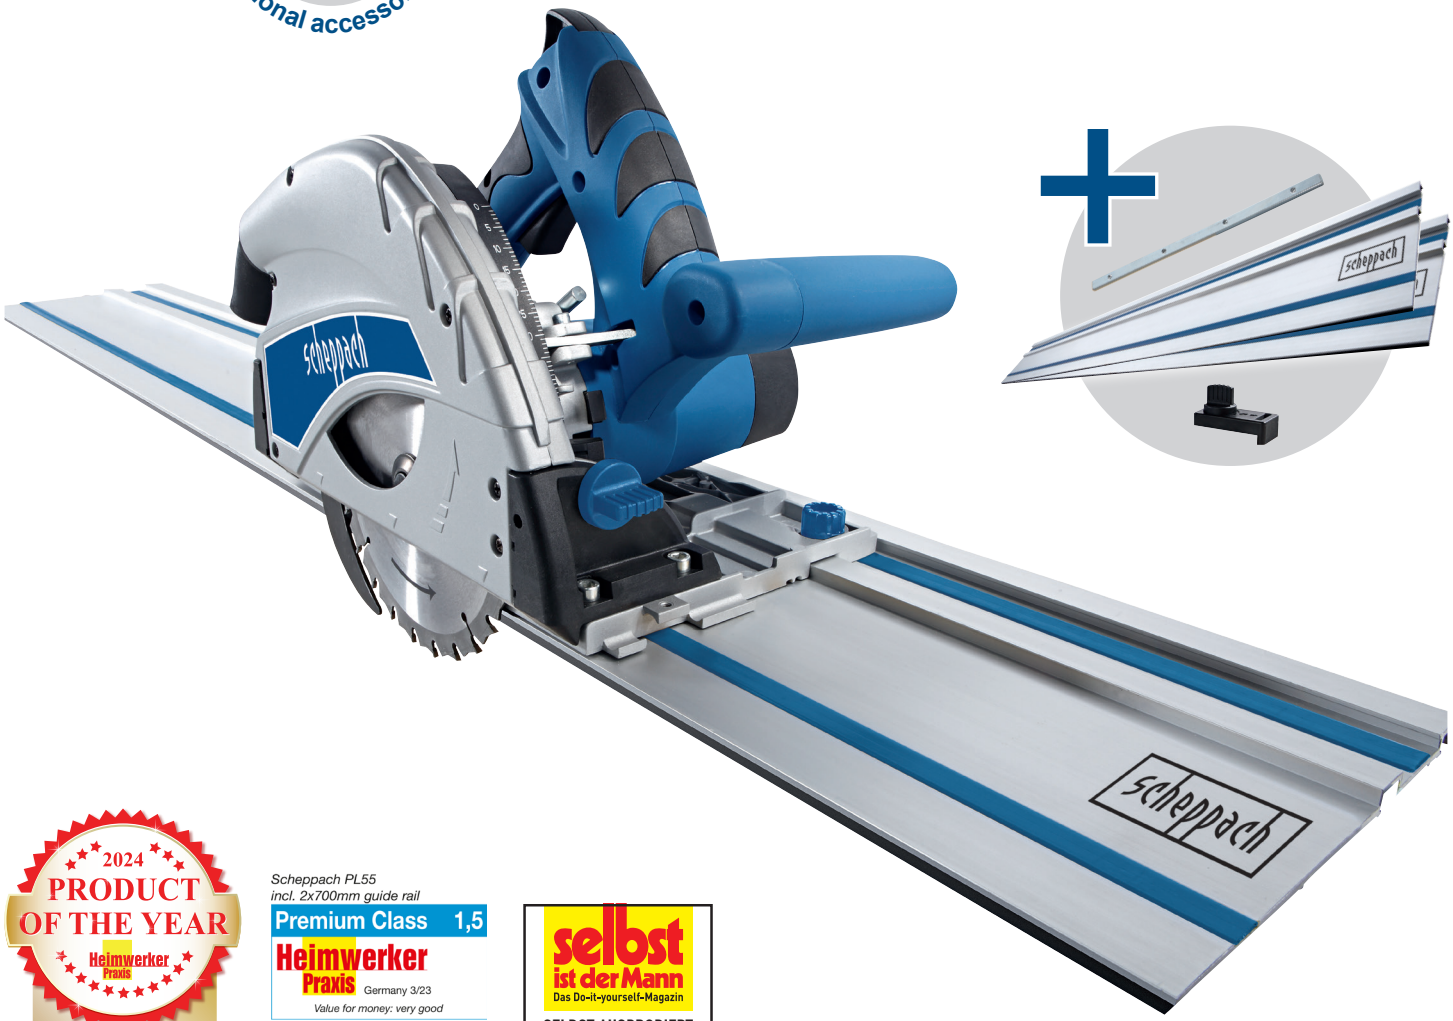

2024 PRODUCT OF THE YEAR
Heimwerker Praxis
Power tools
Scheppach plunge saw PL55 incl. 2 x 700 mm guide rail

Scheppach PL55
incl. 2x700mm guide rail
Premium Class 1,5
Heimwerker Praxis Germany 3/23
Value for money: very good

Best Buy (Set)
Heimwerker Praxis Germany 3/23

selbst ist der Mann
Das Do-it-yourself-Magazin
SELBST AUSPROBIERT
FAZIT: TTTTT
Bewertet mit „GUT"
Ausgabe 8/2012
www.selbst.de

PRODUCT DATA

Dimensions L x W x H	340 x 260 x 235 mm
Mains voltage:	230 – 240 V~
Power:	1200 W
Saw blade specifications:	160 x 20 x 2.4 mm
Saw blade speed:	5500 rpm
Max. cutting depth 90°:	55 mm
Max. cutting depth 45°:	41 mm
Tilt angle:	0 – 45° (stepless)
Recess joint:	16 mm

LOGISTICAL DATA

Weight net / gross	7.4 / 8.2 kg
Packaging dimensions	710 x 260 x 270 mm
Item number	5901802915
EAN	4046664025665
20 containers	900 pcs.
40 containers	1880 pcs.
40 HQ containers	2100 pcs.

55 mm



41 mm



160 x 20 x 2.4 mm



5500 rpm



Compact



Lightweight




APPLICATION EXAMPLES




Timber boards



Planks

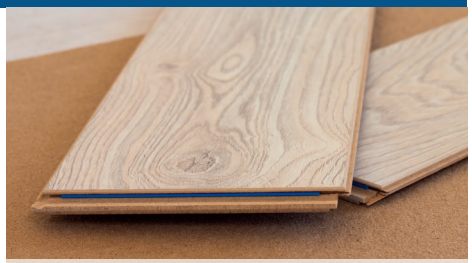

Laminate / panels

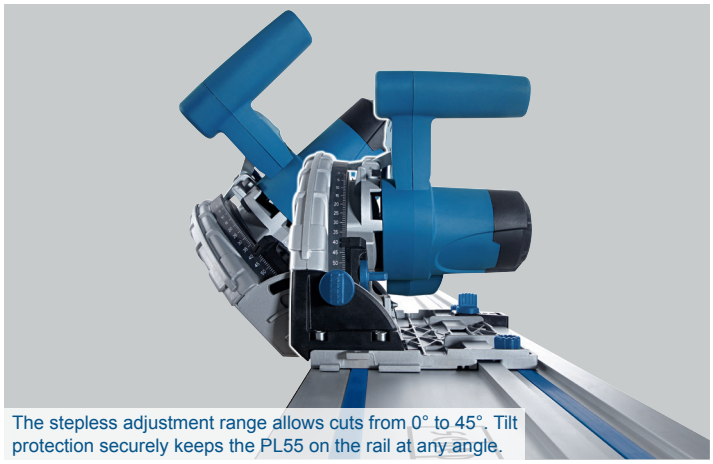

The stepless adjustment range allows cuts from 0° to 45°. Tilt protection securely keeps the PL55 on the rail at any angle.



The cutting depth of 55 mm covers a wide range of uses.



This plunge saw is ideal for cut-outs in kitchen work tops and allows precise work without splintering.



Even solid planks can be effortlessly trimmed with the PL55.



Shadow gaps up to 16 mm are also possible with quickly and safely using the PL55, even in veneered wood, thanks to the splinter guard.



The advantage compared with conventional hand-held circular saws is the immersion function. This makes it easy to meet special requirements plunging the saw blade into the material can be implemented without problems.

04/2026 Technical modifications and errors reserved.

INCLUDING

- **2 x 700 mm guide rail**
- **Rail connector**
- **Anti-tip device**

scheppach Germany

210 MM PROFESSIONAL PLUNGE SAW-SET

PL75

Click here for optional accessories

3in1

- Plunge saw
- Hand-held circular saw
- Panel saw



selbst ist der Mann
Das Do-it-yourself-Magazin
SELBST AUSPROBIERT
FAZIT: TTTTT
Bewertet mit „GUT“
Ausgabe 11/2015
www.selbst.de

Best Of 2024
Heimwerker Praxis 1/24
Scheppach plunge saw PL75
Category: power tools

Scheppach Plunge saw PL75
Premium Class 1,5
Heimwerker Praxis Germany 3/23
Value for money: very good

PRODUCT DATA

Dimensions L x W x H	420 x 300 x 235 mm
Mains voltage:	230 – 240 V~
Power:	1600 W
Saw blade specifications:	210 x 30 x 2.4 mm
Saw blade speed:	4500 rpm
Max. cutting depth 90°:	75 mm
Max. cutting depth 45°:	55 mm
Tilt angle:	0 – 45° (stepless)
Recess joint:	16 mm

LOGISTICAL DATA

Weight net / gross	6.9 / 7.6 kg
Packaging dimensions	430 x 240 x 315 mm
Item number	5901804901-901
EAN	4046664042396
20 containers	670 pcs.
40 containers	1350 pcs.
40 HQ containers	1540 pcs.

75 mm | 55 mm | 210 x 30 x 2.4 mm | 4500 rpm | Compact | Lightweight

APPLICATION EXAMPLES




Timber boards



Planks



Laminate / panels

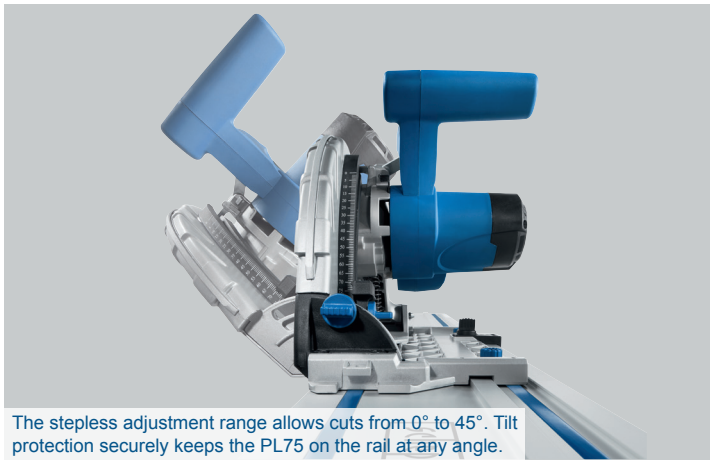

The stepless adjustment range allows cuts from 0° to 45°. Tilt protection securely keeps the PL75 on the rail at any angle.



The integrated splinter guard ensures edges without breakout.



With its cutting depth of 75 mm, the PL75 ensures the same precise result as many circular table saws.



This plunge saw is ideal for cut-outs in kitchen work tops and allows precise work without splintering.



Shadow gaps up to 16 mm are also possible with quickly and safely using the PL75, even in veneered wood, thanks to the splinter guard.



The advantage compared with conventional hand-held circular saws is the immersion function. This makes it easy to meet special requirements plunging the saw blade into the material can be implemented without problems.

04/2026 Technical modifications and errors reserved.

INCLUDING

- **1400 mm guide rail**
- **Rail connector**
- **Anti-tip device**

scheppach Germany

210 MM CROSS-CUT MITRE SAW

HM210L



Click here for optional accessories

PRODUCT DATA

Dimensions:	405 x 435 x 300 mm
Mains voltage:	220 – 240 V~ / 50 Hz
Power:	1500 W
Saw blade specifications:	210 x 30 x 2.6 mm / 24 teeth
Saw blade speed:	4900 rpm
Max. cutting width/height 90° / 90°	120 x 60 mm
Max. cutting width/height 90° / 45°	120 x 35 mm
Max. cutting width/height 45° / 90°	80 x 60 mm
Max. cutting width/height 45° / 45°	80 x 35 mm
Special cutting height:	No
Tilt angle:	1 x 45°
Mitre angle:	+45° to - 45°
Grid position on the turntable at:	0°, 15°, 22.5°, 30°, 31.5°, 45°
Cutting line display:	Laser

LOGISTICAL DATA

Weight net / gross	6.5 / 7.8 kg
Packaging dimensions	490 x 330 x 340 mm
Item number	5901226901
EAN	4046664231134
20 containers	497 pcs.
40 containers	1036 pcs.
40 HQ containers	1184 pcs.

1500 W

60 mm

120 mm

210 x 30 x 2,6 mm
24 teeth

Laser

UNIVERSAL APPLICATION



Skirting boards



Laminate / panels




Wooden beams



Wooden boards



Angle cuts

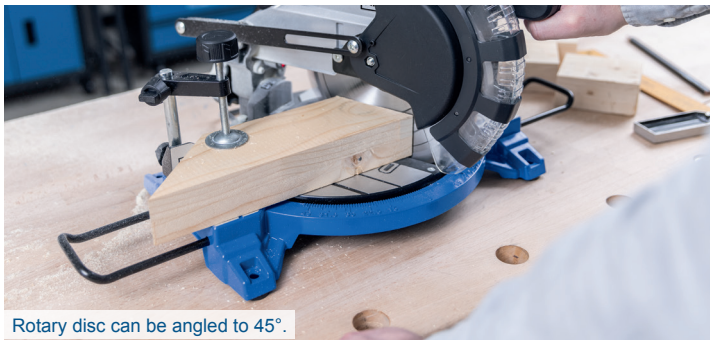

Rotary disc can be angled to 45°.



Saw head can be angled to the left up to 45°.



Work piece clamp secures timber during the sawing process.



Workpiece supports on both sides for machining long workpieces.



Enclosed saw blade guard for maximum work safety.

04/2026 Technical modifications and errors reserved.

scheppach Germany

210 MM SLIDING CROSS-CUT MITRE SAW

HM216

NEW
Shadow cut line



Click here for optional accessories

PRODUCT DATA

Dimensions:	735 x 705 x 500 mm
Mains voltage:	230 V~ / 50 Hz
Power:	2000 W
Saw blade specifications:	210 mm / 24 and 48 Teeth
Saw blade speed:	4800 rpm
Max. cutting width/height 90° / 90°	340 x 65 mm
Max. cutting width/height 90° / 45°	240 x 65 mm
Max. cutting width/height 45° / 90°	340 x 38 mm
Max. cutting width/height 45° / 45°	240 x 38 mm
Special cutting height:	No
Tilt angle:	1 x 45° left
Mitre angle:	+45° to - 45°
Grid position on the turntable at:	5°, 10°, 15°, 22,5°, 31,6°, 40°, 45°
Cutting line display:	Shadow Cut Line

LOGISTICAL DATA

Weight net / gross	10.76 / 12.96 kg
Packaging dimensions	740 x 460 x 365 mm
Item number	5901234901
EAN	4046664288909
20 containers	228 pcs.
40 containers	480 pcs.
40 HQ containers	560 pcs.

2000 W



65 mm



340 mm



210 mm
24 Teeth / 48 Teeth



Shadow Cut Line



UNIVERSAL APPLICATION



Skirting boards



Laminate / panels



Wooden beams



Wooden boards




Angle cuts



The work piece clamp ensures maximum safety during sawing.



Easy angle adjustment using the specified lock-in positions on the rotary disc.

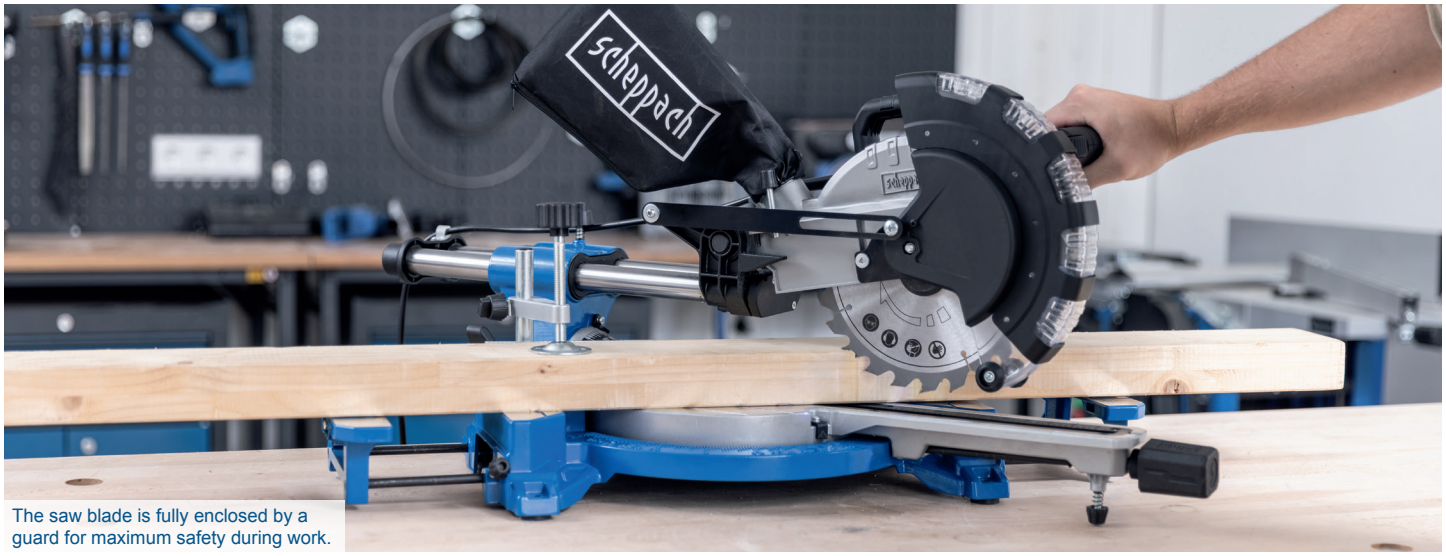

The saw blade is fully enclosed by a guard for maximum safety during work.

04/2026 Technical modifications and errors reserved.

INCLUDING

- Saw blade with 24 Teeth
- Saw blade with 48 Teeth

scheppach Germany


255 MM SLIDING CROSS-CUT MITRE SAW

HM254

NEW
Shadow cut line



Click here for optional accessories

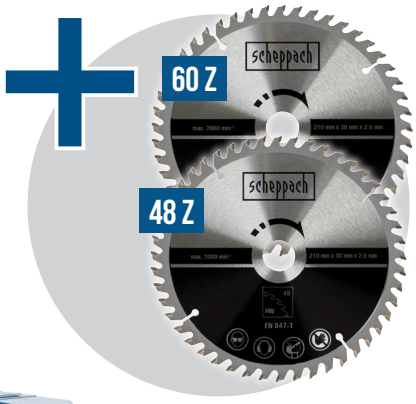

PRODUCT DATA

Dimensions:	750 x 520 x 560 mm
Mains voltage:	220 – 240 V~ / 50 Hz
Power:	2400 W
Saw blade specifications:	255 x 30 x 2.8 mm, 48 / 60 teeth
Saw blade speed:	7000 rpm
Max. cutting width/height 90° / 90°	340 x 90 mm
Max. cutting width/height 90° / 45°	240 x 90 mm
Max. cutting width/height 45° / 90°	340 x 45 mm
Max. cutting width/height 45° / 45°	240 x 45 mm
Tilt angle:	0 – +45°
Mitre angle:	+45° to - 45°
Grid position on the turntable at:	5°, 10°, 15°, 22,5°, 31,6°, 40° and 45°
Soft start	Yes
Cutting line display:	Shadow cut light

LOGISTICAL DATA

Weight net / gross	12.8 / 16.3 kg
Packaging dimensions	815 x 480 x 420 mm
Item number	5901233901
EAN	4046664288893
20 containers	165 pcs.
40 containers	330 pcs.
40 HQ containers	408 pcs.

2400 W



90 mm



340 mm



255 x 30 x 2.8 mm
48 / 60 teeth



Shadow cut light



UNIVERSAL APPLICATION



Skirting boards



Laminate / panels



Wooden beams



Wooden boards



Angle cuts




Large cutting width up to 340 mm and 90 mm cutting height at 90°.




Precise cutting line thanks to LED shadow cut line system for the saw blade.



Mitre angle adjustable to the left and right in the range from 45° to -45°.

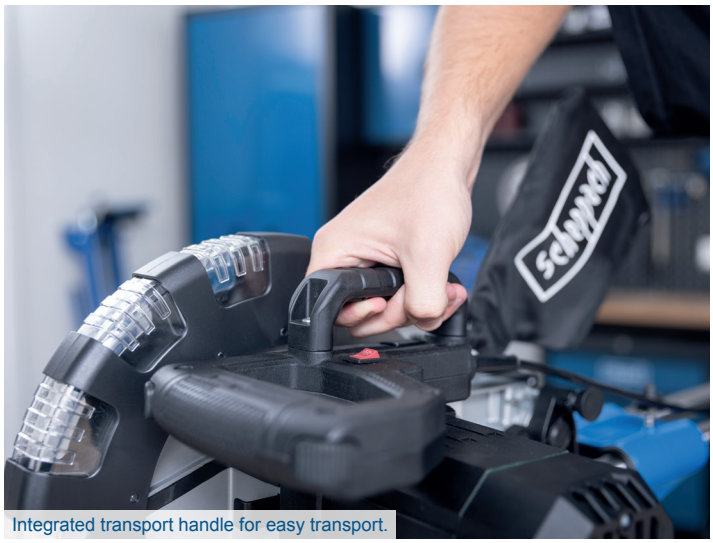

Integrated transport handle for easy transport.

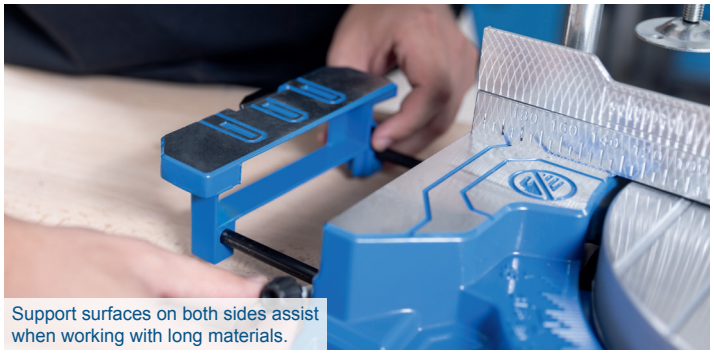

Support surfaces on both sides assist when working with long materials.

04/2026 Technical modifications and errors reserved.

INCLUDING

- Saw blade with 48 teeth
- Saw blade with 60 teeth

scheppach Germany


305 MM SLIDING CROSS-CUT MITRE SAW

HM 140L

selbst ist der Mann
Das Do-it-yourself-Magazin
PRAXISTEST
– Kategorie: Profiklasse –
GUT (2,4)
3 Produkte mit gut
Ausgabe 01/2022
3 Produkte im Test
www.selbst.de



Click here for optional accessories

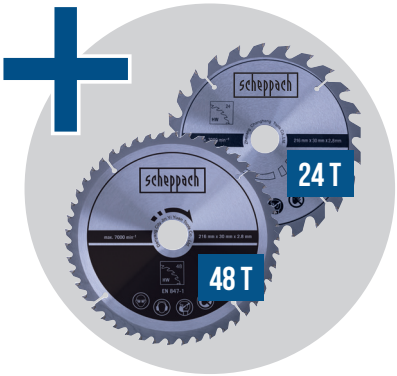


PRODUCT DATA

Dimensions:	865 x 535 x 520 mm
Mains voltage:	220 – 240 V~ / 50 Hz
Power:	2000 W
Saw blade specifications:	305 x 30 mm / 24 and 48 teeth
Saw blade speed:	3800 rpm
Max. cutting width/height 90° / 90°	330 x 105 mm
Max. cutting width/height 90° / 45°	330 x 35 mm (r.) 330 x 60 mm (l.)
Max. cutting width/height 45° / 90°	330 x 60 mm
Max. cutting width/height 45° / 45°	230 x 35 mm (r.) 230 x 60 mm (l.)
Special cutting height:	No
Tilt angle:	2 x 45°
Mitre angle:	+45° to - 45°
Grid position on the turntable at:	45 – 31.6 – 22.5 – 0 – 22.5 – 31.6 – 45°
Cutting line display:	Laser

LOGISTICAL DATA

Weight net / gross	20.5 / 25.3 kg
Packaging dimensions	875 x 540 x 520 mm
Item number	5901218901
EAN	4046664072843
20 containers	104 pcs.
40 containers	236 pcs.
40 HQ containers	284 pcs.

2000 W



105 mm



330 mm



305 x 30 mm
24 teeth / 48 teeth



Laser



UNIVERSAL APPLICATION



Skirting boards



Laminate / panels



Wooden beams



Wooden boards



Angle cuts



Mitre angles can be set left and right via freely selectable angles and locking points from -45° to +45°.



Adjustable mitre angle ideal for particularly precise angle cuts.



The saw head can be tilted up to 45° on both sides.



Exceptional cutting height of 105 mm.

04/2026 Technical modifications and errors reserved.

INCLUDING

- Saw blade with 24 teeth
- Saw blade with 48 teeth

scheppach Germany

255 MM SLIDING CROSS-CUT MITRE SAW WITH PULLOUT FUNCTION

HM255SL

Click here for optional accessories



PRODUCT DATA

Dimensions L x W x H	480 x 735 x 600 mm
Saw blade Ø	255 x 30 x 2.8 mm / 24 T
motor speed	5000 rpm
Tilt angle	1 x 45° to the right
Mitre angle	+47° to - 47°
Cutting width/height: 90° / 90°	305 x 90 mm
Cutting width / height: 90° / 45°	305 x 40 mm
Cutting width / height: 45° / 90°	215 x 90 mm
Cutting width / height: 45° / 45°	215 x 40 mm
Grid position on the turntable at	45-31.6-22.5-0-22.5-31.6-45°
Engine	220 – 240 V~ , 50 / 60 Hz
Engine output	2000 W

LOGISTICAL DATA

Weight net / gross	16 / 19.5 kg
Packaging dimensions	660 x 470 x 430 mm
Item number	5901235901
EAN	4046664300564
20 containers	205 pcs.
40 containers	435 pcs.
40 HQ containers	516 pcs.

2000 W



90 mm



305 mm



255 x 30 x 2.8 mm
24 teeth



Laser



UNIVERSAL APPLICATION



Skirting boards



Laminate / panels




Wooden beams




Wooden boards



Angle cuts

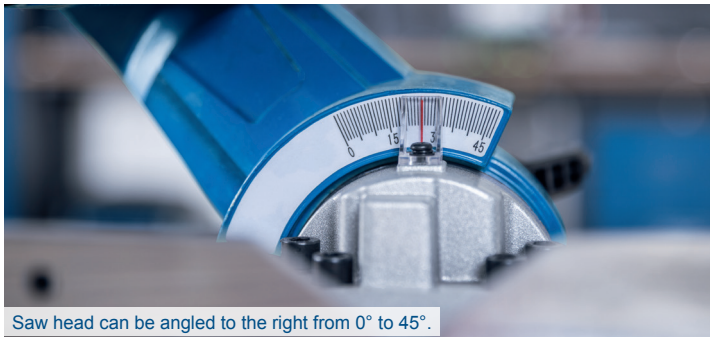

Saw head can be angled to the right from 0° to 45°.

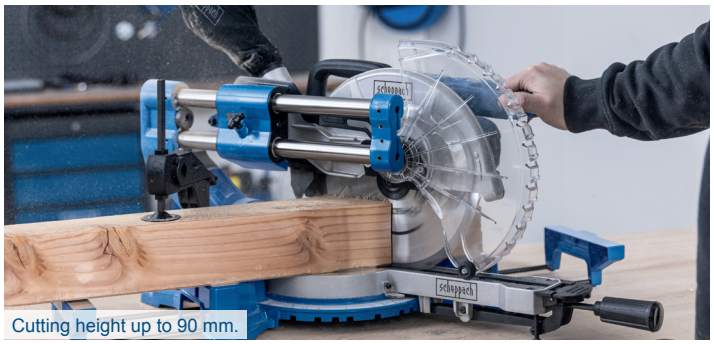


Cutting height up to 90 mm.



Work piece supports on both sides allow processing of long work pieces.



Rotary disc can be angled to the right and left up to 47°.

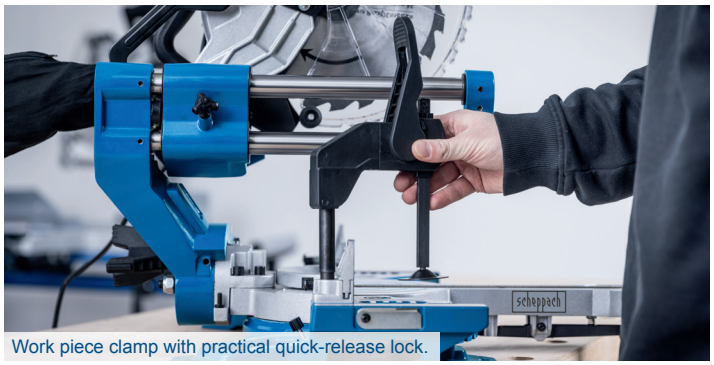


Work piece clamp with practical quick-release lock.

04/2026 Technical modifications and errors reserved.

scheppach Germany

305 MM SLIDING CROSS-CUT MITRE SAW WITH PULLOUT FUNCTION

HM305SL

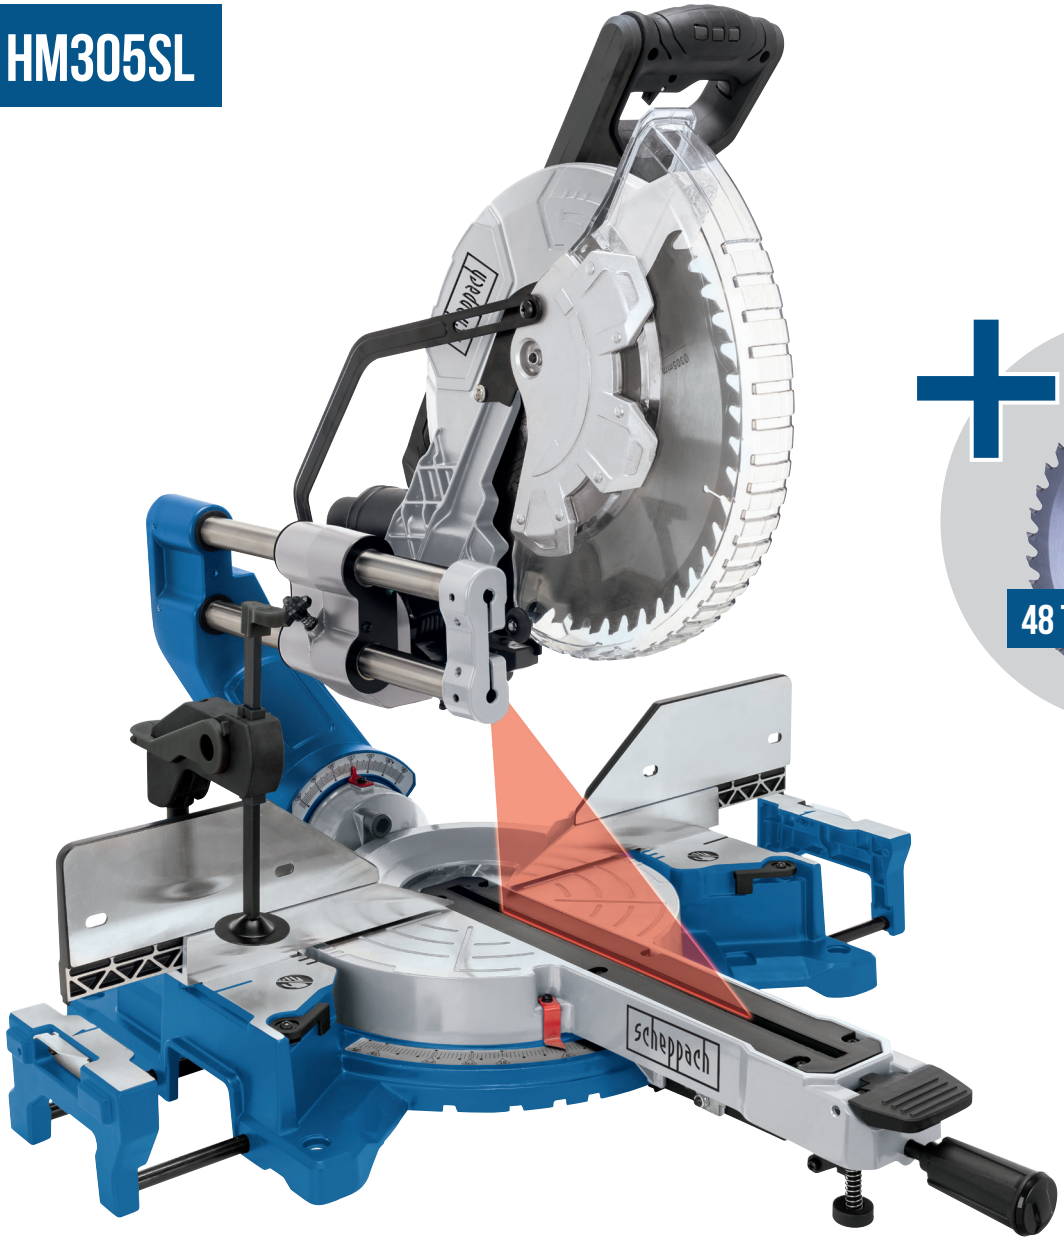



Click here for optional accessories

PRODUCT DATA

Dimensions:	588 x 842 x 746 mm
Mains voltage:	220 – 240 V~ / 50 Hz
Power:	2000 W
Saw blade specifications:	305 x 30 mm, 48 teeth
Saw blade speed:	5000 rpm
Max. cutting width/height 90° / 90°	340 x 105 mm
Max. cutting width/height 90° / 45°	340 x 35 mm (r.) 340 x 60 mm (l.)
Max. cutting width/height 45° / 90°	240 x 105 mm
Max. cutting width/height 45° / 45°	240 x 60 mm (r.) 240 x 60 mm (l.)
Special cutting height	20 mm / 180 mm
Tilt angle:	0 – +48°
Mitre angle:	+45° to - 45°
Grid position on the turntable at:	45-31.6-22.5-0-22.5-31.6-45°
Soft start	Yes
Cutting line display:	Laser

LOGISTICAL DATA

Weight net / gross	20.9 / 24.6 kg
Packaging dimensions	750 x 585 x 390 mm
Item number	5901223901
EAN	4046664161035
20 containers	162 pcs.
40 containers	320 pcs.
40 HQ containers	360 pcs.

2000 W

105 mm

340 mm

305 x 30 mm
48 teeth

Laser

UNIVERSAL APPLICATION



Skirting boards



Laminate / panels



Wooden beams




Wooden boards




Angle cuts



Sliding pullout function with parallel guides requires no space behind the unit.

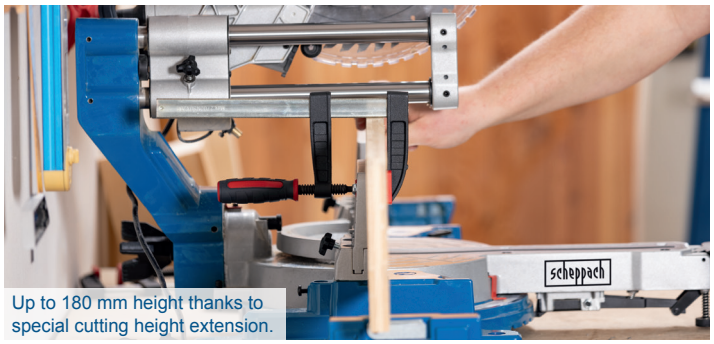

Up to 180 mm height thanks to special cutting height extension.

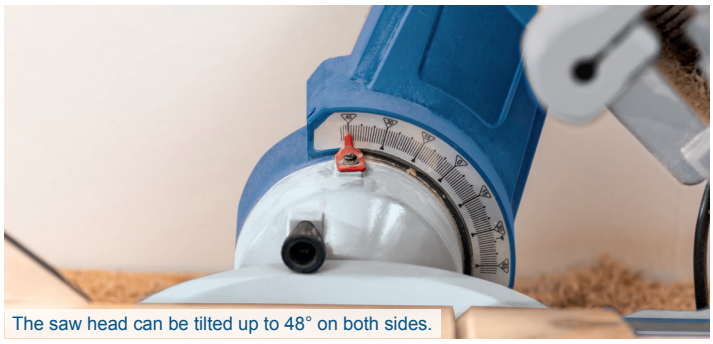


The saw head can be tilted up to 48° on both sides.



The swivelling work table can be adjusted from -50° to +50°.



Work piece clamp with quick-release lock.

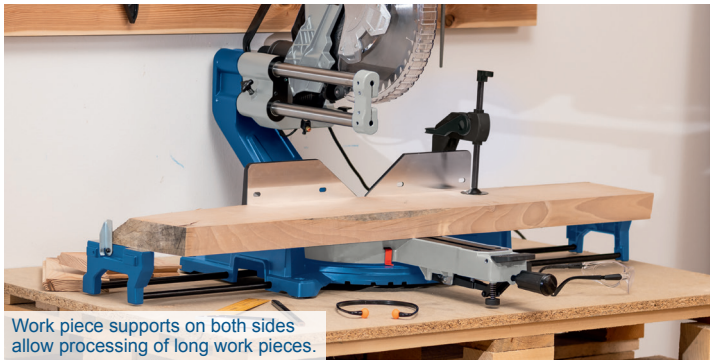

Work piece supports on both sides allow processing of long work pieces.

04/2026 Technical modifications and errors reserved.

scheppach Germany

UNIVERSAL BASE FRAME

UMF1550




PRODUCT DATA

Dimensions L x W x H	935 – 1985 x 640 x 825 – 935 mm
Payload	150 kg
Working height	780 mm
Pull-out supports	935 - 1985 mm
Support height adjustment	825 - 935 mm
Foldable	Yes


LOGISTICAL DATA

Weight net / gross	9.8 / 10.8 kg
Packaging dimensions	910 x 250 x 150 mm
Item number	5907107900
EAN	4046664040521
20 containers	880 pcs.
40 containers	1810 pcs.
40 HQ containers	2070 pcs.


Load capacity max. 150 kg



Supports height-adjustable 110 mm



Can be extended up to max. 935 – 1985 mm




Working height 780 mm





Stable and universally adjustable machine mounting for almost all makes.

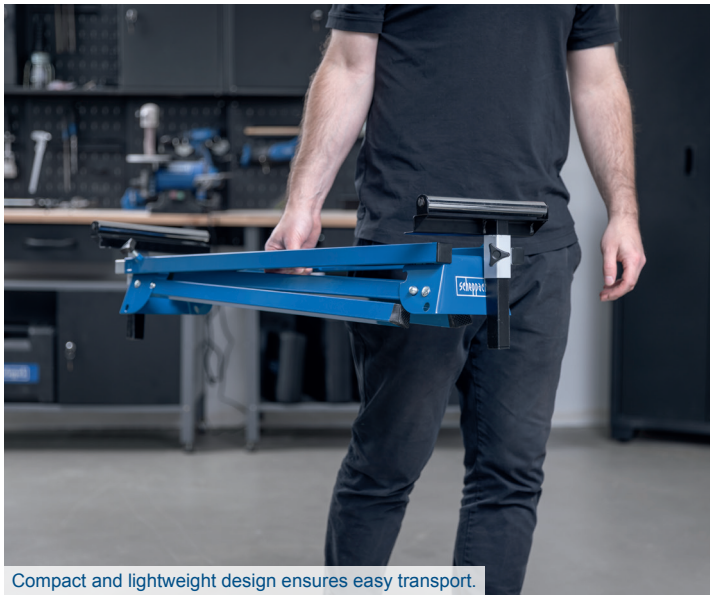

Compact and lightweight design ensures easy transport.



Extendable side extensions for sawing long workpieces.



Adjustable workpiece stop adjustable by 110 mm.



Collapsible aluminium construction ideal for mobile use.



Device mounting easy to secure for safe and ergonomic operation

04/2026 Technical modifications and errors reserved.

scheppach Germany

UNIVERSAL BASE FRAME

UMF 1600




PRODUCT DATA

Dimensions L x W x H	1000 – 1650 x 580 x 810 – 910 mm
Payload	200 kg
Working height	740 mm
Pull-out supports	1000 - 1650 mm
Support height adjustment	810 - 910 mm
Foldable	Yes


LOGISTICAL DATA

Weight net / gross	12.3 / 13.2 kg
Packaging dimensions	1075 x 260 x 190 mm
Item number	5907103900
EAN	4046664031888
20 containers	540 pcs.
40 containers	1140 pcs.
40 HQ containers	1320 pcs.


Load capacity max. 200 kg



Supports height-adjustable 100 mm



Can be extended up to max. 1000 – 1650 mm



Working height 740 mm





Stable and universally adjustable machine mounting for almost all makes.



Compact and lightweight design ensures easy transport.




Extendable side extensions for sawing long workpieces.



Adjustable workpiece stop adjustable by 110 mm.



Collapsible aluminium construction ideal for mobile use.

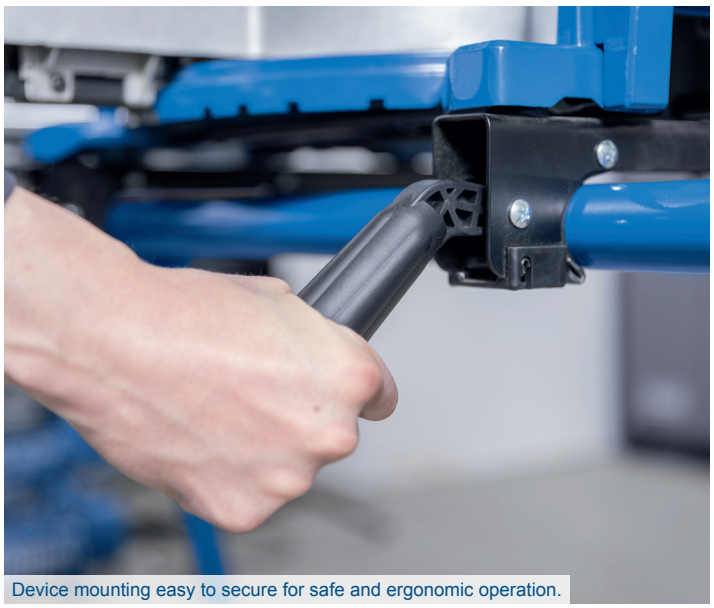

Device mounting easy to secure for safe and ergonomic operation.

04/2026 Technical modifications and errors reserved.

scheppach Germany

UNIVERSAL BASE FRAME

UMF2000




PRODUCT DATA

Dimensions L x W x H	1160 – 2000 x 632 x 900 – 1000 mm
Payload	250 kg
Working height	845 mm
Pull-out supports	1160 - 2000 mm
Support height adjustment	900 - 1000 mm
Foldable	Yes


LOGISTICAL DATA

Weight net / gross	13.5 / 15 kg
Packaging dimensions	1240 x 290 x 200 mm
Item number	5907102900
EAN	4046664031499
20 containers	480 pcs.
40 containers	970 pcs.
40 HQ containers	1120 pcs.


Load capacity max. 250 kg



Supports height-adjustable 100 mm




Can be extended up to max. 1160 – 2000 mm



Working height 845 mm



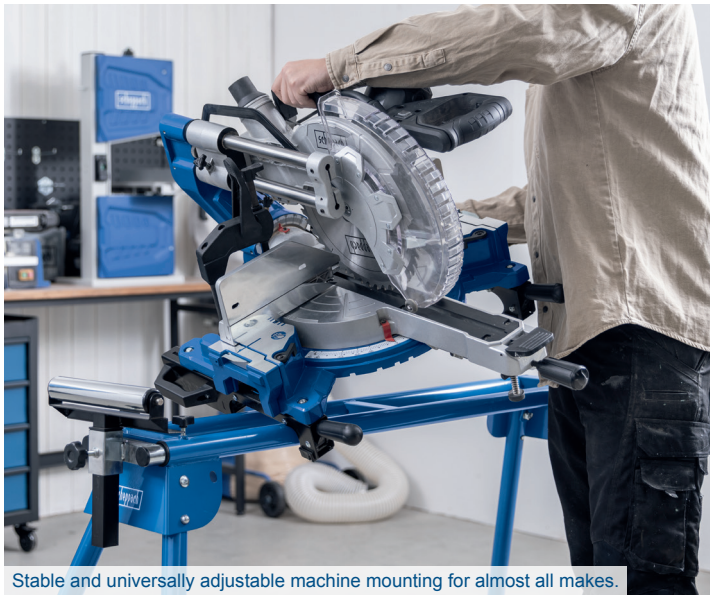

Stable and universally adjustable machine mounting for almost all makes.



Compact and lightweight design ensures easy transport.



Extendable side extensions for sawing long workpieces.



Adjustable workpiece stop adjustable by 100 mm.



Collapsible aluminium construction ideal for mobile use.



Device mounting easy to secure for safe and ergonomic operation

04/2026 Technical modifications and errors reserved.

scheppach Germany

TRESTLE

MWB600




PRODUCT DATA

Dimensions L x W x H	1088 x 465 – 632 x 618 – 820 mm
Payload	1200 kg (2 pieces)
Working height	618 – 820 mm
Foldable	Yes


LOGISTICAL DATA

Weight net / gross	18.6 / 21.5 kg (2 pieces)
Packaging dimensions	1170 x 306 x 198 mm
Item number	5907109852
EAN	4046664124191
20 containers	378 pcs.
40 containers	780 pcs.
40 HQ containers	894 pcs.

Load capacity max.
1200 kg



Working height
618 – 820 mm





APPLICATION EXAMPLES



Plasterboard


Chipboard panels


Timber panels

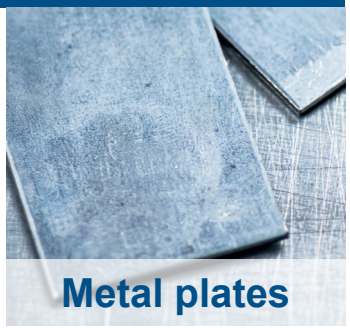
Metal plates

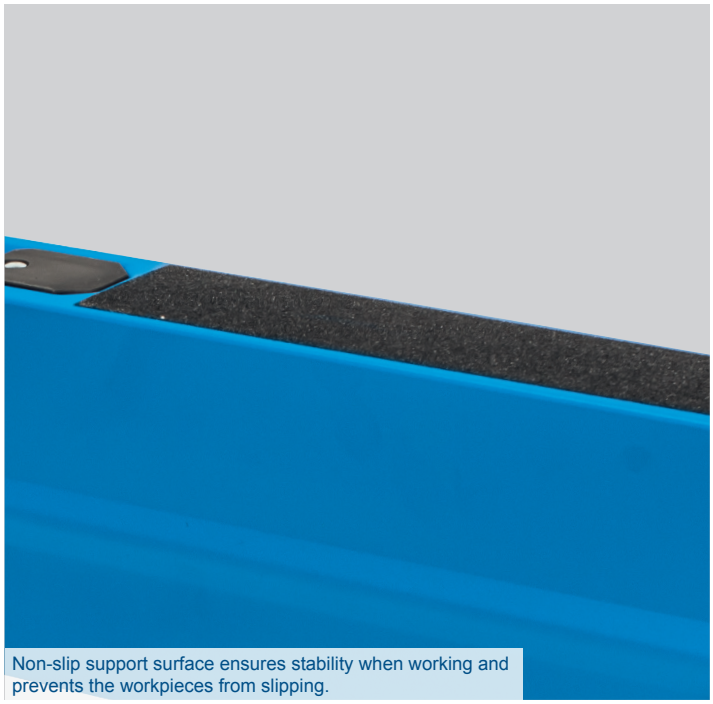
Non-slip support surface ensures stability when working and prevents the workpieces from slipping.

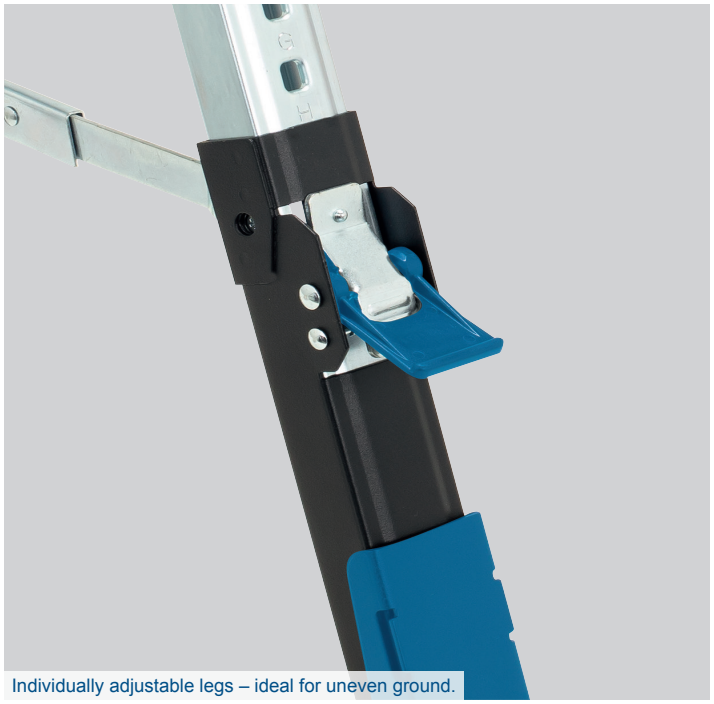
Individually adjustable legs – ideal for uneven ground.


Non-slip feet allow stable and secure positioning



04/2026 Technical modifications and errors reserved.

scheppach Germany

FOLDABLE WORKBENCH

FW800




PRODUCT DATA	
Dimensions L x W x H	2300 x 630 x 750 mm
Payload	800 kg
Working height	750 mm
Material	Aluminium / steel / plastic
Foldable	Yes

LOGISTICAL DATA	
Weight net / gross	8.6 / 10.5 kg
Packaging dimensions	930 x 390 x165mm
Item number	5907124905
EAN	4046664290544
20 containers	480 pcs.
40 containers	970 pcs.
40 HQ containers	1135 pcs.

Load capacity max. 800 kg



750 mm



Tool-free assembly



Indoor/Outdoor




APPLICATION EXAMPLES







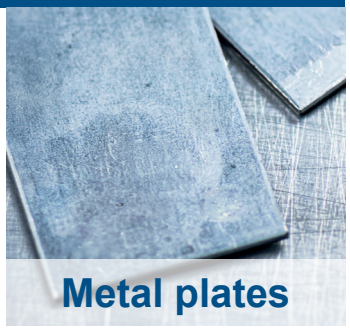



Flexible and stable aluminium construction with plastic support points.



Folds down to a space-saving size of 91 x 38 x 15 cm.



Foldable workbench for mobile use indoors and outdoors.



Maximum load capacity of 800 kg.

04/2026 Technical modifications and errors reserved.

INCLUDING

- Carrier bag

scheppach Germany

FOLDABLE WORKBENCH

FW1200




PRODUCT DATA	
Dimensions L x W x H	2300 x 630 x 750 mm
Payload	1200 kg
Working height	750 mm
Material	Aluminium / steel / plastic
Foldable	Yes

LOGISTICAL DATA	
Weight net / gross	13.1 / 17.6 kg
Packaging dimensions	930 x 390 x165mm
Item number	5907123905
EAN	4046664290537
20 containers	480 pcs.
40 containers	970 pcs.
40 HQ containers	1135 pcs.

Load capacity max. 1200 kg



750 mm



Tool-free assembly



Indoor/Outdoor




APPLICATION EXAMPLES


Plasterboard


Chipboard panels


Timber panels

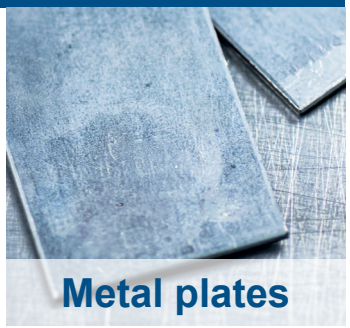
Metal plates


Flexible and stable aluminium construction with plastic support points.


Folds down to a space-saving size of 91 x 38 x 23 cm.


Foldable workbench for flexible and mobile use indoors and outdoors.


Maximum load capacity of 1200 kg.

04/2026 Technical modifications and errors reserved.

INCLUDING

- Carrier bag

scheppach Germany

DRYWALL ASSEMBLY AID PANEL LIFTER

TBL400



PRODUCT DATA

Dimensions L x W x H	123 x 123 x 123 mm
Payload	68 kg
Carrying height	3350 mm
Plate pull-out	1280 - 2950 mm
Plate swivel range	up to 60°
Stop hook	Yes

LOGISTICAL DATA

Weight net / gross	34.5 / 36 kg
Packaging dimensions	1290 x 490 x 170 mm
Item number	5902001901
EAN	4046664207405
20 containers	255 pcs.
40 containers	510 pcs.
40 HQ containers	615 pcs.

1220 - 3350 mm



Load capacity 68 kg




Plate size:
1220 x 4880 mm





APPLICATION EXAMPLES



Plasterboard



Chipboard panels


Timber panels


Metal panels


Thanks to height adjustment and adjustable 60° tilt, overhead work can be carried out effortlessly, even on sloping walls.

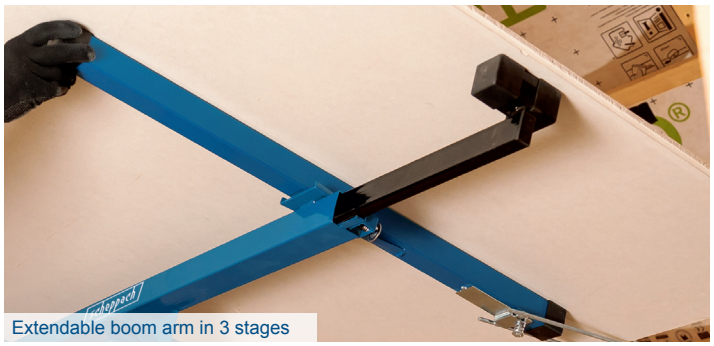
Extendable boom arm in 3 stages

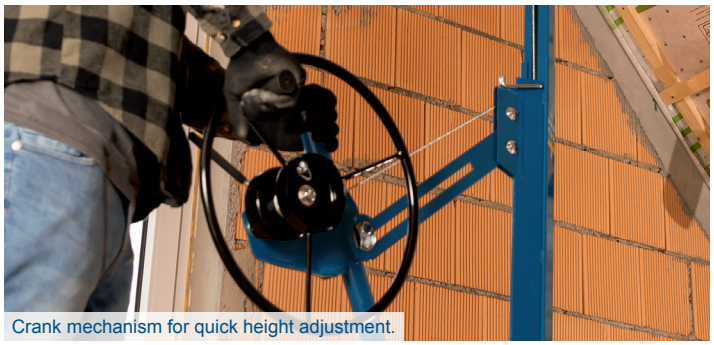
Crank mechanism for quick height adjustment.


Holding brake enables stable and secure standing.


Locking hooks secure the plate against slipping.

04/2026 Technical modifications and errors reserved.

scheppach Germany

210 MM CIRCULAR TABLE SAW

HS210

Click here for optional accessories




PRODUCT DATA

Dimensions L x W x H	545 x 460 x 380 mm
Mains voltage	220 – 240 V~ / 50 Hz
Power	1500 W
Max. cutting height 90°	70 mm
Max. cutting height 45°	54 mm
Saw blade specifications	210 x 30 x 2.6 mm / 24 T
Saw blade speed	4800 rpm
Tilt angle	0 - 45°
Table size	485 x 445 mm
Table extension	No
Table material	Sheet steel

LOGISTICAL DATA

Weight net / gross	10.5 / 12 kg
Packaging dimensions	545 x 500 x 320 mm
Item number	5901327901
EAN	4046664231035
20 containers	308 pcs.
40 containers	644 pcs.
40 HQ containers	736 pcs.

1500 W



70 mm




54 mm



210 x 30 x 2.6 mm / 24 Z






APPLICATION EXAMPLES



Bar




Profiled boards



Mitre cuts



Longitudinal cuts



Boards




Hand wheel for comfortable height adjustment.



Compact, space-saving design – ideal for mobile use.



Mitre gauge can be adjusted from -60° to +60° – ideal for mitre cuts.

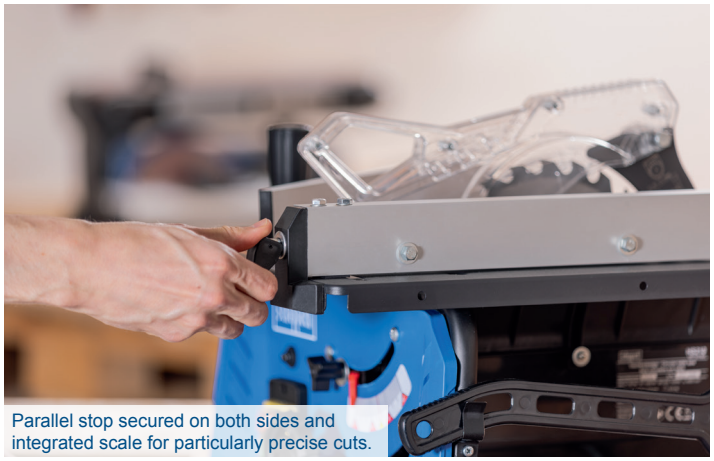

Parallel stop secured on both sides and integrated scale for particularly precise cuts.



Compact circular table saw for precise cutting of joists and profiled boards, etc.



Saw blade can be tilted continuously from 0 to 45° for precise mitre cuts.

04/2026 Technical modifications and errors reserved.

INCLUDING

- **Saw blade with 24 teeth (pre-assembled)**

scheppach Germany

250 MM CIRCULAR TABLE SAW

HS100S

360°

Click here for optional accessories




PRODUCT DATA

Dimensions L x W x H	894 x 630 x 1030 mm
Mains voltage	220 - 240 V~ / 50 Hz
Power	2000 W
Max. cutting height 90°	85 mm
Max. cutting height 45°	65 mm
Saw blade specifications	250 x 30 x 2.8 mm / 24 T and 48 T
Saw blade speed	5000 rpm
Tilt angle	0 - 45°
Table size	563 x 583 mm
Table extension	894 x 583 mm
Table material	Sheet steel

LOGISTICAL DATA

Weight net / gross	19 / 22 kg
Packaging dimensions	710 x 620 x 330 mm
Item number	5901310905
EAN	4046664064381
20 containers	189 pcs.
40 containers	399 pcs.
40 HQ containers	453 pcs.

2000 W



85 mm




65 mm



250 x 30 x 2.8 mm / 24 T / 48 T






APPLICATION EXAMPLES



Bar




Profiled boards



Mitre cuts



Longitudinal cuts



Boards



Very sturdy, thanks to frame and non-slip rubber feet.



The HS100S has a maximum cutting height of 85 mm and can effortlessly process softwood as well as hardwood.



Ergonomic working posture, thanks to a table height of 830 mm.



The table width extensions on both sides allow processing of large work pieces.



Dust can be extracted directly from the housing or saw blade guard. This allows working in particularly low-dust conditions.



The saw table shelving area of the HS100S is approximately 60% bigger than that of other manufacturers.

04/2026 Technical modifications and errors reserved.

INCLUDING

- Saw blade with 24 teeth
- Saw blade with 48 teeth

scheppach Germany

254 MM CIRCULAR TABLE SAW

HS254



Click here for optional accessories


PRODUCT DATA

Dimensions L x W x H	930 x 935 x 1000 mm
Mains voltage	220 – 240 V~
Power	2200 W
Max. cutting height 90°	85 mm
Max. cutting height 45°	63 mm
Saw blade specifications	254 x 30 x 2.6 mm / 24 T
Saw blade speed	5300 rpm
Tilt angle	0 – 45°
Table size	545 x 630 mm
Table extension	2 x 195 x 630 mm
Table material	Sheet steel

LOGISTICAL DATA

Weight net / gross	23/24,5 kg
Packaging dimensions	670 x 570 x 320 mm
Item number	5901326901
EAN	4046664223269
20 containers	245 pcs.
40 containers	476 pcs.
40 HQ containers	544 pcs.

2200 W



85 mm




63 mm




254 x 30 x 2.6 mm / 24 Z






APPLICATION EXAMPLES


Bar


Profiled boards


Mitre cuts


Longitudinal cuts


Boards


Saw blade can be tilted continuously from 0 to 45° for precise mitre cuts.


Thanks to the extra large work table with a continuous scale, even bigger work pieces can be processed precisely.


The table width extensions on both sides allow processing of large workpieces.


Mitre gauge can be adjusted from -60° to +60° – ideal for mitre cuts.

04/2026 Technical modifications and errors reserved.

INCLUDING

- **Saw blade with 24 teeth (pre-assembled)**

scheppach Germany

254 MM CIRCULAR TABLE SAW

HS105

Click here for optional accessories




PRODUCT DATA

Dimensions L x W x H	720 x 680 x 1130 mm
Mains voltage	220 – 240 V~
Power	2000 W
Max. cutting height 90°	90 mm
Max. cutting height 45°	65 mm
Saw blade specifications	254 x 30 x 2.8 mm / 24 T
Saw blade speed	4800 rpm
Tilt angle	0 - 45°
Table size	560 x 680 mm
Table extension	1055 x 680 mm
Table material	Aluminium die-cast table

LOGISTICAL DATA

Weight net / gross	29/33 kg
Packaging dimensions	810 x 730 x 335 mm
Item number	5901324901
EAN	4046664245391
20 containers	144 pcs.
40 containers	306 pcs.
40 HQ containers	357 pcs.

2000 W



90 mm




65 mm




254 x 30 x 2.8 mm / 24 Z






APPLICATION EXAMPLES


Bar


Profiled boards


Mitre cuts


Longitudinal cuts


Boards


Mitre gauge for easy mitre cutting.


The table width extension can be adjusted to the right to a max. of 1055 mm.



The HS105 has a maximum cutting height of 90 mm.


Ergonomic working posture, thanks to a table height of 880 mm.


Dust can be extracted directly from the housing. This allows working in particularly low-dust conditions.


The rip fence is secured on both sides and allows precise cuts that can be repeated with precision.

04/2026 Technical modifications and errors reserved.

INCLUDING

- **Saw blade with 24 teeth (pre-assembled)**

scheppach Germany

315 MM CIRCULAR TABLE SAW

HS120o

Click here for optional accessories




PRODUCT DATA

Dimensions L x W x H	1690 x 615 x 1055 mm	
Mains voltage	230 V~	400 V~
Power	2200 W	2800 W
Max. cutting height 90°	83 mm	
Max. cutting height 45°	49 mm	
Saw blade specifications	315 mm	
Saw blade speed	2800 rpm	
Tilt angle	0 – 45°	
Table size	800 x 550 mm	
Table extension	No	
Table material	Galvanised work table	

LOGISTICAL DATA

	230 V~	400 V
Weight net / gross	44 / 48.5 kg	45.5 / 51 kg
Packaging dimensions	545 x 500 x 320 mm	545 x 500 x 320 mm
Item number	3901302915	3901302920
EAN	4046664004929	4046664004936
20 containers	110 pcs.	110 pcs.
40 containers	225 pcs.	225 pcs.
40 HQ containers	225 pcs.	225 pcs.

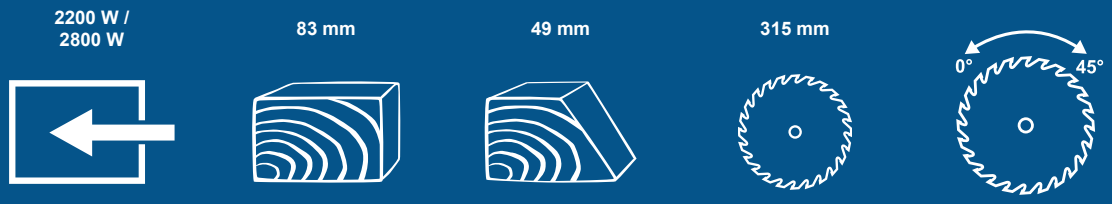

APPLICATION EXAMPLES



Mitre cuts



Longitudinal cuts



Bar



Profiled boards



Boards



Convenient transport thanks to fold-down handles and sturdy wheel assembly.



Parallel stop secured on both sides and integrated scale for particularly precise cuts.



Swivelling saw blade from 0 to 45°.



Stable parallel stop bar.

INCLUDING

- **Saw blade with 24 teeth (pre-assembled)**


scheppach Germany

04/2026 Technical modifications and errors reserved.

315 MM CIRCULAR TABLE SAW

TS310

Click here for optional accessories

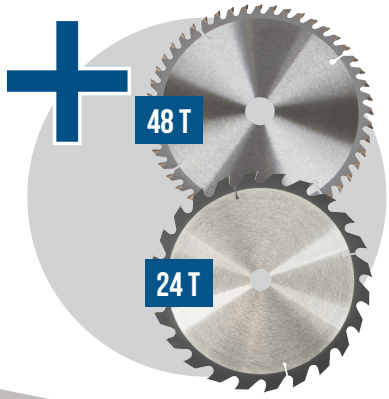



Scheppach ts 310
Oberklasse
Heimwerker Praxis 3/2014
Preis/Leistung: gut
1,5


PRODUCT DATA

Dimensions L x W x H	1750 x 1240 x 1150 mm	
Mains voltage	230 V~	400 V~
Power	2200 W	2800 W
Max. cutting height 90°	83 mm	
Max. cutting height 45°	53 mm	
Saw blade specifications	315 x 30 x 3 mm / 24 T 315 x 30 x 3,2 mm / 48 T	
Saw blade speed	2800 rpm	
Tilt angle	0 – 45°	
Table size	800 x 550 mm	
Table extension	800 x 400 mm	
Table material	Sheet steel	

LOGISTICAL DATA

	230 V~	400 V~
Weight net / gross	55 / 61 kg	58 / 63 kg
Packaging dimensions	710 x 620 x 330 mm	710 x 620 x 330 mm
Item number	4901305901	4901305902
EAN	4014915082040	4014915082057
20 containers	110 pcs.	110 pcs.
40 containers	225 pcs.	225 pcs.
40 HQ containers	225 pcs.	225 pcs.

2200 W / 2800 W



83 mm




53 mm



315 x 30 x 3 mm / 24 T
315 x 30 x 3,2 mm / 48 T





APPLICATION EXAMPLES



Mitre cuts



Longitudinal cuts



Bar



Profiled boards



Boards



The saw table shelving area of the TS310 is approximately 230% bigger than that of other manufacturers.



Table extension and widening for more surface area.



Sliding carriage – length 960 mm
Cross stop adjustable from 0 – 45°.



Easy to manoeuvre thanks to its driving mechanism.

04/2026 Technical modifications and errors reserved.

INCLUDING

- Saw blade with 24 teeth
- Saw blade with 48 teeth

scheppach Germany

SCROLL SAW

SD1600V

Click here for optional accessories



Scheppach SD1600V
Einstiegsklasse
Heimwerker Praxis 6/2016
Preis/Leistung: gut
1,7

PRODUCT DATA

Dimensions L x W x H	630 x 295 x 370 mm
Mains voltage	220 – 240 V~ / 50 Hz
Power	120 W
Saw blade length	127 / 134 mm
Max. cutting height 90°	50 mm
Swing	406 mm
Max. stroke rate	1700 rpm
Lifting height	12 mm
Table size	415 x 255 mm
Table tilt	Up to 45°
Backlight	LED lamp
Foot pedal	No

LOGISTICAL DATA

Weight net / gross	12.7 / 14.8 kg
Packaging dimensions	655 x 285 x 365 mm
Item number	5901403903
EAN	4046664037040
20 containers	402 pcs.
40 containers	864 pcs.
40 HQ containers	1008 pcs.


406 / 50 mm



500 – 1700 rpm



12 mm



415 x 255 mm



Up to 45°



LED





Ideal for delicate projects.



Work table can be tilted up to 45°



Blower nozzle allows an unobstructed view of the work piece.



Quick clamp lever for easy saw blade replacement.




Storage compartment for saw blades.

UNIVERSAL USE



Wood

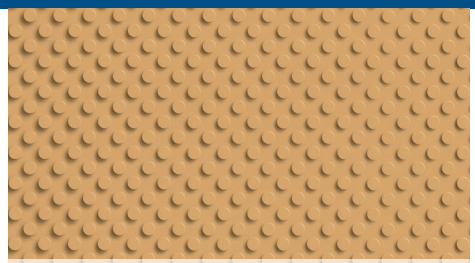

Plastic



Metal

04/2026 Technical modifications and errors reserved.

scheppach Germany

SCROLL SAW WITH FOOT PEDAL

DECO-XLS

Click here for optional accessories



PRODUCT DATA

Dimensions L x W x H	630 x 295 x 370 mm
Mains voltage	220 – 240 V~ / 50 Hz
Power	120 W
Saw blade length	127 / 134 mm
Max. cutting height 90°	50 mm
Swing	406 mm
Max. stroke rate	1700 rpm
Lifting height	12 mm
Table size	415 x 255 mm
Table tilt	Up to 45°
Backlight	LED lamp
Foot pedal	Yes

LOGISTICAL DATA

Weight net / gross	13.3 / 14.9 kg
Packaging dimensions	655 x 285 x 365 mm
Item number	5901407901
EAN	4046664107460
20 containers	402 pcs.
40 containers	864 pcs.
40 HQ containers	1008 pcs.


406 / 50 mm



500 – 1700 rpm



12 mm



415 x 255 mm



Up to 45°



LED





The work table can be tilted up to 45°.



Blower nozzle allows an unobstructed view of the work piece.



Machine can be operated using the foot pedal.




Practical storage compartment for saw blades.

UNIVERSAL USE



Wood

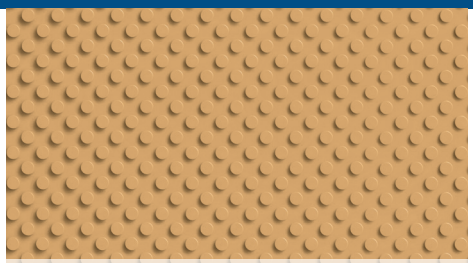

Plastic




Metal

04/2026 Technical modifications and errors reserved.

scheppach Germany

80 MM BAND SAW

HBS25

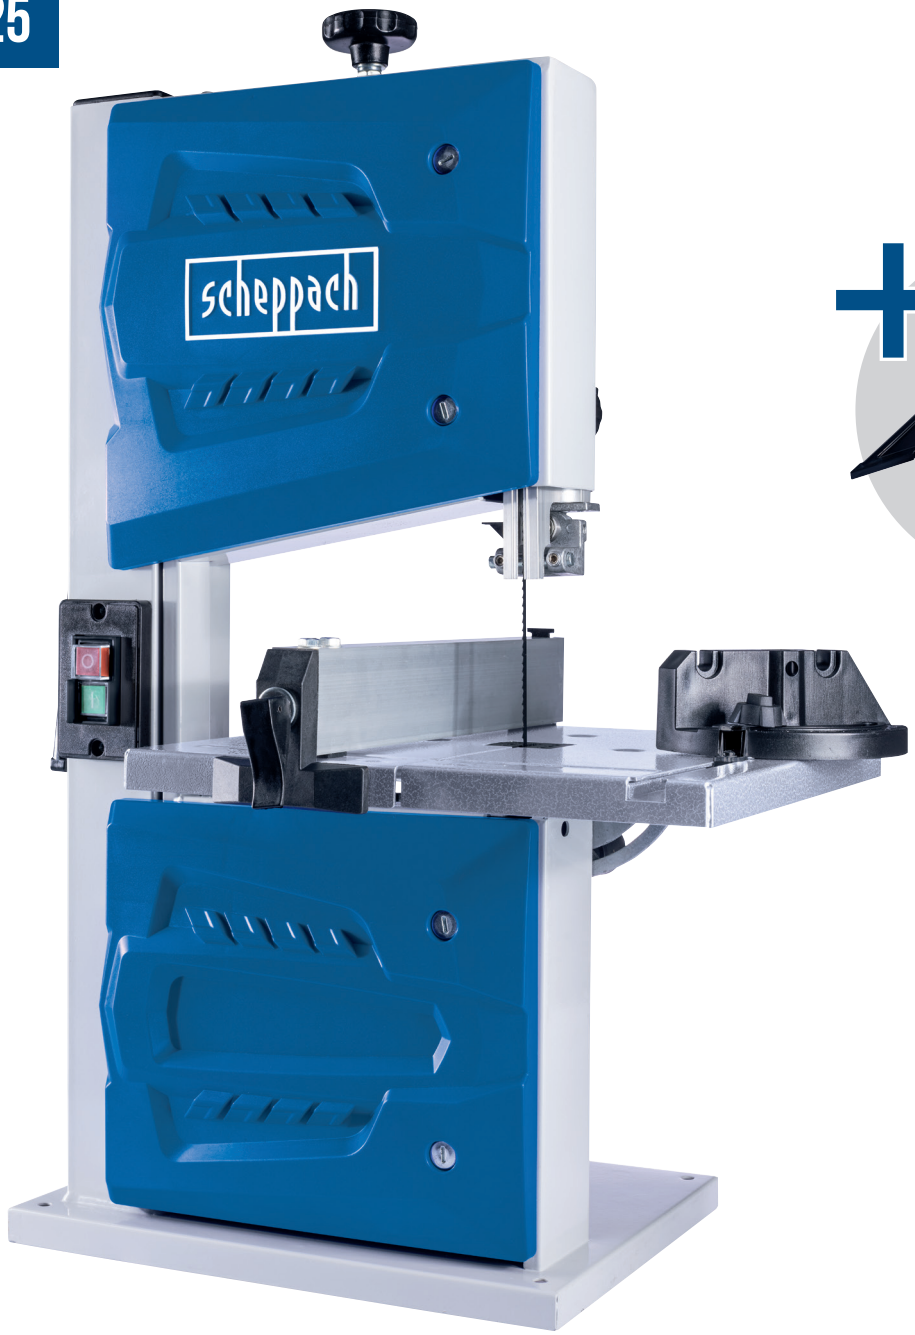



Click here for Optional accessories

PRODUCT DATA

Dimensions L x W x H	380 x 440 x 685 mm
Mains voltage	230 – 240 V~ / 50 Hz
Power	350 W
Max. clearance height	80 mm
Max. clearance width	200 mm
Saw band length	1400 mm
Saw band width	6 - 12 mm
Belt speed	900 m/min
Band wheel Ø	200 mm
Table size	300 x 300 mm
Table tilt	0° – 45°
Table width extension	No


LOGISTICAL DATA

Weight net / gross	14.75 / 16.6 kg
Packaging dimensions	720 x 260 x 350 mm
Item number	5901513901
EAN	4046664231295
20 containers	384 pcs.
40 containers	768 pcs.
40 HQ containers	917 pcs.

80 mm



200 mm



1400 mm



6 - 12 mm



900 m/min



200 mm




APPLICATION EXAMPLES



Hardwood



Softwood

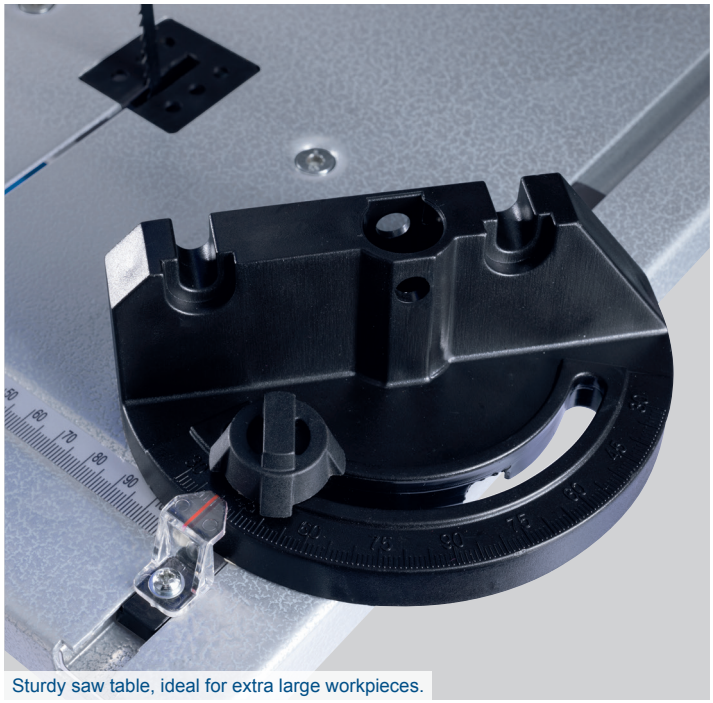

Sturdy saw table, ideal for extra large workpieces.



Infinitely adjustable saw table, ideal for angle cuts.



The HBS25 is ideal for working with both softwood and hardwood.



Even delicate work can be effortlessly implemented, thanks to the different saw band widths.

04/2026 Technical modifications and errors reserved.

INCLUDING


- Mitre gauge
- Push stick

scheppach Germany

245 MM BAND SAW

HBS261



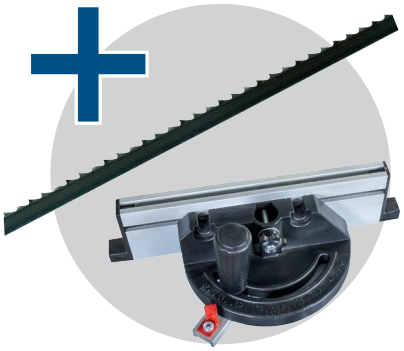

Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	570 x 475 x 845 mm
Mains voltage	230 – 240 V~ / 50 Hz
Power	550 W
Max. clearance height	130 mm
Max. clearance width	245 mm
Saw band length	1790 mm
Saw band width	6 – 13 mm
Belt speed	720 m/min 1000 m/min
Band wheel Ø	250 mm
Table size	307 x 315 mm
Table tilt	0° – 45°
Table width extension	315 – 520 mm


LOGISTICAL DATA

Weight net / gross	22 / 24 kg
Packaging dimensions	910 x 465 x 375 mm
Item number	5901514901
EAN	4046664237372
20 containers	180 pcs.
40 containers	390 pcs.
40 HQ containers	455 pcs.

130 mm



245 mm



1790 mm



6 – 13 mm



720 m/min
1000 m/min



250 mm



APPLICATION EXAMPLES



Hardwood



Softwood





Ball bearing guides enable the saw blade to run smoothly.



The HBS261 is ideal for working with both softwood and hardwood.



Even delicate work can be effortlessly implemented, thanks to the different saw band widths.

04/2026 Sous réserve de modifications techniques et d'erreurs.

INCLUDING


- Mitre gauge
- Saw band
- Push stick
- Parallel stop

scheppach Germany

315 MM BAND SAW

HBS400



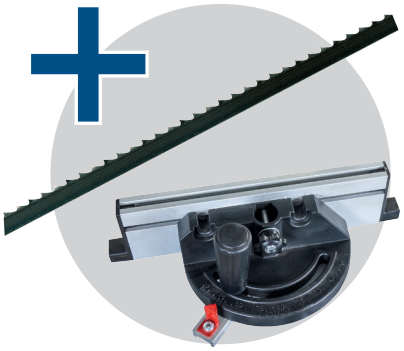


Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	840 x 590 x 1630 mm
Mains voltage	220 – 240 V~ / 50 Hz
Power	750 W
Max. clearance height	170 mm
Max. clearance width	360 mm
Saw band length	2240 mm
Saw band width	6 – 15 mm
Belt speed	720 m/min 360 m/min
Band wheel Ø	315 mm
Table size	400 x 500 mm
Table tilt	0° – 45°
Table width extension	500 - 860 mm

LOGISTICAL DATA

Weight net / gross	59 / 61 kg
Packaging dimensions	1100 x 400 x 500 mm
Item number	5901503905
EAN	4046664073703
20 containers	120 pcs.
40 containers	220 pcs.
40 HQ containers	220 pcs.

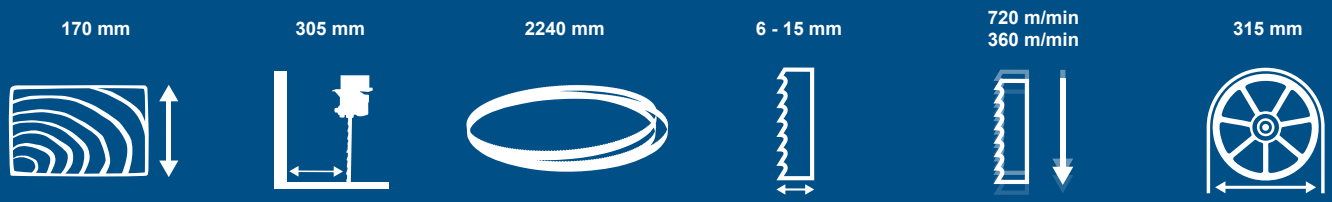

APPLICATION EXAMPLES



Hardwood



Softwood



Angle cuts are quick and easy to perform thanks to the infinitely adjustable swivel saw table.



Ball bearing guides enable the saw blade to run smoothly.



The HBS261 is ideal for working with both softwood and hardwood.



Even delicate work can be effortlessly implemented, thanks to the different saw band widths.

04/2026 Technical modifications and errors reserved.

INCLUDING

- Mitre gauge
- Saw band
- Push stick
- Parallel stop

scheppach Germany

315 MM PROFESSIONAL BAND SAW

BASA3



Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	1150 x 620 x 420 mm
Mains voltage	220 – 240 V~ / 400 V~
Power	1100 W
Max. clearance height	205 mm
Max. clearance width	306 mm
Saw band length	2360 mm
Saw band width	6 - 20 mm
Belt speed	370 – 750 m/min
Band wheel Ø	315 mm
Table size	548 x 400 mm
Table tilt	-8° – 45°
Table width extension	No

LOGISTICAL DATA

	230 V~	400 V~
Weight net / gross	79 / 84.5 kg	79 / 84.5 kg
Packaging dimensions	1150 x 620 x 420 mm	
Item number	1901503901	1901503902
EAN	4014915079019	4014915079026
20 containers	72 pcs.	
40 containers	144 pcs.	
40 HQ containers	180 pieces (with pallet)	

205 mm



306 mm



2360 mm



6 - 20 mm



370 – 750 m/min



315 mm



APPLICATION EXAMPLES




Hardwood



Softwood




Both softwood and hardwood can be processed perfectly using the BASA3.

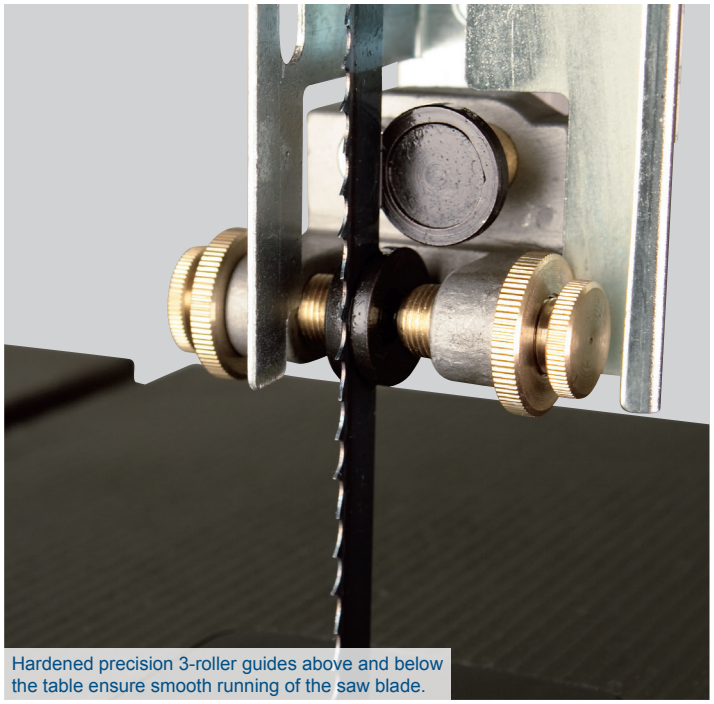

Hardened precision 3-roller guides above and below the table ensure smooth running of the saw blade.



Precise work thanks to robust rip fence.

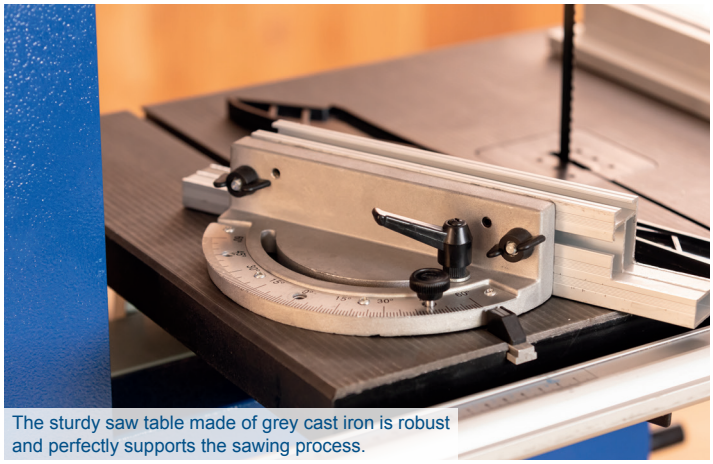

The sturdy saw table made of grey cast iron is robust and perfectly supports the sawing process.



Even delicate work can be effortlessly implemented, thanks to the different saw band widths.

04/2026 Technical modifications and errors reserved.

INCLUDING

- **Base frame with travel fixture**

scheppach Germany

TABLE ROUTER

HF60



PRODUCT DATA

Dimensions L x W x H	1030 x 450 x 530 mm
Mains voltage	230 – 240 V~ / 50 Hz
Power	1500 W
Max. cutter Ø	50 mm
Tool receiver	6, 8 & 12 mm
Spindle stroke	0 - 40 mm
Speed	11500 – 24000 rpm
Table insert diameter	Ø 32 / 47.5 / 55 / 75 mm
Table size	610 x 360 mm
Table width extension	2x 210 mm
Table material	Aluminium
Table height	311 mm

LOGISTICAL DATA

Weight net / gross	21 / 23 kg
Packaging dimensions	670 x 535 x 390 mm
Item number	5902106901
EAN	4046664137771
20 containers	192 pcs.
40 containers	384 pcs.
40 HQ containers	432 pcs.

1500 W


11500 – 24000 rpm

50 mm

Infinitely variable height adjustment


610 x 360 mm


Compact

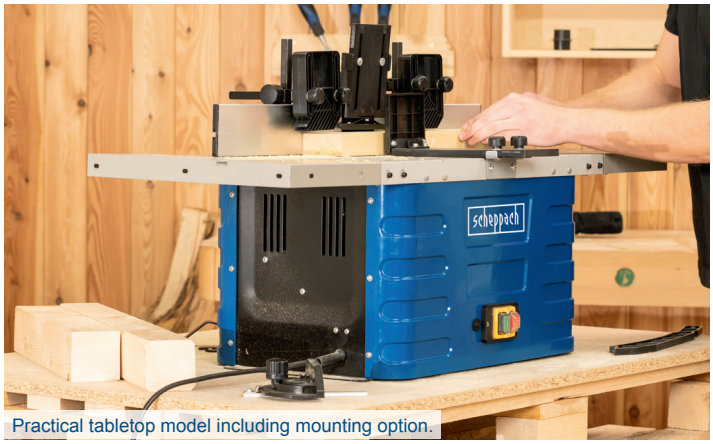

Practical tabletop model including mounting option.


Adjustable spindle height from 0 to 40 mm.

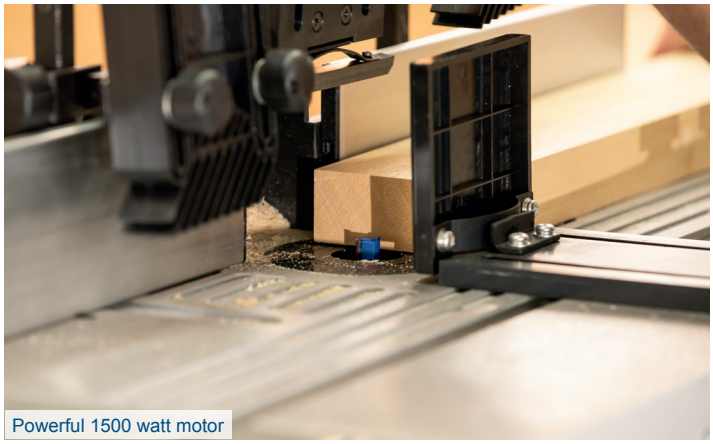
Powerful 1500 watt motor

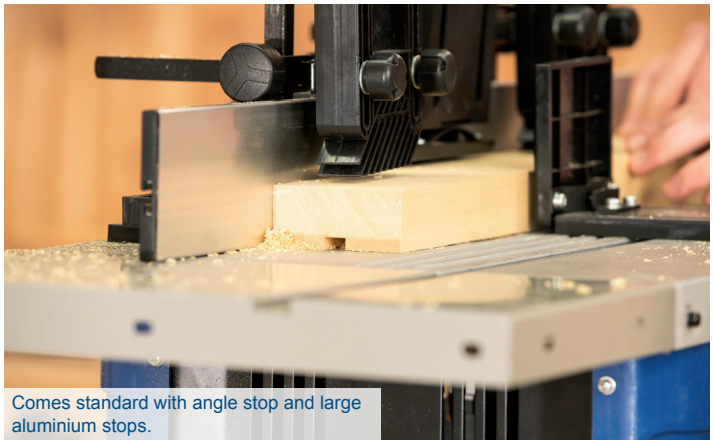
Comes standard with angle stop and large aluminium stops.


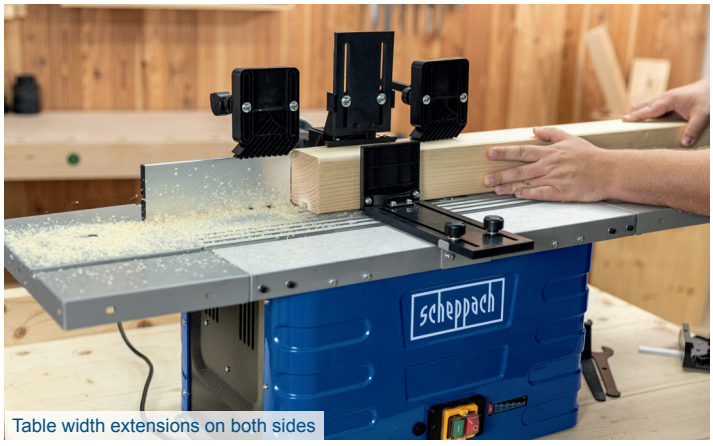


Table width extensions on both sides


Collets of 6, 8 and 12 mm

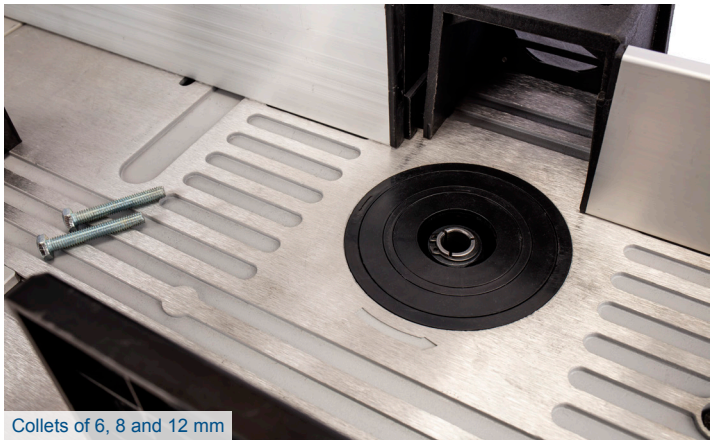

Direct extraction for dust-free working possible.

04/2026 Technical modifications and errors reserved.

scheppach Germany

204 MM PLANER/THICKNESSER

HMS850

2in1

- Dressing function
- Thickness planing function



Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	780 x 440 x 455 mm
Mains voltage	230 V ~ 50 Hz
Power	1250 W
Planer shaft speed	8000 rpm
Number of planer blades	2
Planer	
Max. planing width	204 mm
Max. chip take-off	2 mm
Planing table size	737 x 210 mm
Truing stop	90° – 135°
Thicknesser	
Max. planing width/clearance height	204 mm / 120 mm
Max. chip take-off	2 mm
Thickness planer table size	350 x 204 mm
Feed speed	6 m/min

LOGISTICAL DATA

Weight net / gross	23 / 25 kg
Packaging dimensions	830 x 465 x 440 mm
Item number	5902205901
EAN	4046664037477
20 containers	175 pcs.
40 containers	350 pcs.
40 HQ containers	420 pcs.

1250 W motor



Planer fence can be adjusted 0 – 45 °



Robust



Thickness planer table 350 x 204 mm



Planing table dimensions 737 x 210 mm



Clearance height 120 mm, planing width 204 mm



UNIVERSAL APPLICATION



Hardwood



Softwood



The planing width is 204 mm and the thickness capacity 120 mm when using the planer thicknesser function.



The planing shaft has two blades, enabling wide workpieces to be planed reliably and dimensionally accurately.



Planing fence can be swivelled from 90 to 135° – ideal for applying a chamfer.



Thicknesser



Dressing function

APPLICATION EXAMPLES



Boards



Bar



Planks

04/2026 Technical modifications and errors reserved.

scheppach Germany

254 MM PLANER/THICKNESSER

HMS1070

2in1

- Dressing function
- Thickness planing function



Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	960 x 460 x 485 mm
Mains voltage	230 V ~ 50 Hz
Power	1500 W
Planer shaft speed	8500 rpm
Number of planer blades	2
Planer	
Max. planing width	254 mm
Max. chip take-off	2 mm
Planing table size	920 x 264 mm
Truing stop	90° – 135°
Thicknesser	
Max. planing width/clearance height	120 / 254 mm
Max. chip take-off	2 mm
Thickness planer table size	380 x 254 mm
Feed speed	6 m/min

LOGISTICAL DATA

Weight net / gross	26 / 30.5 kg
Packaging dimensions	1020 x 525 x 445 mm
Item number	5902206901
EAN	4046664015253
20 containers	110 pcs.
40 containers	230 pcs.
40 HQ containers	276 pcs.

1500 W motor



Planer fence can be adjusted 0 – 45 °



Robust



Thickness planer table 280 x 254 mm



Planing table dimensions 920 x 264 mm



Clearance height 120 mm, planing width 254 mm



UNIVERSAL APPLICATION



Hardwood



Softwood



The HMS1070 is perfect as a table model, thanks to the compact dimensions



The HMS1070 has a torsion-resistant, sturdy aluminium jointing fence. Traditional manufacturers merely have a metal stop.



The planing width is 254 mm and the thickness capacity 120 mm when using the planer thicknesser function.



Work pieces with a maximum width of 254 mm can be planed reliably and accurately.

APPLICATION EXAMPLES



Boards



Bar



Planks

04/2026 Technical modifications and errors reserved.

scheppach Germany

260 MM PLANER/THICKNESSER

HMS 1500

2in1

- Dressing function
- Thickness planing function



Click here for optional accessories

LOGISTICAL DATA

Weight net / gross	71 / 76 kg
Packaging dimensions	640 x 430 x 560 mm
Item number	5902214901
EAN	4046664217589
20 containers	120 pcs.
40 containers	248 pcs.
40 HQ containers	256 pcs.

PRODUCT DATA

Dimensions L x W x H	1110 x 620 x 980 mm
Mains voltage	220 – 240 V~ / 50 Hz
Power	2200 W
Planer shaft speed	6500 rpm
Number of planer blades	2
Planer	
Max. planing width	260 mm
Max. chip take-off	3 mm
Planing table size	1040 x 280 mm
Truing stop	90° – 135°
Thicknesser	
Max. planing width/clearance height	160 / 260 mm
Max. chip take-off	3 mm
Thickness planer table size	400 x 260 mm
Feed speed	5 m/min

2200 W motor



Planer fence can be adjusted 90 – 135 °



Robust



Thickness planer table 400 x 260 mm



Planing table dimensions 1040 x 280 mm



Clearance height 160 mm, planing width 260 mm



UNIVERSAL APPLICATION



Hardwood



Softwood



Two HS planer blades with 6500 rpm enable smooth and precise planing.



Base features transport handles and wheels to ensure sturdy positioning and easy transport.



Convenient adjustment of the thickness capacity using a hand crank.



Easy conversion from planer to thicknesser without the need for tools.



Planing fence can be swivelled from 90 to 135° – ideal for applying a chamfer.

APPLICATION EXAMPLES



Boards



Bar



Planks

04/2026 Technical modifications and errors reserved.

scheppach Germany

330 MM THICKNESSER

PLM1800

selber machen
PRAXISTEST
SEHR GUT
★★★★★
scheppach
PLM1800
Heft 09/21

Dickenhobel:
Scheppach PLM1800
WORLD TOOL AWARDS
WINNER
BEST BUY
2021



Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	630 x 580 x 500 mm
Mains voltage	230 V~ / 50 Hz
Power	1500 W
Planer shaft speed	8500 rpm
Number of planer blades	2
Max. planing width/clearance height	152 mm / 330 mm
Max. chip take-off	2.8 mm
Thicknesser table size	330 x 630 mm
Feed speed	7.4 m/min

LOGISTICAL DATA

Weight net / gross	30.5 / 33 kg
Packaging dimensions	630 x 410 x 480 mm
Item number	5902208901
EAN	4046664073659
20 containers	240 pcs.
40 containers	480 pcs.
40 HQ containers	510 pcs.

Planing shaft diameter 48 mm

Chip removal up to 2.8 mm

Feed speed 7.4 m/min





2 blades in the cutterblock



Clearance height 152 mm, planing width 330 mm



UNIVERSAL APPLICATION



Hardwood



Softwood



Convenient height adjustment via the rotary knob.



Timber with a maximum size of 330 x 152 mm can be precisely processed using the PLM1800.



Workpiece return rollers for effortless operation.



Particularly clean planing is achieved with the cutterblock speed and two planer blades.



Large loading and unloading tables are the perfect support for long work pieces.

APPLICATION EXAMPLES



Boards



Bar



Planks


04/2026 Technical modifications and errors reserved.

scheppach Germany

PAINT REMOVER

LFR720

Click here for optional accessories

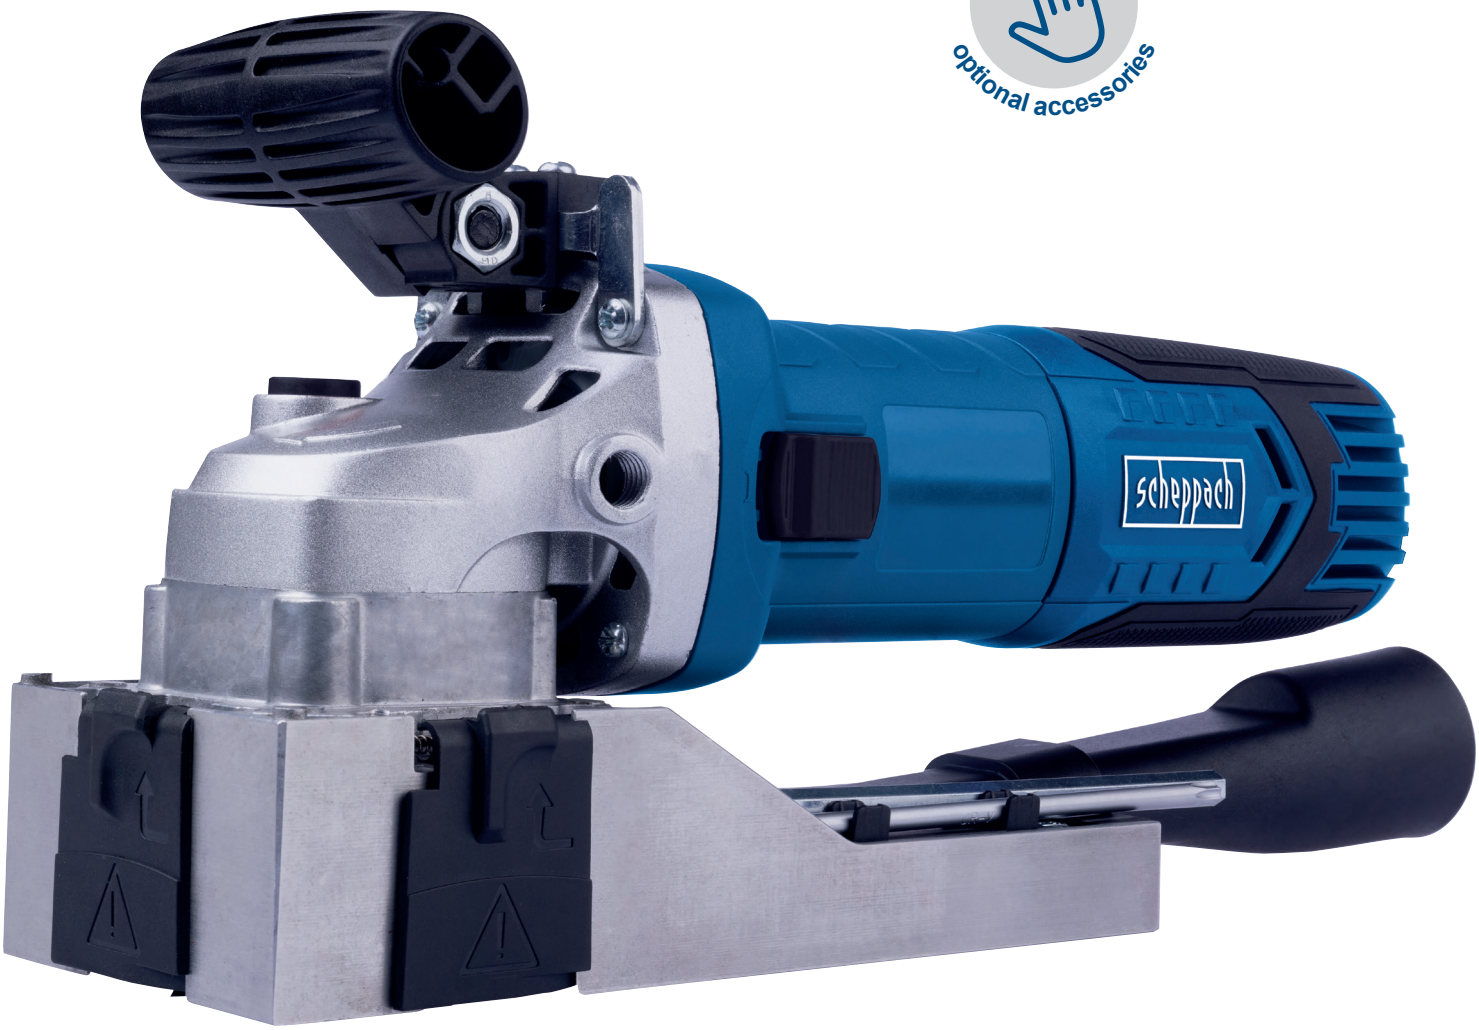


PRODUCT DATA

Dimensions L x W x H	330 x 130 x 88 mm
Mains voltage	230 V~ / 50 Hz
Power	720 W
Idle speed	10000 rpm
Milling width	80 mm
Cutting depth	0 - 0.3 mm
Lateral paint removal height	27 mm
Number of blades	4 pcs.


LOGISTICAL DATA

Weight net / gross	2.5 / 3.1 kg
Packaging dimensions	350 x 150 x 100 mm
Item number	5914901901
EAN	4046664233640
20 containers	4800 pcs.
40 containers	8000 pcs.
40 HQ containers	8000 pcs.

720 W




80 mm



0 - 0.3 mm



27 mm



10000 rpm





Ergonomic handling thanks to soft-grip surface.



Low wear and tear and rapid work progress compared to conventional grinding tools.



Borderless milling – directly at edges and in hard-to-reach areas.



Robust and durable carbide reversible blades for rapid work progress.



Stepless adjustment of the milling depth from 0 to 0.3 mm.



Flexibly adjustable handle for safe working close to edges.

SUITABLE FOR FLAT WOODEN SURFACES



For removing paint / varnish / adhesive residues

04/2026 Technical modifications and errors reserved.

scheppach Germany

CHIP EXTRACTION SYSTEM

HD2P

360°

Scheppach ha 200s
Oberklasse
Heimwerker Praxis 1/2014
Preis/Leistung: gut - sehr gut
1,5

3in1

- Chip extraction system
- Vacuum cleaner
- Pump-up function





PRODUCT DATA

Dimensions L x W x H	435 x 345 x 230 mm
Mains voltage	220 – 240 V~ / 50 / 60 Hz
Power	1250 W
Max. air flow rate	120 m³/h
Max. negative pressure	20 kPa
Hose Ø	40 mm
Hose length	2 m
Filter surface	0.175 m²
Filling quantity	5 L


LOGISTICAL DATA

Weight net / gross	5 / 6.5 kg
Packaging dimensions	475 x 385 x 245 mm
Item number	5906301901
EAN	4046664023616
20 containers	648 pcs.
40 containers	1350 pcs.
40 HQ containers	1500 pcs.

5 L



120 m³/h



3 micron



2 m








Ideal for mobile use thanks to its compact design.


Extensive accessory set, conveniently stored in a case.


Break-proof plastic housing.


Comfortable carrying handle.

UNIVERSAL APPLICATION


Dust caused by drilling


Shavings


House dust


Vacuum cleaning


Inflating


Extraction

04/2026 Technical modifications and errors reserved.

INCLUDING

- Flat nozzle
- Drilling aid attachment
- Inflation nozzle
- Option: Dust bag

scheppach Germany

65 L CHIP EXTRACTION SYSTEM

DC100

selber machen
PRAXISTEST
GUT
★★★★
scheppach
DC100
Heft 09/21



Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	400 x 400 x 750 mm
Mains voltage	220 – 240 V~ / 50 / 60 Hz
Power	1200 W
Max. air flow rate	215 m³/h
Max. negative pressure	25 kPa
Hose Ø	100 mm
Hose length	2000 mm
Filter surface	0.3 m²
Filling quantity	65 L

LOGISTICAL DATA

Weight net / gross	6 / 8 kg
Packaging dimensions	405 x 405 x 710 mm
Item number	5906306901
EAN	4046664123132
20 containers	252 pcs.
40 containers	522 pcs.
40 HQ containers	594 pcs.

65 L

215 m³/h

5 micron filter capacity

2 m

0,3 m²

25 kPa

4-part adapter set




With compact dimensions of 400 x 400 x 750 mm, the DC100 can be placed anywhere.



The adapter set allows connection to different handheld as well as stationary machines.




Compared to conventional appliances, the DC100 offers 30% more tank volume.

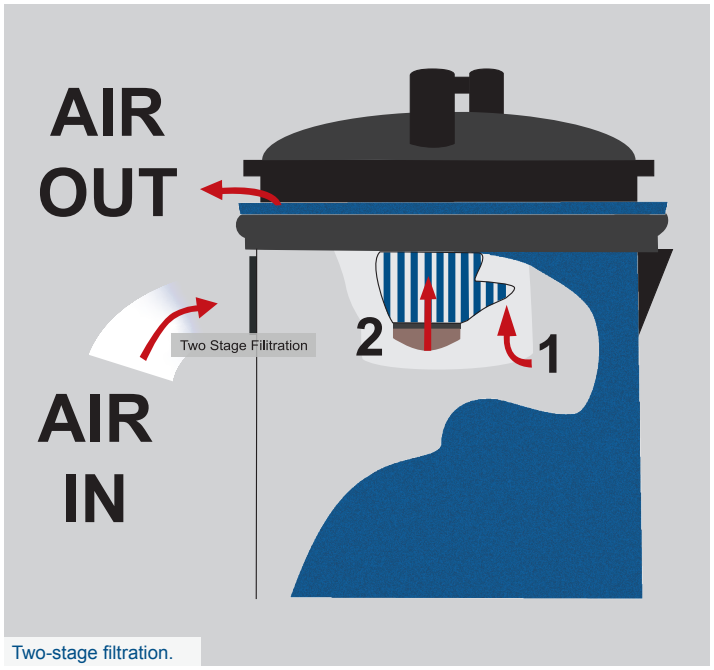


Two-stage filtration.

UNIVERSAL APPLICATION

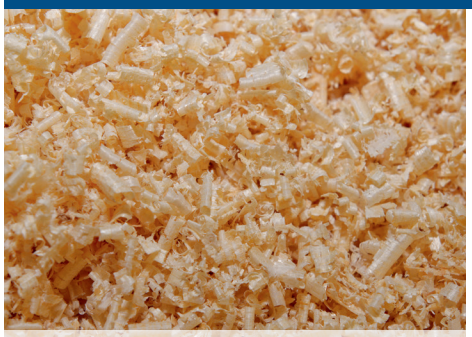

Wood shavings

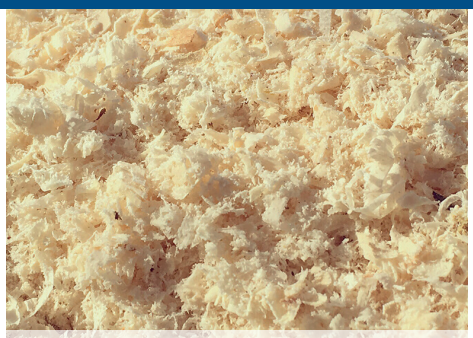

Shavings



Woodturning chippings

04/2026 Technical modifications and errors reserved.

INCLUDING

- Filter cartridge
- 4-part adapter set
- 4 paper filters

scheppach Germany

75 L CHIP EXTRACTION SYSTEM

DC500



Click here for optional accessories



PRODUCT DATA

Dimensions L x W x H	650 x 446 x 1430 mm
Mains voltage	220 - 240 V~ / 50 Hz
Power	550 W
Max. air flow rate	1150 m³/h
Max. negative pressure	900 Pa
Hose Ø	100 mm
Hose length	2000 mm
Filter surface	ca. 1 m²
Filling quantity	75 L


LOGISTICAL DATA

Weight net / gross	14 / 16 kg
Packaging dimensions	750 x 460 x 420 mm
Item number	5906307901
EAN	4046664127413
20 containers	190 pcs.
40 containers	390 pcs.
40 HQ containers	468 pcs.

75 L



1150 m³/h



2 m



1 m²

900 PA

4-part adapter set





Thanks to its extraction capacity of 1150 m³/h, the chip extraction system ensures working in particularly low-dust conditions.



The adapter set allows connection to different handheld as well as stationary machines.




Compared with conventional units, the DC500 dust bag offers 15% more collection volume.




Practical driving device.

UNIVERSAL APPLICATION

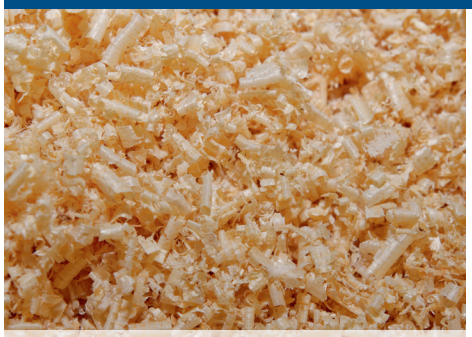

Wood shavings

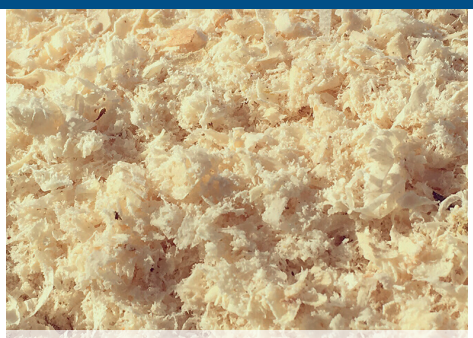

Shavings



Woodturning chippings

INCLUDING

- 4-part adapter set

scheppach Germany

04/2026 Technical modifications and errors reserved.


HEAVY DUTY AIR FILTER

HDA-14

Scheppach
Heavy Duty Luftfilter HDA-14

Oberklasse 1,5
Heimwerker Praxis 1/23
Preis/Leistung: gut – sehr gut

Click here for optional accessories

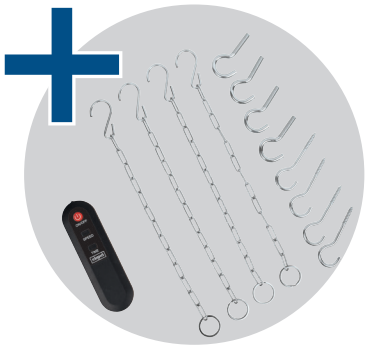



PRODUCT DATA

Dimensions L x W x H	495 x 435 x 265 mm
Mains voltage	220 – 240 V~ / 50 Hz
Power	110 W
Air power	600m³/h / 675m³/h / 740m³/h
Filter surface	0.1 m²
Filter performance	5 µm
Max. room size	400 m²
Timer function	60 min / 120 min / 240 min
Sound power level (LwA)	50dB / 55dB / 60dB

LOGISTICAL DATA

Weight net / gross	8 / 10 kg
Packaging dimensions	575 x 480 x 325 mm
Item number	5903001901
EAN	4046664129561
20 containers	324 pcs.
40 containers	672 pcs.
40 HQ containers	768 pcs.

Tool-free filter replacement




Can be ceiling-mounted



Timer function




For workshops up to 400 m² in size





Cleaning of fine dust





Fan speed can be adjusted in 3 stages.



Extremely quiet operation: 50 dB at level 1.
Level 1 50 dB / Level 2 55 dB / Level 3 60 dB



04/2026 Technical modifications and errors reserved.

INCLUDING

- **Remote control**
- **Ceiling suspension**
- **Option: 2x internal air filters, 2x external air filters, air filter set**

scheppach Germany

WOOD LATHE

DM500T

Click here for optional accessories





PRODUCT DATA

Dimensions L x W x H	890 x 325 x 415 mm
Mains voltage	230 – 240 V~ / 50 Hz
Power	400 W
Max. workpiece Ø	350 mm
Max. centre height	175 mm
Max. clamping width	500 mm
Spindle head thread	M18
Speed	890 / 1260 / 1760 / 2600 rpm^{-1}

LOGISTICAL DATA

Weight net / gross	18 / 19 kg
Packaging dimensions	910 x 305 x 435 mm
Item number	5902307901
EAN	4046664115137
20 containers	224 pcs.
40 containers	455 pcs.
40 HQ containers	546 pcs.

Max. 500 mm



Max. 350 mm



890 / 1260 / 1760 / 2600 min^{-1}



M18 x 2,5 mm



400 W



SUITABLE FOR



Long timber



Crosspiece



The DM500T is suitable for various projects.



Compact and portable design.



Large, freely adjustable tool support.



Speed adjustable via belt.

04/2026 Technical modifications and errors reserved.

INCLUDING

- Wood turning tools
- Face plate

scheppach Germany

WOOD LATHE

DM1100T

Click here for optional accessories





PRODUCT DATA

Dimensions L x W x H	1375 x 325 x 415 mm
Mains voltage	230 – 240 V~ / 50 Hz
Power	400 W
Max. workpiece Ø	350 mm
Max. centre height	175 mm
Max. clamping width	1000 mm
Spindle head thread	M18
Speed	890 / 1260 / 1760 / 2600 rpm^{-1}

LOGISTICAL DATA

Weight net / gross	20 / 22 kg
Packaging dimensions	810 x 258 x 415 mm
Item number	5902306901
EAN	4046664113874
20 containers	280 pcs.
40 containers	560 pcs.
40 HQ containers	660 pcs.

Max. 1000 mm



Max. 350 mm



890 / 1260 / 1760 / 2600 min^{-1}



M18 x 2,5 mm



400 W



SUITABLE FOR



Long timber



Crosspiece



The DM500T is suitable for various projects.



Speed adjustable via belt.



Large, freely adjustable tool support.

04/2026 Technical modifications and errors reserved.

INCLUDING

- Wood turning tools
- Face plate


scheppach Germany

WOOD LATHE

DM600VARIO

360°

Click here for optional accessories

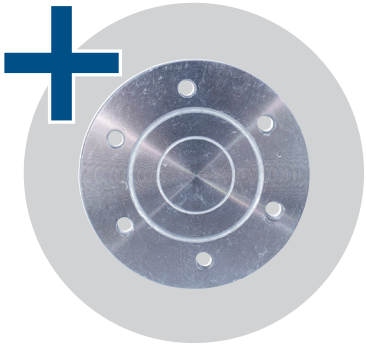



PRODUCT DATA

Dimensions L x W x H	980 x 200 x 240 mm
Mains voltage	220 – 240 V~
Power	550 W
Max. workpiece Ø	250 mm
Max. centre height	125 mm
Max. clamping width	600 mm
Spindle head thread	M 18 x 1.5 mm
Speed	800 – 3000 rpm

LOGISTICAL DATA

Weight net / gross	6.7 / 8.6 kg
Packaging dimensions	1020 x 210 x 270 mm
Item number	5902305901
EAN	4046664090038
20 containers	452 pcs.
40 containers	972 pcs.
40 HQ containers	1088 pcs.

Max. 600 mm



Max. 250 mm




800 – 3000 min^{-1}



M18 x 2,5 mm



550 W



SUITABLE FOR



Long timber



Crosspiece



The DM600 Vario is suitable for various projects.



Seamless speed adjustment.



Compact and portable design.

04/2026 Technical modifications and errors reserved.

INCLUDING

- Face plate
- 2 x open-ended spanners
- Material for workbench mounting

scheppach
Germany

200 MM WET GRINDING SYSTEM

TIGER 2000S



PRODUCT DATA

Dimensions L x W x H	460 x 270 x 310 mm
Mains voltage	230 - 240 V~ / 50 Hz
Power	120 W
Speed	120/min
Housing material	Plastic
Grindstone	
Material	Alumina
Specification	200 x 12 x 40 mm
Grain	K 220
Leather honing wheel	
Specification	222 x 12 x 30 mm

LOGISTICAL DATA

Weight net / gross	8.5 / 10 kg
Packaging dimensions	410 x 330 x 330 mm
Item number	89490916
EAN	4014915042006
20 containers	684 pcs.
40 containers	1400 pcs.
40 HQ containers	1624 pcs.



APPLICATION EXAMPLES WITH OPTIONAL ACCESSORIES



Woodturning tool



Shears




Axes



Blade



The leather disc removes the edge, thus ensuring the perfect sharpness.

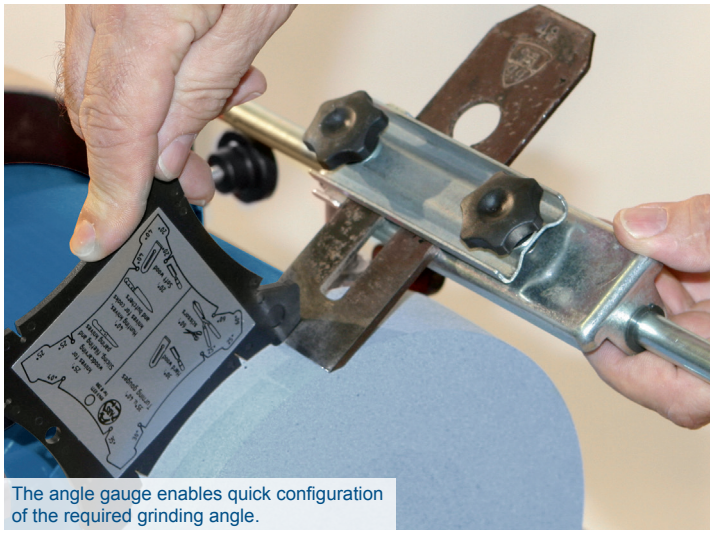

The angle gauge enables quick configuration of the required grinding angle.



Shatterproof water tank prevents annealing of the blade.



The honing paste is used for polishing the workpiece.



Universal fixture suitable for many straight standard tools.

04/2026 Technical modifications and errors reserved.

INCLUDING

- Honing paste
- Angle gauge
- Universal fixture

scheppach Germany

250 MM WET GRINDING SYSTEM

TIGER 2500



Click here for optional accessories

360°

PRODUCT DATA

Dimensions L x W x H	320 x 325 x 335 mm
Mains voltage	230 - 240 V~ / 50 Hz
Power	200 W
Speed	90/min
Housing material	Steel housing
Grindstone	
Material	Alumina
Specification	250 x 12 x 50 mm
Grain	220K
Leather honing wheel	
Specification	200 x 12 x 30 mm

LOGISTICAL DATA

Weight net / gross	16 / 18 kg
Packaging dimensions	390 x 380 x 390 mm
Item number	5903202901
EAN	4046664037491
20 containers	500 pcs.
40 containers	1000 pcs.
40 HQ containers	1020 pcs.

200 mm



40 mm



220K



12 mm



220 x 30 mm



120/min



APPLICATION EXAMPLES WITH OPTIONAL ACCESSORIES



Woodturning tool



Shears


Axes


Blade


The leather disc removes the edge, thus ensuring the perfect sharpness.

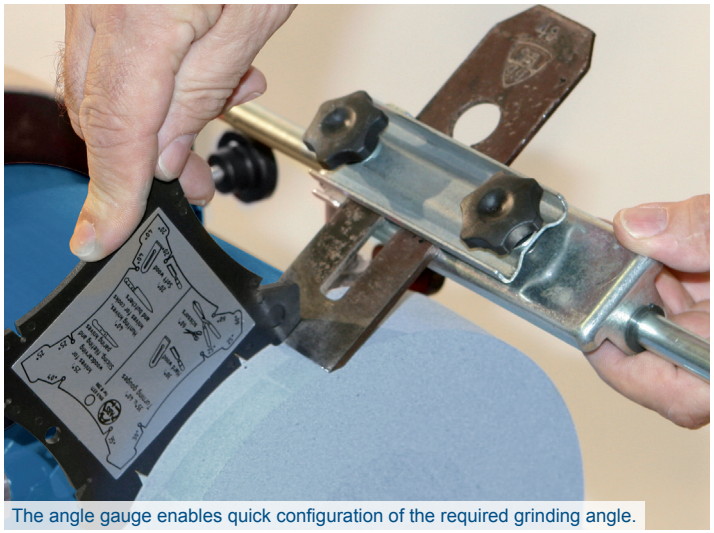
The angle gauge enables quick configuration of the required grinding angle.

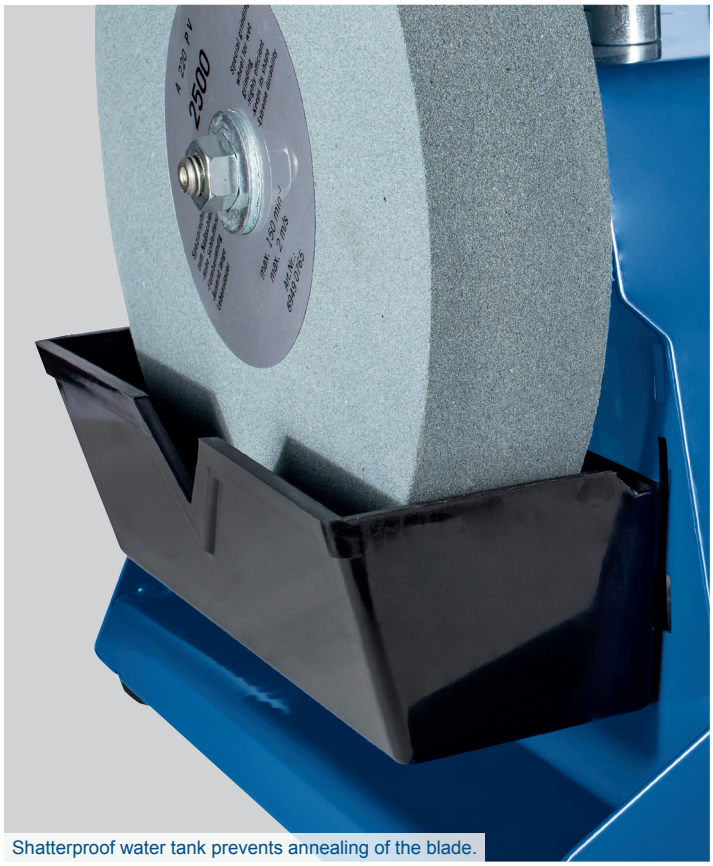

Shatterproof water tank prevents annealing of the blade.


The honing paste is used for polishing the workpiece.


Universal fixture suitable for many straight standard tools.

04/2026 Technical modifications and errors reserved.

INCLUDING

- Honing paste
- Angle gauge
- Universal fixture

scheppach Germany

200 MM WET GRINDING SYSTEM

TIGER 5000S



PRODUCT DATA

Dimensions L x W x H	290 x 330 x 270 mm
Mains voltage	230 - 240 V~ / 50 Hz
Power	150 W
Speed	115/min
Housing material	Plastic
Grindstone	
Material	Alumina
Specification	200 x 12 x 40 mm
Grain	K 220
Leather honing wheel	
Specification	200 x 12.5 x 30 mm

LOGISTICAL DATA

Weight net / gross	9 / 10.5 kg
Packaging dimensions	430 x 370 x 340 mm
Item number	5903205901
EAN	4046664096221
20 containers	500 pcs.
40 containers	1000 pcs.
40 HQ containers	1186 pcs.

200 mm | 40 mm | 220K | 12 mm | 200 x 30 mm | 115/min

APPLICATION EXAMPLES WITH OPTIONAL ACCESSORIES



Woodturning tool



Shears




Axes



Blade



The leather disc removes the edge, thus ensuring the perfect sharpness.

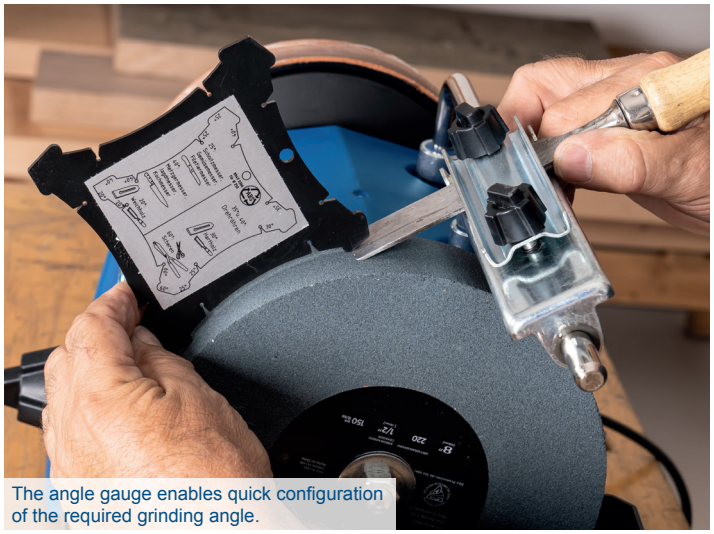

The angle gauge enables quick configuration of the required grinding angle.



Shatterproof water tank prevents annealing of the blade.



The honing paste is used for polishing the workpiece.



Universal fixture suitable for many straight standard tools.

04/2026 Technical modifications and errors reserved.


INCLUDING

- Honing paste
- Angle gauge
- Universal fixture

scheppach Germany

250 MM WET GRINDING SYSTEM

TIGER 7000S

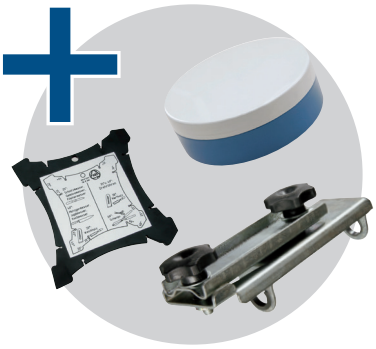

Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	455 x 270 x 355 mm
Mains voltage	230 - 240 V~ / 50 Hz
Power	200 W
Speed	115/min
Housing material	Plastic
Grindstone	
Material	Corundum grindstone
Specification	250 x 12 x 40 mm
Grain	K 220
Leather honing wheel	
Specification	200 x 12.5 x 30 mm

LOGISTICAL DATA

Weight net / gross	12 / 14 kg
Packaging dimensions	445 x 375 x 365 mm
Item number	5903206901
EAN	4046664096245
20 containers	468 pcs.
40 containers	935 pcs.
40 HQ containers	1127 pcs.

250 mm



50 mm



220K



12 mm



200 x 30 mm



115/min



APPLICATION EXAMPLES WITH OPTIONAL ACCESSORIES



Woodturning tool



Shears




Axes



Blade



The leather disc removes the edge, thus ensuring the perfect sharpness.

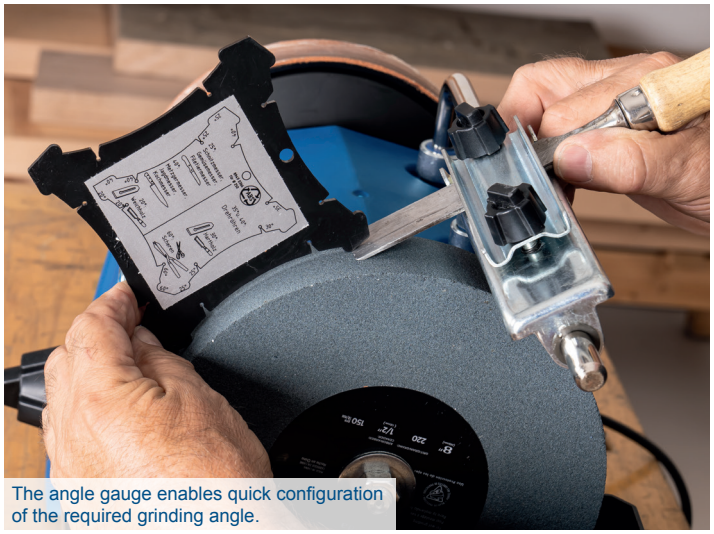

The angle gauge enables quick configuration of the required grinding angle.



Shatterproof water tank prevents annealing of the blade.



The honing paste is used for polishing the workpiece.



Universal fixture suitable for many straight standard tools.

04/2026 Technical modifications and errors reserved.

INCLUDING

- Honing paste
- Angle gauge
- Universal fixture

scheppach Germany

200 MM WET GRINDING SYSTEM

TIGER 5000S HOMEKIT



Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	290 x 330 x 270 mm
Mains voltage	230 - 240 V~ / 50 Hz
Power	150 W
Speed	115/min
Housing material	Plastic
Grindstone	
Material	Alumina
Specification	200 x 12 x 40 mm
Grain	K 220
Leather honing wheel	
Specification	200 x 12.5 x 30 mm

LOGISTICAL DATA

Weight net / gross	9 / 11.5 kg
Packaging dimensions	470 x 370 x 340 mm
Item number	5903205903
EAN	4046664096238
20 containers	500 pcs.
40 containers	1000 pcs.
40 HQ containers	1186 pcs.

200 mm



40 mm



220K



12 mm



200 x 30 mm



115/min



APPLICATION EXAMPLES WITH OPTIONAL ACCESSORIES



Woodturning tool



Shears




Grinds axes up to 170 mm head length



Suitable for knives with a blade length from 40 mm to 100 mm.



Universal fixture suitable for many straight standard tools.

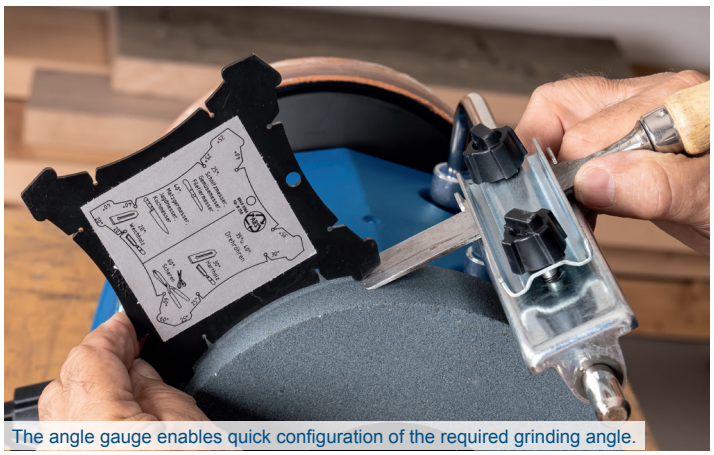

The angle gauge enables quick configuration of the required grinding angle.



Increases the grain size for particularly fine grinding; the other side is perfect for high material removal.



The honing paste is used for polishing the workpiece.

04/2026 Technical modifications and errors reserved.

INCLUDING

- **Knife sharpening jig**
- **Axes and common straight standard tools**
- **Honing paste**
- **Angle gauge**
- **Stone grader**

scheppach Germany

250 MM WET GRINDING SYSTEM

TIGER 7000S HOMEKIT



Click here for optional accessories



Water-Cooled Sharpener
Scheppach Tiger 7000S Home Kit
WORLD TOOL AWARDS
WINNER
PREMIUM
2023

PRODUCT DATA

Dimensions L x W x H	455 x 270 x 355 mm
Mains voltage	230 - 240 V~ / 50 Hz
Power	200 W
Speed	115/min
Housing material	Plastic
Grindstone	
Material	Corundum grindstone
Specification	250 x 12 x 40 mm
Grain	K 220
Leather honing wheel	
Specification	200 x 12.5 x 30 mm

LOGISTICAL DATA

Weight net / gross	12.5 / 15 kg
Packaging dimensions	445 x 375 x 365 mm
Item number	5903206903
EAN	4046664096160
20 containers	468 pcs.
40 containers	935 pcs.
40 HQ containers	1127 pcs.

250 mm



50 mm



220K



12 mm



200 x 30 mm



115 rpm



APPLICATION EXAMPLES WITH OPTIONAL ACCESSORIES



Woodturning tool



Shears




Grinds axes up to 170 mm head length



Suitable for knives with a blade length from 40 mm to 100 mm.



Universal fixture suitable for many straight standard tools.

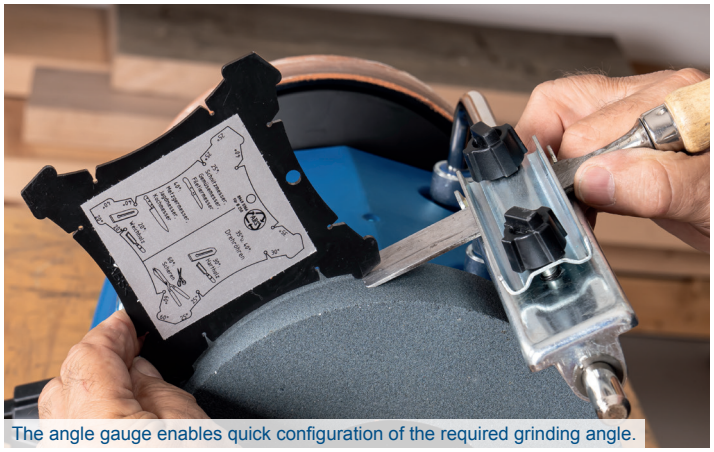

The angle gauge enables quick configuration of the required grinding angle.



Increases the grain size for particularly fine grinding; the other side is perfect for high material removal.



The honing paste is used for polishing the workpiece.

04/2026 Technical modifications and errors reserved.

INCLUDING

- **Knife sharpening jig**
- **Axes and common straight standard tools**
- **Honing paste**
- **Angle gauge**
- **Stone grader**

scheppach Germany

150 MM BENCH GRINDER

SM150L

2in1

- Sharpen
- Sanding



360°

PRODUCT DATA

Dimensions L x W x H	380 x 210 x 280 mm
Mains voltage	230 V / 50 Hz
Power	400 W
Material	Alumina
Specification L/R	150 x 20 x 12.7 mm
Grain size L/R	K36 / K60
Speed	2980 rpm
Housing material	Cast iron
LED	Yes
Water tank	No

LOGISTICAL DATA

Weight net / gross	8 / 9 kg
Packaging dimensions	390 x 251 x 238 mm
Item number	5903107901
EAN	4046664064589
20 containers	1100 pcs.
40 containers	2200 pcs.
40 HQ containers	2700 pcs.

Aluminium oxide grindstone 150 x 20 mm



12.7 mm



36 / 60 K



LED work light



Variable workpiece support




2980 rpm



AREAS OF APPLICATION



Metal pipe

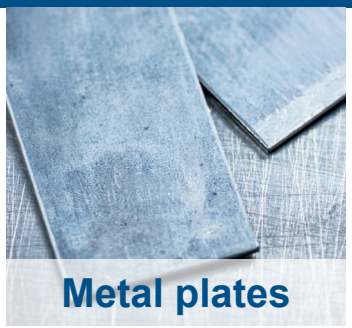

Metal plates



Copper



Stainless steel




Sharpen



LED lights



Sanding

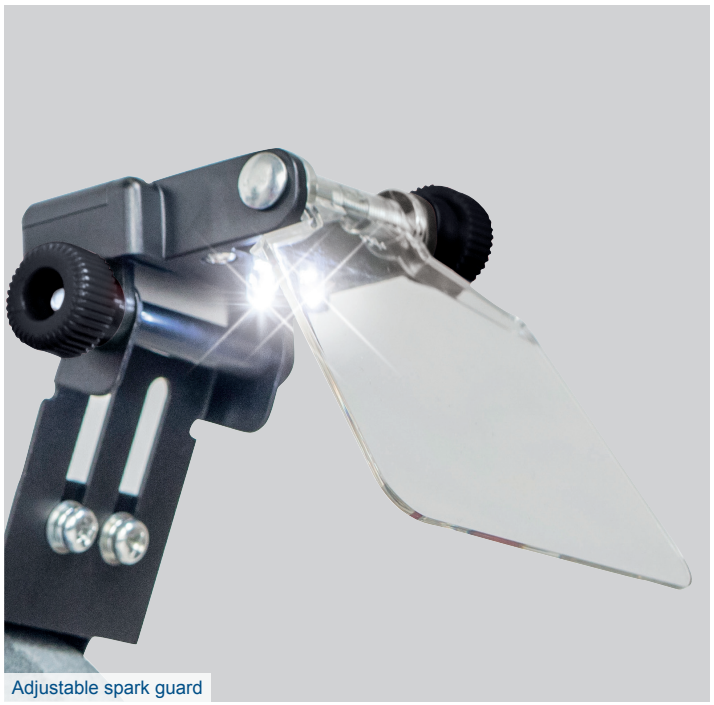

Adjustable spark guard

04/2026 Technical modifications and errors reserved.

scheppach Germany

150 MM BENCH GRINDER

SM150LB

2in1

- Sharpen
- Sanding



360°

PRODUCT DATA

Dimensions L x W x H	380 x 210 x 280 mm
Mains voltage	230 V / 50 Hz
Power	400 W
Speed	2980 rpm
Housing material	Cast iron
LED	Yes
Water tank	No
Grindstone	
Material	Alumina
Specification	150 x 20 x 12.7 mm
Grain	K36
Wire brush	
Specification	150 x 13.5 x 12.7 mm

LOGISTICAL DATA

Weight net / gross	7.5 / 8.5 kg
Packaging dimensions	390 x 251 x 238 mm
Item number	5903108901
EAN	4046664064596
20 containers	1100 pcs.
40 containers	2200 pcs.
40 HQ containers	2700 pcs.

Aluminium oxide grindstone 150 x 20 mm



12.7 mm



36 / 60 K



LED work light



Variable workpiece support



2980 rpm



AREAS OF APPLICATION



Metal pipe



Metal plates



Copper



Stainless steel



Sharpen



Wire brush, suitable for cleaning, derusting, descaling and roughening



Sanding



Used for: rust removal, cleaning of ferrous and non-ferrous metals, preparation for soldering and welding.

04/2026 Technical modifications and errors reserved.

scheppach Germany

200 MM BENCH GRINDER

SM200L

2in1

- Sharpen
- Sanding



360°

PRODUCT DATA

Dimensions L x W x H	390 x 260 x 290 mm
Mains voltage	230 – 240 V~ / 50 Hz
Power	500 W
Material	Aluminium oxide
Specification L/R	200 x 20 x 15.88 mm
Grain size L/R	K36 / K60
Speed	2850 rpm
Housing material	Aluminium
LED	Yes
Water tank	No

LOGISTICAL DATA

Weight net / gross	12 / 13.5 kg
Packaging dimensions	430 x 330 x 310 mm
Item number	5903109901
EAN	4046664064602
20 containers	670 pcs.
40 containers	1300 pcs.
40 HQ containers	1490 pcs.

2x aluminium oxide grindstones 200 x 20 mm

15.88 mm

36 / 60 K

LED work light


Variable workpiece support

2850 rpm

AREAS OF APPLICATION



Metal pipe

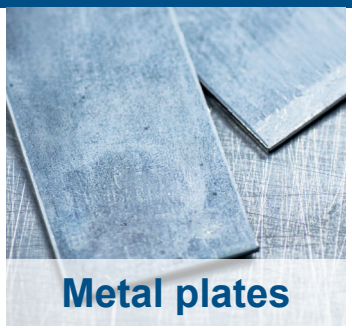

Metal plates




Copper



Stainless steel



Sharpen

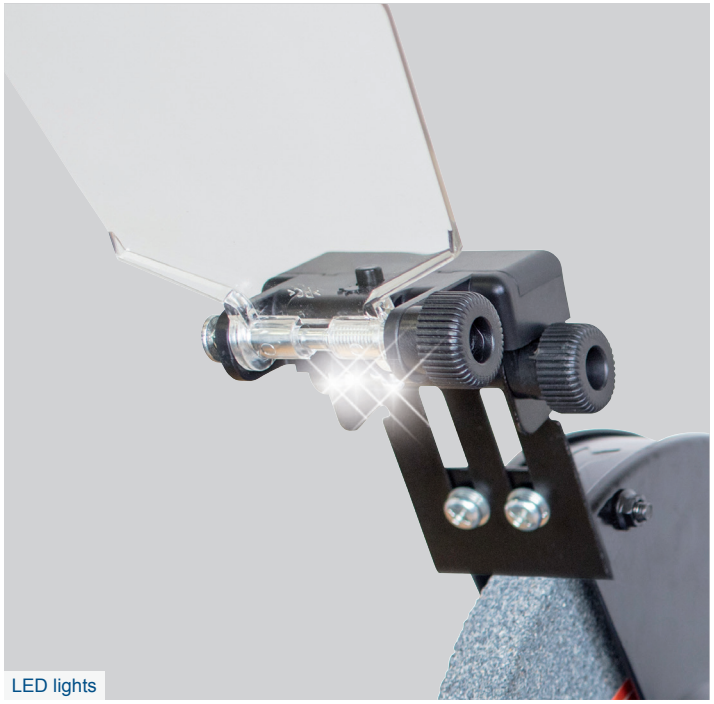

LED lights



Sanding



Adjustable spark guard

04/2026 Technical modifications and errors reserved.

200 MM BENCH GRINDER

SM200AL

2in1

- Sharpen
- Sanding



360°

PRODUCT DATA

Dimensions L x W x H	390 x 260 x 290 mm
Mains voltage	230 – 240 V~ / 50 Hz
Power	500 W
Material	Aluminium oxide
Specification L/R	200 x 20 x 15.88 mm / 200 x 40 x 15.88 mm
Grain size L/R	K36 / K60
Speed	2850 rpm
Housing material	Aluminium
LED	Yes
Water tank	No

LOGISTICAL DATA

Weight net / gross	13.5 / 14.5 kg
Packaging dimensions	445 x 335 x 310 mm
Item number	5903110901
EAN	4046664064657
20 containers	640 pcs.
40 containers	1220 pcs.
40 HQ containers	1400 pcs.

2x aluminium oxide grindstones 200 x 20/40 mm

15.88 mm

100 / 60 K

LED work light


Variable workpiece support

2980 rpm

AREAS OF APPLICATION



Metal pipe

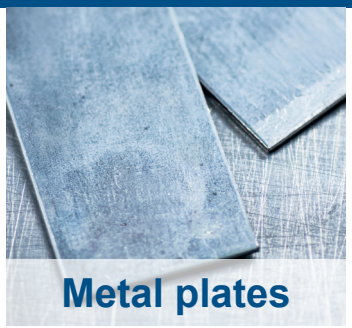

Metal plates



Copper



Stainless steel




Sharpen



LED lights



Sanding

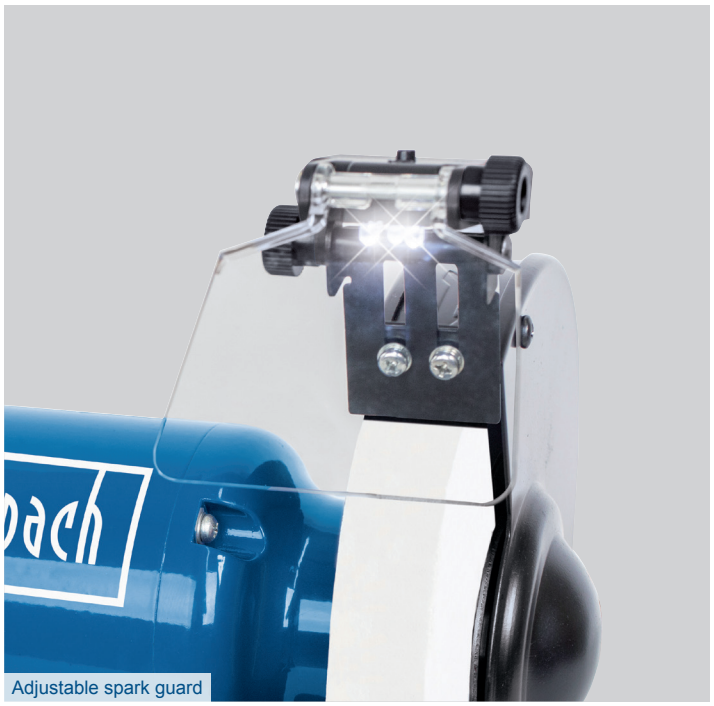

Adjustable spark guard

04/2026 Technical modifications and errors reserved.

200 MM BENCH GRINDER

SM200LB

2in1

- Sharpen
- Sanding



PRODUCT DATA

Dimensions L x W x H	390 x 260 x 290 mm
Mains voltage	230–240 V~ / 50 Hz
Power	500 W
Material	Aluminium oxide
Specification L/R	200 x 20 x 15.88 mm / 200 x 16 x 15.88 mm
Grain	K36
Speed	2980 rpm
Housing material	Aluminium
LED	Yes
Water tank	No

LOGISTICAL DATA

Weight net / gross	11.5 / 13 kg
Packaging dimensions	430 x 330 x 310 mm
Item number	5903111901
EAN	4046664123712
20 containers	670 pcs.
40 containers	1300 pcs.
40 HQ containers	1490 pcs.

Aluminium oxide grindstone 200 x 20 mm



15.88 mm



36K



LED work light



Variable workpiece support



2980 rpm



AREAS OF APPLICATION



Metal pipe



Metal plates



Copper



Stainless steel



Sharpen



Wire brush, suitable for cleaning, derusting, descaling and roughening



Sanding



Used for: rust removal, cleaning of ferrous and non-ferrous metals, preparation for soldering and welding

04/2026 Technical modifications and errors reserved.

150 MM BENCH GRINDER

BG 150

3in1

- Sanding
- Polishing
- Sharpen



360°

PRODUCT DATA

Dimensions L x W x H	395 x 260 x 310 mm
Mains voltage	230 – 240 V / 50 Hz
Power	370 W
Material	Alumina
Specification	150 x 25 x 12.7 mm
Grain size L/R	K36 / K60
Speed	2980 rpm
Housing material	Cast iron
LED	No
Water tank	No

LOGISTICAL DATA

Weight net / gross	10 / 11 kg
Packaging dimensions	440 x 255 x 280 mm
Item number	4903104901
EAN	4014915082125
20 containers	1050 pcs.
40 containers	2200 pcs.
40 HQ containers	2500 pcs.

Aluminium oxide grindstone 150 x 25 mm



12.7 mm



36 / 60 K



Work light



Variable workpiece support




2980 rpm



AREAS OF APPLICATION


Metal pipe

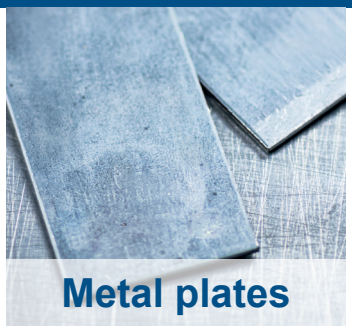
Metal plates


Copper


Stainless steel



Sharpen


Work light



Sanding


Adjustable spark guard

04/2026 Technical modifications and errors reserved.

200 MM WET AND DRY GRINDING MACHINE

BG200W

3in1

- Sanding
- Polishing
- Sharpen



PRODUCT DATA

Dimensions L x W x H	480 x 280 x 300 mm
Mains voltage	220 - 240 V~ / 50 Hz
Power	250 W
Speed	136 rpm
Housing material	Cast iron
LED	Yes
Water tank	Yes
Dry grinding disc	
Material	Aluminium oxide
Specification	150 x 20 x 12.7 mm
Grain	60 / 80 K
Speed	2850 rpm
Wet grinding disc	
Material	Aluminium oxide
Specification	200 x 40 x 20 mm
Grain	80K

360°

LOGISTICAL DATA

Weight net / gross	12 / 13 kg
Packaging dimensions	485 x 330 x 360 mm
Item number	5903105903
EAN	4046664037507
20 containers	500 pcs.
40 containers	1000 pcs.
40 HQ containers	1100 pcs.

Aluminium oxide grindstone 150 x 25 mm



Diameter / Width Wet grindstone 200 x 40 mm



Grinding stone mounting 12.7 mm Wet stone mounting 20 mm



60 / 80 K



2850 rpm (dry) 130 rpm (wet)




250 W



AREAS OF APPLICATION



Metal pipe

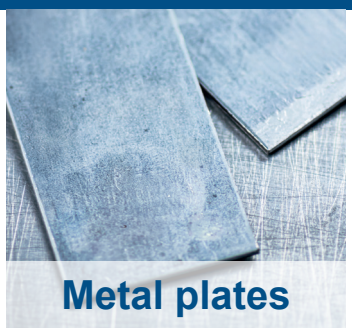

Metal plates



Copper



Stainless steel



The workpiece support and spark protection are adjustable.



The grindstone is cooled with water and protects the work piece from annealing.



The wet-grinding disc rotates slowly and is perfect for precise grinding.

04/2026 Technical modifications and errors reserved.

200 MM BENCH GRINDER

BG200

3in1

- Sanding
- Polishing
- Sharpen



360°

PRODUCT DATA

Dimensions L x W x H	440 x 280 x 340 mm
Mains voltage	230 – 240 V~
Power	550 W
Material	Aluminium oxide
Specification	200 x 25 x 15.88 mm
Grain size L/R	K36 / K60
Speed	2980 rpm
Housing material	Cast iron
LED	No
Water tank	Yes

LOGISTICAL DATA

Weight net / gross	15.2 / 16.5 kg
Packaging dimensions	480 x 345 x 320 mm
Item number	4903105901
EAN	4014915082132
20 containers	560 pcs.
40 containers	1120 pcs.
40 HQ containers	1200 pcs.

Aluminium oxide grind-stone 150 x 25 mm



15.88 mm



36 / 60 K



Work light



Variable workpiece support




2980 rpm



AREAS OF APPLICATION


Metal pipe

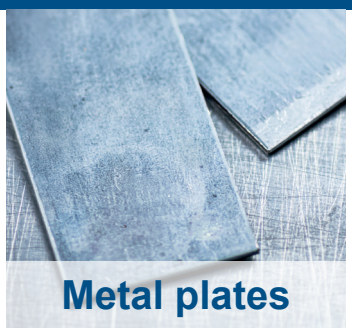
Metal plates


Copper


Stainless steel


Sharpen


Work light


Sanding


Adjustable spark guard

04/2026 Technical modifications and errors reserved.

200 MM BENCH GRINDER

BG200AL

3in1

- Sanding
- Polishing
- Sharpen



360°

PRODUCT DATA

Dimensions L x W x H	400 x 200 x 390 mm
Mains voltage	230 – 240 V~
Power	550 W
Material	Aluminium oxide
Specification	200 x 25 x 15.88 mm / 200 x 40 x 15.88 mm
Grain size L/R	K60 / K100
Speed	2980 rpm
Housing material	Cast iron
LED	No
Water tank	No

LOGISTICAL DATA

Weight net / gross	16.5 / 18 kg
Packaging dimensions	480 x 340 x 320 mm
Item number	4903106901
EAN	4014915082583
20 containers	535 pcs.
40 containers	1070 pcs.
40 HQ containers	1150 pcs.

Aluminium oxide grindstone 200 x 25 / 40 mm



15.88 mm



60 / 100 K



Work light



Variable workpiece support




2980 rpm




AREAS OF APPLICATION


Metal pipe

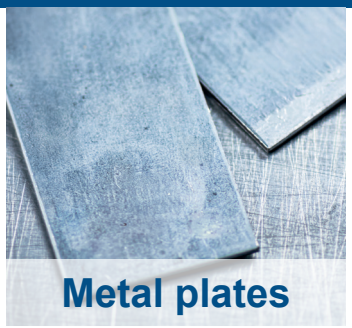
Metal plates


Copper


Stainless steel

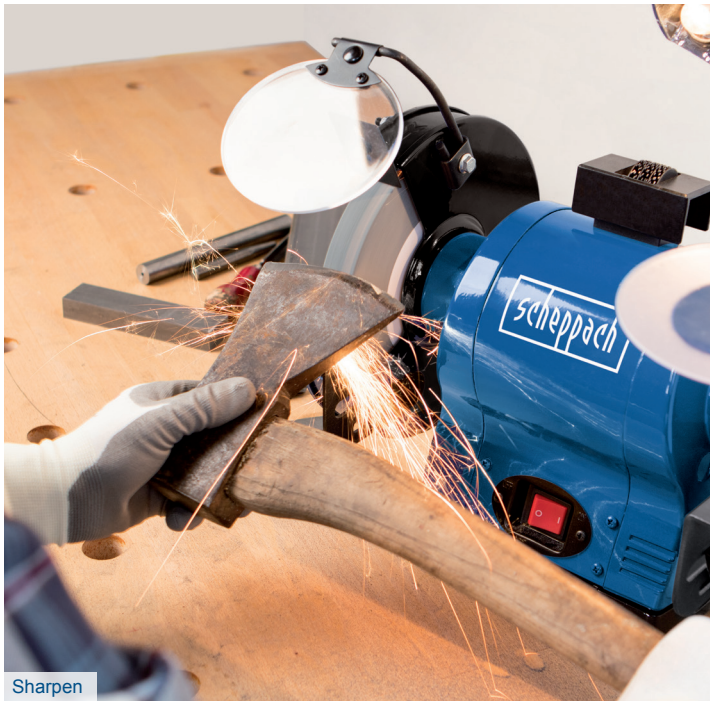


Sharpen



Work light



Sanding

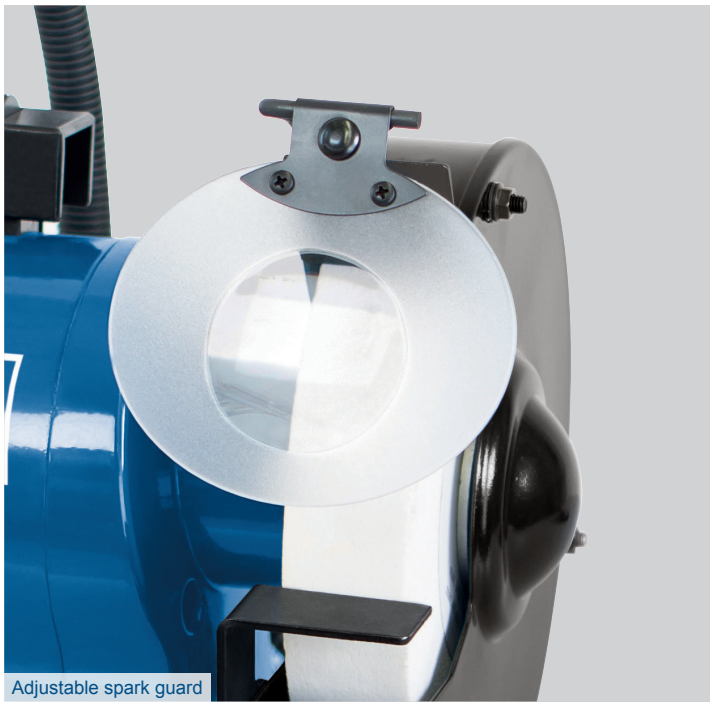
Adjustable spark guard

04/2026 Technical modifications and errors reserved.

COMBINATION GRINDING MACHINE

BGS700

2in1

- Sharpen
- Sanding



Click here for optional accessories

360°

PRODUCT DATA

Dimensions L x W x H	405 x 305 x 355 mm
Mains voltage	230 – 240 V~ / 50 Hz
Power	370 W
Speed	2980 rpm
Housing material	Cast iron
Grindstone	
Material	Aluminium oxide
Specification	150 x 20 x 12.7 mm
Grain	36K
Grinding belt	
Grinding belt length/width	50 x 686 mm
Belt speed	15.6 m/s

LOGISTICAL DATA

Weight net / gross	10 / 11.5 kg
Packaging dimensions	440 x 395 x 255 mm
Item number	4903303901
EAN	4014915082149
20 containers	760 pcs.
40 containers	1400 pcs.
40 HQ containers	1500 pcs.

Aluminium oxide grindstone 150 x 20 mm



Grinding belt 686 x 50 mm



12.7 mm



36K



Work light




Variable workpiece support



AREAS OF APPLICATION



Metal pipe

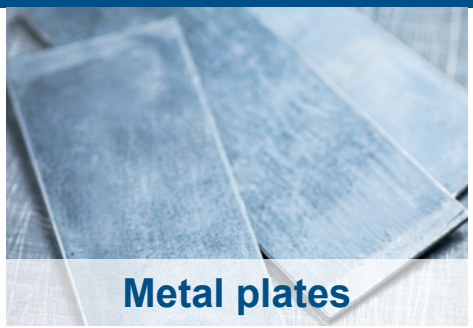

Metal plates



Copper




Stainless steel



Wood



The grindstone dresser can be used to clean and dress the grindstone

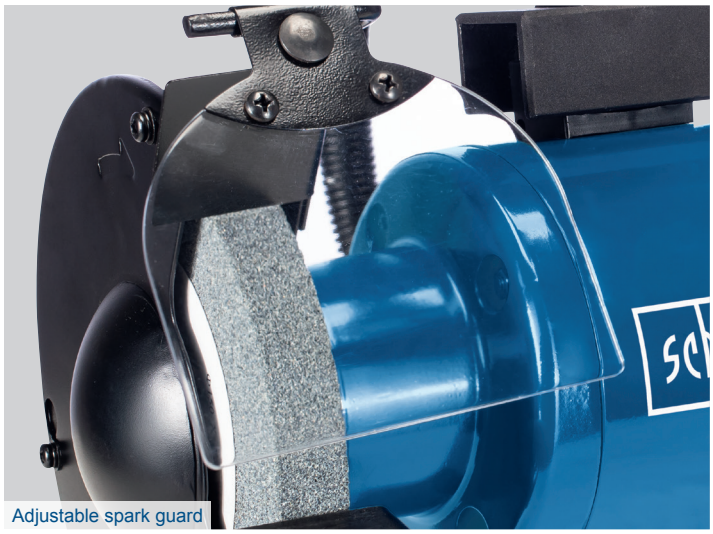

Adjustable spark guard



Work light

04/2026 Technical modifications and errors reserved.

BELT AND DISC SANDER

BTS700



Click here for optional accessories

360°

PRODUCT DATA

Dimensions L x W x H	365 x 300 x 395 mm
Mains voltage	230 – 240 V~ / 50 Hz
Power	250 W
Grinding wheel	
Grinding wheel Ø	125 mm
Grinding wheel speed	860 m/min
Table tilt	90° – 45°
Grinding belt	
Grinding belt length/width	762 / 25.4 mm
Belt speed	860 m/min
Housing material	Solid metal

LOGISTICAL DATA

Weight net / gross	7.5 / 9 kg
Packaging dimensions	445 x 315 x 300 mm
Item number	4903304901
EAN	4046664037712
20 containers	630 pcs.
40 containers	1260 pcs.
40 HQ containers	1350 pcs.

Grinding wheel 125 mm diameter



Grinding belt length 762 x 25.4 mm



Grinding wheel with Velcro



Support table 0° to 45°



Swivelling saw table 0° – 45°



Compact dimensions 365 x 300 x 395 mm




AREAS OF APPLICATION



Softwood



Hardwood

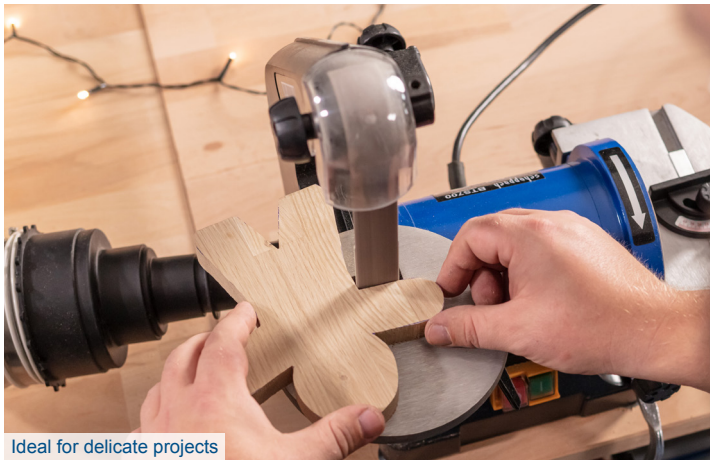

Ideal for delicate projects



Easy belt configuration using rotary knob



Swivelling support table



Variable cross stop

HIGHLY VERSATILE 2IN1



Large 125 mm sanding disc allows quick sanding of components.



The 25.4 mm wide belt perfectly finishes narrow areas.

04/2026 Technical modifications and errors reserved.

Solid metal construction



860 rpm



scheppach Germany

BELT AND DISC SANDER

BTS800

Click here for optional accessories



360°

Sieger Preis-Leistung GUT (1,6)
Scheppach Bandschleifer und Tellerschleifer bts 800
Im Vergleich: Tellerschleifer
Vergleich.org

PRODUCT DATA

Dimensions L x W x H	470 x 365 x 295 mm
Mains voltage	230 – 240 V~ / 50 Hz
Power	370 W
Grinding wheel	
Grinding wheel Ø	150 mm
Grinding wheel speed	2980 rpm
Table tilt	0° – 45°
Grinding belt	
Grinding belt length/width	762 / 25.4 mm
Belt speed	450 m/min
Housing material	Solid cast material construction

LOGISTICAL DATA

Weight net / gross	16.5 / 17.5 kg
Packaging dimensions	560 x 275 x 320 mm
Item number	4903302901
EAN	4014915082095
20 containers	560 pcs.
40 containers	1120 pcs.
40 HQ containers	1344 pcs.

Grinding wheel 150 mm diameter



Grinding belt length 915 x 100 mm



Grinding wheel with Velcro



Extraction option on the unit of 63 mm



Support table 0° to 45°



Grinding belt can be adjusted for horizontal or vertical use



AREAS OF APPLICATION



Softwood



Hardwood



Thanks to the special design, even large areas can be processed easily and effectively.



The grinding belt can be adjusted both horizontally and vertically, thereby expanding the range of applications.




Grinding wheel with Velcro fastening.



Horizontal and vertical grinding belt



Grinding belt can be adjusted for horizontal or vertical use.

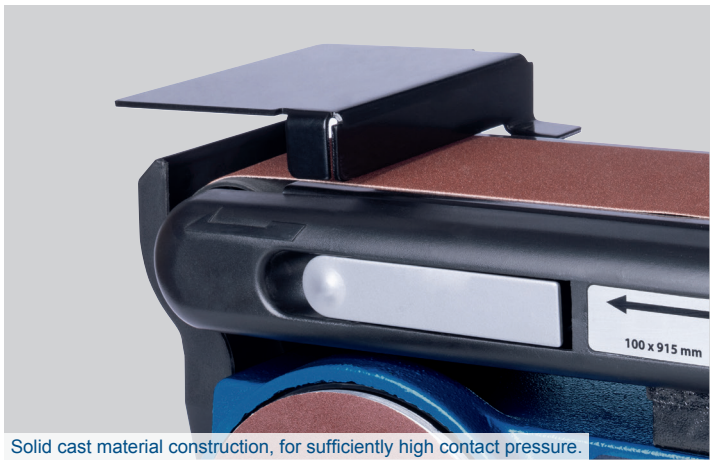

Solid cast material construction, for sufficiently high contact pressure.

04/2026 Technical modifications and errors reserved.

Compact dimensions
470 x 365 x 295 mm


Solid
metal construction

scheppach
Germany

BELT AND DISC SANDER

BTS900

Click here for optional accessories

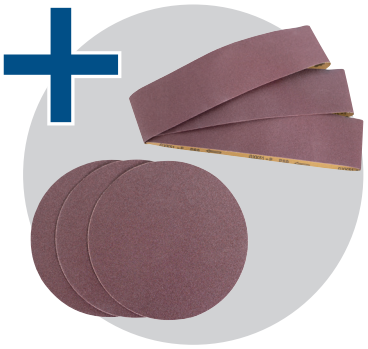



360°

Scheppach bts900

Premium Class 1,4
Heimwerker Praxis 2/22
Value for money: Very good

Best Buy
Heimwerker Praxis 2/22

PRODUCT DATA

Dimensions L x W x H	475 x 375 x 295 mm
Mains voltage	230 – 240 V~ / 50 Hz
Power	370 W
Grinding wheel	
Grinding wheel Ø	150 mm
Grinding wheel speed	2980 rpm
Table tilt	0° – 45°
Grinding belt	
Grinding belt length/width	915 x 100 mm
Belt speed	450 m/min
Housing material	Solid cast material construction

LOGISTICAL DATA

Weight net / gross	15.5 / 16.5 kg
Packaging dimensions	565 x 325 x 345 mm
Item number	5903306901
EAN	4046664068396
20 containers	560 pcs.
40 containers	1120 pcs.
40 HQ containers	1344 pcs.

Grinding wheel 150 mm diameter



Grinding belt length 915 x 100 mm



Grinding wheel with Velcro



Extraction option on the unit of 63 mm



Support table 0° to 45°



Grinding belt can be adjusted for horizontal or vertical use



AREAS OF APPLICATION



Softwood



Hardwood



The support table can be mounted on the disc grinding device and on the belt grinding fixture



Even curves can be ground without problems.



Horizontal and vertical grinding belt



Grinding wheel with Velcro fastening.



Swivelling support table

04/2026 Technical modifications and errors reserved.

Compact dimensions
470 x 365 x 295 mm

Solid
metal construction

scheppach
Germany

OSCILLATING SPINDLE GRINDING MACHINE

OSM100





Click here for optional accessories

360°

PRODUCT DATA

Dimensions L x W x H	400 x 345 x 455 mm
Mains voltage	230 – 240 V~ / 50 Hz
Power	450 W
Grinding spindle	
Spindle Ø	12.7 mm
Oscillation frequency	58 rpm
Oscillation stroke	16 mm
Max. grinding height	98 mm
Table size	320 x 300 mm

LOGISTICAL DATA

Weight net / gross	9 / 11 kg
Packaging dimensions	460 x 410 x 385 mm
Item number	5903408901
EAN	4046664246343
20 containers	418 pcs.
40 containers	868 pcs.
40 HQ containers	870 pcs.

Abrasive sleeve set K80 Ø 13 / 19 / 26 / 38 / 51 / 76 mm




Table inlay set Ø 18 / 25 / 32 / 44 / 57 / 82 mm

Aluminium die-cast table 320 x 300 mm



Oscillation stroke 16 mm



Spindle diameter 12.7 mm



Max. grinding height 98 mm



UNIVERSAL APPLICATION



Internal contours



External contours



Integrated dust extraction nozzle for connection to a chip extraction system.



Different diameters of sleeves enable precise grinding results



04/2026 Technical modifications and errors reserved.

Compact design

Dust extraction outer Ø 39 mm

INCLUDING


- 6 grinding sleeves with diameters of 13, 19, 26, 38, 51 and 76 mm
- matching rubber rollers and 6 table inlays

scheppach Germany

OSCILLATING SPINDLE GRINDING MACHINE

OSM600



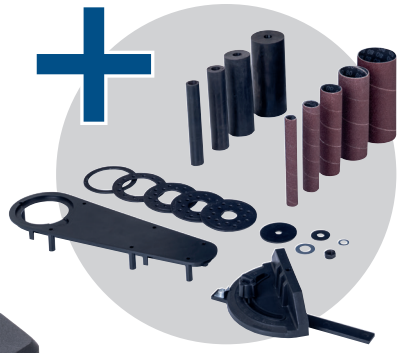

Click here for optional accessories

360°

PRODUCT DATA

Dimensions L x W x H	465 x 435 x 470 mm
Mains voltage	230 – 240 V~ / 50 Hz
Power	450 W
Grinding spindle	
Spindle Ø	12.7 mm
Oscillation frequency	58 rpm
Oscillation stroke	16 mm
Max. grinding height	98 mm
Grinding belt	
Belt speed	8 m/sec
Grinding belt length/width	610 x 100 mm
Table size	320 x 300 mm
Table tilt	0 - 45°

LOGISTICAL DATA

Weight net / gross	13.7 / 15.6 kg
Packaging dimensions	520 x 465 x 400 mm
Item number	5903409901
EAN	4046664246350
20 containers	275 pcs.
40 containers	575 pcs.
40 HQ containers	684 pcs.

Spindle set K80 Ø 13 / 19 / 26 / 38 / 51 mm




Table inlay set Ø 20 / 25 / 33 / 44 / 57 mm

Aluminium die-cast table 400 x 407 mm



Oscillation stroke 16 mm



Spindle diameter 12 mm



Max. grinding height 90 mm



AREAS OF APPLICATION



Contour sanding



Angle sanding



Surface grinding



Integrated dust extraction nozzle for connection to a chip extraction system.



Practical storage option for accessories and assembly tools.



Swivelling work table with locking positions at 15°, 22.5°, 30° and 45°



04/2026 Technical modifications and errors reserved.

Compact design

INCLUDING

- **5 grinding sleeves with diameters of 13, 19, 26, 38 and 51 mm**
- **Suitable rubber rollers, table inlays and a grinding belt**
- **Mitre gauge**

scheppach Germany

UNIVERSAL SANDING AND GRINDING TOOL

MRS500


Click here for optional accessories



PRODUCT DATA	
Dimensions L x W x H	410 × 135 × 135 mm
Mains voltage	230–240 V~ / 50 Hz
Power	300 W
Speed	1600–3000 rpm
Brush diameter	60 mm
Brush width	10 / 60 mm
Soft start	No
Cable length	1.9 m

LOGISTICAL DATA	
Weight net / gross	1.8 / 2.6 kg
Packaging dimensions	500 x 160 x 140 mm
Item number	5903822901
EAN	4046664233572
20 containers	3300 pcs.
40 containers	6420 pcs.
40 HQ containers	7980 pcs.


10 mm or 60 mm brush width



One device, countless possibilities



300 W



Variable speed 1600 – 3000 rpm



Auto-lock system



Soft-grip handle



APPLICATION EXAMPLES



Sanding



Rust removal



Two handles for comfortable operation



Variable speed 1600 – 3000 rpm



Auto-lock system for quick and easy grinding sleeve replacement



Powerful 300-watt motor



04/2026 Technical modifications and errors reserved.

INCLUDING


- Brush with abrasive flaps – 60 mm
- Flexible sanding brush – 60 mm
- Brush with abrasive flaps – 10 mm

scheppach Germany

UNIVERSAL SANDING AND GRINDING TOOL

MRS1300

Click here for optional accessories

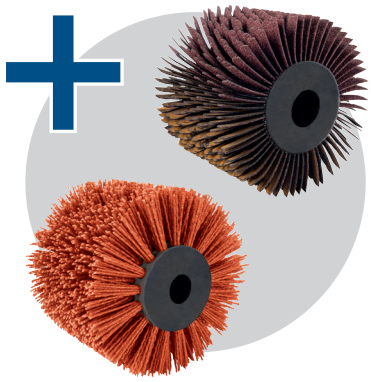



Scheppach MRS1300
WORLD TOOL AWARDS
WINNER
PREMIUM
2023

Scheppach Universal-Renovierungsschleifer MRS1300
Entry Level 1,5
Fußböden und Wände
Heimwerker Praxis 2022
Value for money: good – very good

Best Of 2024
Heimwerker Praxis 1/24
Scheppach universal sanding and grinding tool MRS1300
Category: Electric tools

PRODUCT DATA	
Dimensions L x W x H	460 x 205 x 140 mm
Mains voltage	220 – 240 V~ / 50/60 Hz
Power	1300 W
Speed	1600–3000 rpm
Brush diameter	120 mm
Brush width	100 mm
Soft start	Yes
Cable length	1.9 m

LOGISTICAL DATA	
Weight net / gross	5.4 / 6.5 kg
Packaging dimensions	470 x 210 x 140 mm
Item number	5903819904
EAN	4046664231646
20 containers	1600 pcs.
40 containers	3100 pcs.
40 HQ containers	3760 pcs.

100 mm width / 120 mm diameter

SOFT START

1300 W

Variable speed 900 – 3,200 rpm

Power pack

Robust

APPLICATION EXAMPLES



Sanding



Satin finish



Polishing



Rust removal



Brightening



Clean



Two handles for comfortable operation



Extraction option for working in low-dust conditions



Variable speed 900 – 3,200 rpm



Soft start function protects the motor



Includes brass wire brush for wood, metal and stone work.



Two handles for comfortable use and secure guidance.

04/2026 Technical modifications and errors reserved.

INCLUDING

- Brass wire brush
- Nylon brush
- Sanding strip brush

scheppach Germany

DRILL BIT SHARPENER

DBS800



360°

PRODUCT DATA	
Dimensions L x W x H	220 x 180 x 160 mm
Mains voltage	230 – 240 V~ / 50 Hz
Power	80 W
Grinding disc Ø	79 mm
Grinding wheel material	Diamond grinding wheel
Drill bit Ø	3 - 13 mm
Speed	4200 rpm

LOGISTICAL DATA	
Weight net / gross	2.7 / 3.1 kg
Packaging dimensions	230 x 190 x 165 mm
Item number	5903404901
EAN	4046664063957
20 containers	3072 pcs.
40 containers	6140 pcs.
40 HQ containers	7456 pcs.

LONG LIFE

Diamond grinding wheel

High-quality copper coil

80 W

Particularly space-saving design

4200 rpm

THREE SIMPLE STEPS TO A SHARP DRILL BIT



1. Pre-setting



2. Sharpen



3. Thinning



80 W motor provides sufficient power for all applications.



The main cutting edges of the drill bit are evenly ground and thinned after grinding. This results in lower frictional forces during drilling and the drill bit is more effectively centred in the workpiece.



Suitable for metal drill bits in the most common sizes.



Sharpen blunt drill bits in 3 easy steps.

04/2026 Technical modifications and errors reserved.

scheppach Germany

UNIVERSAL 3IN1 WALL, FLOOR AND CEILING PROCESSING SYSTEM

BFR1200



Click here for optional accessories

PRODUCT DATA	
Dimensions L x W x H	370 x 210 x 170 mm
Mains voltage	230 V~ / 50 Hz
Power	1050 W
Speed	410 – 1900 rpm
Grinding wheel Ø	180 mm
Grinding attachment	Round
Telescopic function	No
LED	No
Cable length	5 m

LOGISTICAL DATA	
Weight net / gross	4 / 5 kg
Packaging dimensions	380 x 220 x 190 mm
Item number	5903825901
EAN	4046664249337
20 containers	1640 pcs.
40 containers	3400 pcs.
40 HQ containers	3980 pcs.

Diameter 180 mm



Velcro fastener



Soft-grip



410 – 1900 rpm



Adjustable handle



Lightweight



APPLICATION EXAMPLES



Drywall



Adhesive residue



Filler



The adjustable handle can be adapted to any application.



The carbide cup wheel ensures a particularly high level of material is removed.



Thanks to variable speed control, a wide variety of materials can be machined.



You can work close to edges, thanks to removable cover – perfect for use in transitional areas between wall and floor.

04/2026 Technical modifications and errors reserved.

INCLUDING

- Dust bag
- Installation spanner
- Dust hose
- Suction adapter
- Carbide cup wheel
- 6x grinding discs

scheppach Germany

WALL AND CEILING SANDER

DS920

Click here for optional accessories



PRODUCT DATA

Dimensions L x W x H	1450 - 1700 x 270 x 300 mm
Mains voltage	230 – 240 V~
Power	710 W
Speed	800 – 1800 rpm
Grinding wheel Ø	215 mm
Grinding attachment	Round
Telescopic function	Steplessly extendable
LED	Yes
Cable length	4 m

LOGISTICAL DATA

Weight net / gross	3.8 / 6.38 kg
Packaging dimensions	720 x 290 x 265 mm
Item number	5903804901
EAN	4046664037514
20 containers	570 pcs.
40 containers	1170 pcs.
40 HQ containers	1300 pcs.


Diameter 215 mm

Velcro fastener


LED work light

Steplessly extendable

APPLICATION EXAMPLES

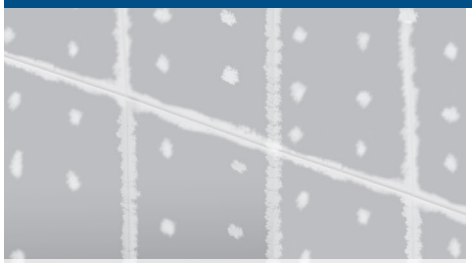

Drywall

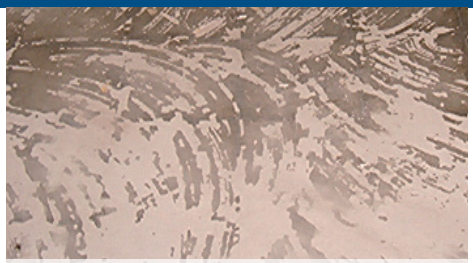

Adhesive residue



Filler



Easy overhead sanding thanks to the 0°–90° tiltable grinding head.



Rapid work progress thanks to powerful 710 W motor.



The lamp provides the perfect view even in poor lighting conditions.

04/2026 Technical modifications and errors reserved.

INCLUDING


- 6x sandpapers

scheppach Germany

WALL AND CEILING SANDER

DS930

Click here for optional accessories

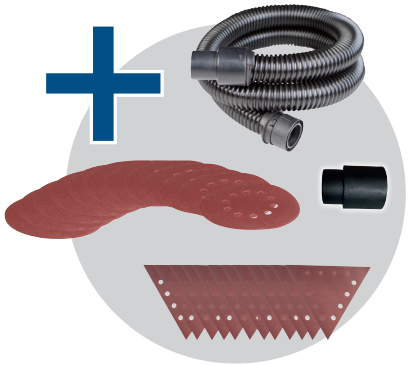



PRODUCT DATA

Dimensions L x W x H	1400 – 1650 x 250 x 240 mm
Mains voltage	230 – 240 V~
Power	710 W
Speed	1200 – 2500 rpm 3500 – 7500 rpm
Grinding wheel Ø	Ø 215 mm / 282 x 282 x 282 mm
Grinding attachment	Round, triangular
Telescopic function	steplessly extendable
LED	No
Cable length	4 m

LOGISTICAL DATA

Weight net / gross	4.5 / 8.9 kg
Packaging dimensions	735 x 286 x 265 mm
Item number	5903805901
EAN	4046664044550
20 containers	495 pcs.
40 containers	1020 pcs.
40 HQ containers	1279 pcs.

215 mm



Velcro fastener



LED



steplessly extendable
1,400 – 1,650 mm



282 x 282 x 282 mm



APPLICATION EXAMPLES



Drywall



Adhesive residue



Filler



The abrasive paper can be quickly replaced, thanks to Velcro fastener.



Two grinding attachments - perfect for surface grinding and machining corners.



The telescopic function also makes it easy and effective to work on ceilings.



Thanks to the triangular sanding head, even hard-to-reach areas can be ground.

04/2026 Technical modifications and errors reserved.

INCLUDING

- 4 m suction hose
- 2 suction adapters
- 12 round and triangular grinding discs

scheppach Germany

WALL CHASER

MNF2250



PRODUCT DATA

Dimensions L x W x H	465 x 211 x 151 mm
Mains voltage	220 – 240 V~ / 50 Hz
Power	2250 W
Cutting wheel Ø	125 mm
Idle speed	5400 rpm
Groove width	8 - 40 mm
Groove depth	0 - 40 mm
Soft start	Yes

LOGISTICAL DATA

Weight net / gross	5.5 / 7.2 kg
Packaging dimensions	520 x 288 x 182 mm
Item number	5902602901
EAN	4046664233558
20 containers	960 pcs.
40 containers	2088 pcs.
40 HQ containers	2396 pcs.

2250 W

Ø 125 mm

8 - 40 mm

0 - 40 mm

Overload protection

SOFT START



Stepless and tool-free milling depth adjustment from 0 to max. 40 mm thanks to double gearbox.



Additional guide wheels on the sides allow precise guidance of the machine.



Ergonomic handling thanks to soft-grip surface.



Easy cutting wheel replacement, thanks to spindle lock.




Double gearbox with die-cast aluminium housing.



Adaptable cutting width adjustment with up to 4 cutting wheels for narrow and wide chases from 8 to 40 mm.

INSTALLATION GROOVES IN

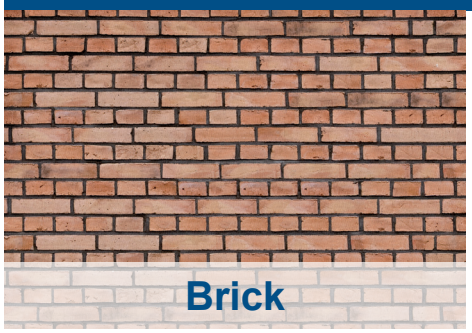

Brick



Concrete



Plaster

04/2026 Technical modifications and errors reserved.

INCLUDING

- 4 diamond cutting wheels, Ø 125 mm
- Transport case

scheppach Germany

4 T LOG SPLITTER

HL460



PRODUCT DATA

Dimensions L x W x H	995 x 425 x 610 mm
Engine	230 V~ / 50 Hz
Power	1500 W
Max. splitting force	4 t
Max. diameter of material to be split	50 - 250 mm
Max. length of split material	130 - 370 mm
Cylinder stroke	290 mm
Oil quantity	2.4 L
Forward speed	3.86 cm/s
Return speed	6.44 cm/s
Machine stand	No

LOGISTICAL DATA

Weight net / gross	45 / 48.5 kg
Packaging dimensions	790 x 325 x 510 mm
Item number	5905209901
EAN	4046664071440
20 containers	196 pcs.
40 containers	420 pcs.
40 HQ containers	525 pcs.

max. 4 t



50 - 250 mm




130 - 370 mm



1500 W



Adjustable splitting system



Compact design




APPLICATION EXAMPLES



Hardwood



Softwood

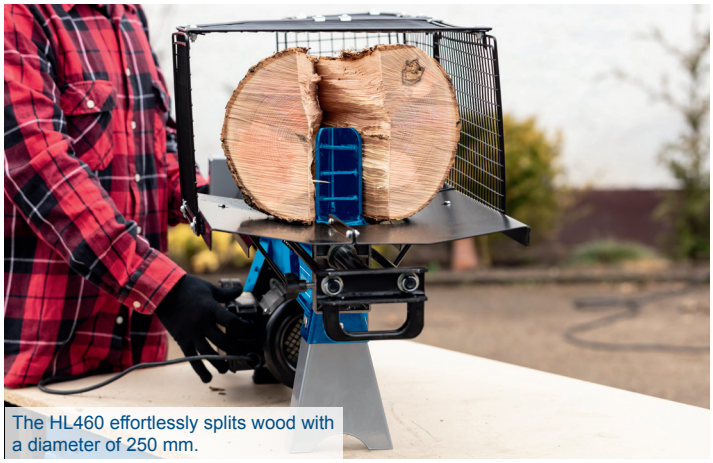

The HL460 effortlessly splits wood with a diameter of 250 mm.



Sturdy splitting blade.



The two-hand safety control and the on/off switch enable safe and effective working.



Safety cover in the splitting area.



The steplessly adjustable splitting stroke ensures efficient working.

04/2026 Technical modifications and errors reserved.

7 T LOG SPLITTER

HL760L
HL760LS

Click here for optional accessories



PRODUCT DATA

Dimensions L x W x H	1160 x 425 x 610 mm (HL760L) 1160 x 725 x 1350 mm (HL760LS)
Engine	220 – 240 V~ / 50 Hz
Power	2200 W
Max. splitting force	7 t
Max. diameter of material to be split	50 - 250 mm
Max. length of split material	200 - 520 mm
Cylinder stroke	360 mm
Oil quantity	3.5 L
Forward speed	3.08 cm/s
Return speed	5.29 cm/s
Machine stand	No (HL760L) / Yes (HL760LS)

Also available with base frame (HL760LS)

LOGISTICAL DATA

	HL760L	HL760LS
Weight net / gross	59 / 63 kg	57 / 60 kg
Packaging dimensions	950 x 325 x 510 mm	950 x 325 x 510 mm
Item number	5905211903	5905211934
EAN	4046664121787	4046664120698
20 containers	168 pcs.	
40 containers	344 pcs.	
40 HQ containers	430 pcs.	

max. 7 t

50 - 250 mm

200 - 520 mm

2200 W

Adjustable splitting system

Compact design

APPLICATION EXAMPLES



Hardwood



Softwood



The HL760LS / HL760L effortlessly splits wood up to a diameter of 250 mm.



Sturdy splitting blade.



The two-hand safety control and the on/off switch enable safe and effective working.



Safety cover in the splitting area.



The steplessly adjustable splitting stroke ensures efficient working.

04/2026 Technical modifications and errors reserved.

INCLUDING

- **Base frame (HL760LS)**

scheppach Germany

7 T LOG SPLITTER

HL730



PRODUCT DATA

	230 V~	400 V~
Dimensions L x W x H	850 x 915 x 1495 mm	
Engine	230 V~ / 50 Hz	400 V~ / 50 Hz
Power	3000 W	2100 W
Max. splitting force	7 t	
Max. diameter of material to be split	100 - 300 mm	
Max. length of split material	250 - 550 mm	
Cylinder stroke	495 mm	
Oil quantity	3.5 L	
Forward speed	3.6 cm/s	
Return speed	16.5 cm/s	

LOGISTICAL DATA

	230 V~	400 V~
Weight net / gross	98.2 / 103.5 kg	97.5 / 102.5 kg
Packaging dimensions	550 x 345 x 1035 mm 550 x 345 x 1150 mm (with pallet)	
Item number	5905309901	5905309902
EAN	4046664071471	4046664071501
20 containers	124 pcs.	
40 containers	256 pcs.	
40 HQ containers	256 pcs.	

max. 7 t

100 - 300 mm

250 - 550 mm

3000W / 2100W

Adjustable splitting system

Compact design

APPLICATION EXAMPLES



Hardwood



Softwood



The HL730 effortlessly splits wood with a diameter of 300 mm.



The two-hand safety control and the on/off switch enable safe and effective working.



Double-sided split material storage.



Warp-resistant, powder-coated steel structure.

04/2026 Technical modifications and errors reserved.

8 T LOG SPLITTER

HL810



PRODUCT DATA

	230 V~	400 V~
Dimensions L x W x H	845 x 935 x 1500 mm	
Engine	230 V~ / 50 Hz	400 V~ / 50 Hz
Power	3000 W	3500 W
Max. splitting force	8 t	
Max. diameter of material to be split	80 - 300 mm	
Max. length of split material	100 - 550 mm	
Cylinder stroke	550 mm	
Oil quantity	4 L	
Forward speed	3.1 cm/s	
Return speed	17.3 cm/s	

LOGISTICAL DATA

	230 V~	400 V~
Weight net / gross	109.9 / 117 kg	108.8 / 115.9 kg
Packaging dimensions	560 x 400 x 1040 mm 560 x 400 x 1150 mm (with pallet)	
Item number	5905310901	5905310902
EAN	4046664071488	4046664071495
20 containers	112 pcs.	
40 containers	228 pcs.	
40 HQ containers	228 pcs.	

max. 8 t

80 - 300 mm

100 - 550 mm

3000W / 3500W

Adjustable splitting system

Compact design

APPLICATION EXAMPLES




Hardwood



Softwood



The HL810 effortlessly splits wood with a diameter of 300 mm.

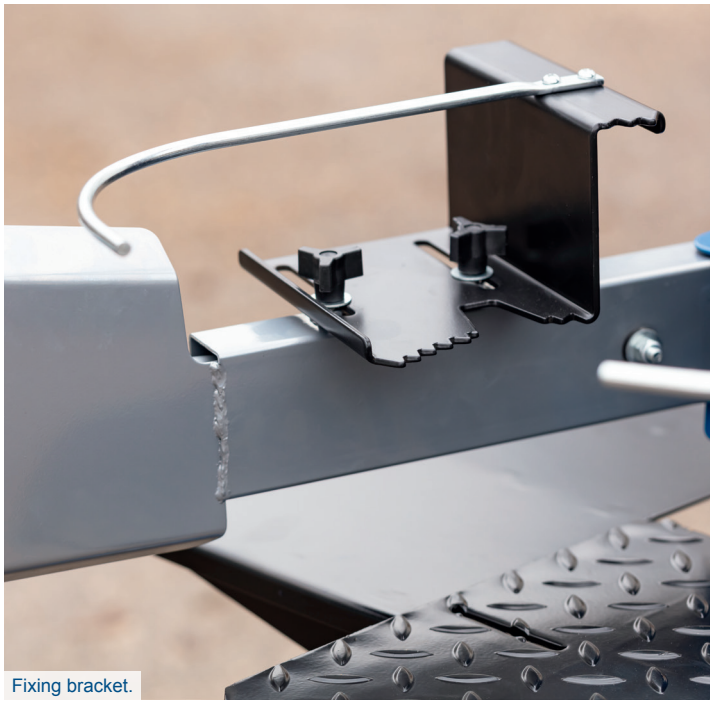

Fixing bracket.



The two-hand safety control and the on/off switch enable safe and effective working.



Warp-resistant, powder-coated steel structure.

04/2026 Technical modifications and errors reserved.

7.95 T METRE LOG SPLITTER

COMPACT 8T



PRODUCT DATA

	230 V~	400 V~
Dimensions L x W x H	850 x 900 x 990/1465 mm	
Engine	230 V~ / 50 Hz	400 V~ / 50 Hz
Power	3150 W	3500 W
Max. splitting force	7.95 t	
Max. diameter of material to be split	80 - 350 mm	
Max. length of split material	680 - 1070 mm	
Cylinder stroke	485 mm	
Oil quantity	4.8 L	
Forward speed	3.2 cm/s	5.5 cm/s
Return speed	16 cm/s	17 cm/s
Base plate dimensions	366 x 356 x 50 mm	
Catching bars	Yes	
Trunk lifter	No	
Stock size	850 x 900 x 990 mm	

LOGISTICAL DATA

	230 V~	400 V~
Weight net / gross	125 kg / 135.5 kg	126 kg / 137.5 kg
Item number	5905419901	5905419902
EAN	4046664128526	4046664123293
20 containers	78 pcs.	
40 containers	168 pcs.	
40 HQ containers	162 pcs.	

max. 7.95 t

80 - 350 mm

680 - 1070 mm

3150 W W / 3500 W

Adjustable splitting system

Compact design

APPLICATION EXAMPLES



Hardwood



Softwood



Europe's only metre splitter under 8 t.



Patented splitting technology.



Wide range of uses because work table can be swivelled.



Height of only 990 mm in storage position.



Double-sided catch bars for split material.



Two large transport wheels.

04/2026 Technical modifications and errors reserved.

10 T METRE LOG SPLITTER

COMPACT 10T



PRODUCT DATA

	230 V~	400 V~
Dimensions L x W x H	830 x 930 x 1020/1500 mm	
Engine	230 V~ / 50 Hz	400 V~ / 50 Hz
Power	3150 W	3500 W
Max. splitting force	10 t	
Max. diameter of material to be split	80 - 380 mm	
Max. length of split material	750 - 1070 mm	
Cylinder stroke	485 mm	
Oil quantity	4.8 L	
Forward speed	3 cm/s	5.5 cm/s
Return speed	14 cm/s	15.4 cm/s
Base plate dimensions	321 x 353 x 70 mm	
Catching bars	Yes	
Trunk lifter	Yes	
Stock size	830 x 930 x 1020 mm	

LOGISTICAL DATA

	230 V~	400 V~
Item number	5905423901	5905419902
EAN	4046664157717	4046664147015
40 HQ containers	162 pcs.	

max. 10 t

80 - 380 mm

750 - 1070 mm

3150W / 3500W

Adjustable splitting system

Compact design

APPLICATION EXAMPLES



Hardwood



Softwood



Compact design – machine height of only 1020 mm when retracted.



Stop lever for easy adjustment of the bearing position.



Sturdy construction.



Working at different heights possible because table can be swivelled.



Effortless work thanks to trunk lifter.



Easy transport thanks to 2 large wheels.

04/2026 Technical modifications and errors reserved.

15 T METRE LOG SPLITTER

COMPACT 15T



PRODUCT DATA

Dimensions L x W x H	1160 x 960 x 1080/1630 mm
Engine	400 V~ / 50 Hz
Power	3500 W
Max. splitting force	15 t
Max. diameter of material to be split	120 - 450 mm
Max. length of split material	750 - 1070 mm
Cylinder stroke	550 mm
Oil quantity	7 L
Forward speed	3.8 cm/s
Return speed	12.8 cm/s
Base plate dimensions	321 x 353 x 70 mm
Catching bars	Yes
Trunk lifter	Yes
Stock size	1160 x 960 x 1080 mm

LOGISTICAL DATA

Weight net / gross	185.5 / 197.8 kg
Item number	5905422902
EAN	4046664123323
40 HQ containers	129 pcs.

max. 15 t

120 - 450 mm

750 - 1070 mm

3500 W

Adjustable splitting system

Compact design

APPLICATION EXAMPLES



Hardwood



Softwood



Splits hard and soft wood up to 1070 mm in length effortlessly and reliably.



Tilt protection for perfect support.



Stop lever for easy adjustment of the bearing position.



Wide range of uses because work table can be swivelled.



Effortless work thanks to trunk lifter.



Thanks to the compact design, the unit is both space-saving and easy to transport.

04/2026 Technical modifications and errors reserved.

25 T METRE LOG SPLITTER

HL2550GM



PRODUCT DATA

	400 V~	Cardan shaft drive
Dimensions L x W x H	1050 x 1700 x 2500 mm	
Engine	400 V~ / 50 Hz	400 V~ / 50 Hz
Power	5100 W	3500 W
Max. splitting force	25 t	
Max. diameter of material to be split	80 - 350 mm	
Max. length of split material	560 - 1100 mm	
Cylinder stroke	948 mm	
Oil quantity	24 L	
Forward speed	10.5 / 4.3 cm/s	13.1 / 5.3 cm/s
Return speed	7.5 cm/s	9.3 cm/s
Base plate dimensions	660 x 540 mm	
Catching bars	Yes	
Trunk lifter	Yes	
Stock size	2000 mm	

LOGISTICAL DATA

Weight net / gross	319 / 320 kg
Packaging dimensions	940 x 680 x 1900 mm (with pallet)
Item number	5905509917
EAN	4046664111856
20 containers	20 pcs.
40 containers	42 pcs.
40 HQ containers	42 pcs.

max. 25 t

80 - 350 mm

560 - 1100 mm

3150W / 3500W

Adjustable splitting system

Robust design

APPLICATION EXAMPLES



Hardwood



Softwood



Using the log fixing device, the log can be secured before the splitting process without having to hold it.



The two-hand safety operation, the on/off switch and the log catching bars on both sides allow safe and effective working.



Thanks to the trunk lifter, work can be carried out in an ergonomic manner that conserves energy.



Effortless splitting of softwood and hardwood.

2 DRIVE TYPES



Cardan shaft



induction motor

04/2026 Technical modifications and errors reserved.

30 T METRE LOG SPLITTER

HL3000GM



PRODUCT DATA

	400 V~	Cardan shaft drive
Dimensions L x W x H	1540 x 1140 x 2520 mm	
Engine	400 V~ / 50 Hz	400 V~ / 50 Hz
Power	5500 W	5500 W
Max. splitting force	30 t	
Max. diameter of material to be split	100 - 400 mm	
Max. length of split material	560 - 1100 mm	
Cylinder stroke	948 mm	
Oil quantity	30 L	
Forward speed	12.5 / 3.7 cm/s	21.5 / 5.7 cm/s
Return speed	6.7 cm/s	10.4 cm/s
Base plate dimensions	660 x 540 mm	
Catching bars	Yes	
Trunk lifter	Yes	
Stock size	2000 mm	

LOGISTICAL DATA

Weight net / gross	373.1 / 386.1 kg
Packaging dimensions	970 x 680 x 2000 mm
Item number	5905510902
EAN	4046664072058
20 containers	20 pcs.
40 containers	41 pcs.
40 HQ containers	41 pcs.

max. 30 t

100 - 400 mm

560 - 1100 mm

5500 W

Adjustable splitting system

Robust design

APPLICATION EXAMPLES



Hardwood



Softwood



Using the log fixing device, the log can be secured before the splitting process without having to hold it.



The two-hand safety operation, the on/off switch and the log catching bars on both sides allow safe and effective working.



Thanks to the trunk lifter, work can be carried out in an ergonomic manner that conserves energy.



Effortless splitting of softwood and hardwood.

2 DRIVE TYPES




Cardan shaft



induction motor

04/2026 Technical modifications and errors reserved.

KINDLING SPLITTER

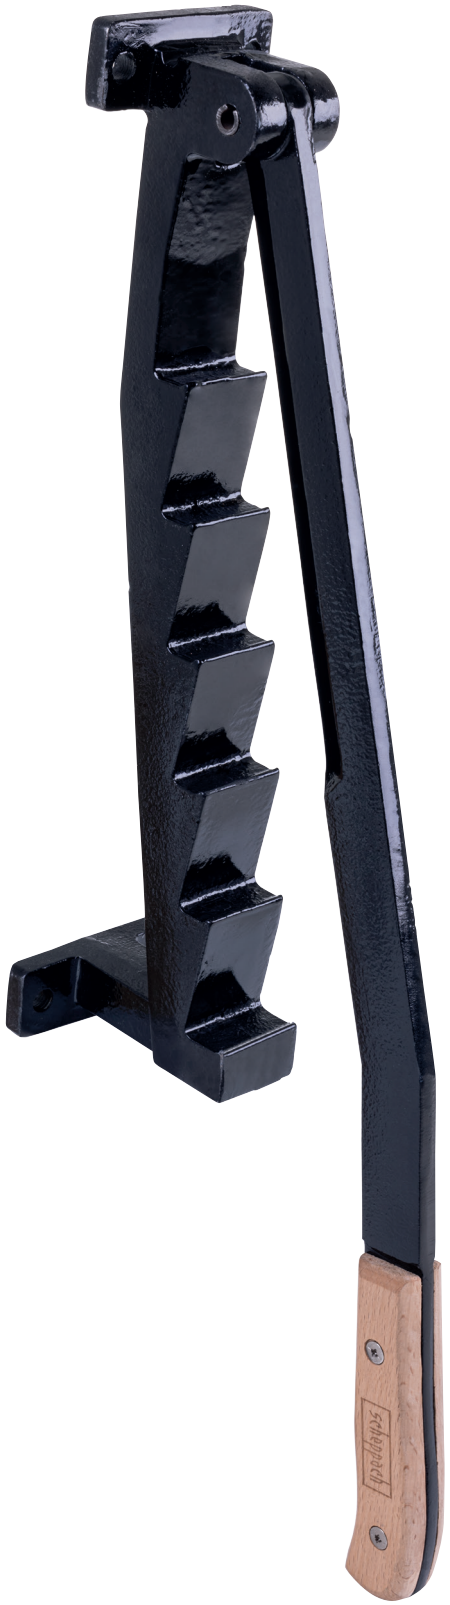

PRODUCT DATA

Dimensions L x W x H	135 x 85 x 590 mm
Blade length	220 mm
Split material grades	6 pcs.
Lever length	560 mm
Material	Robust cast iron construction

LOGISTICAL DATA

Weight net / gross	4.5 / 4.8 kg
Packaging dimensions	615 x 150 x 95 mm
Item number	7905907001
EAN	4046664042686
20 containers	2016 pcs.
40 containers	4032 pcs.
40 HQ containers	4032 pcs.

220 mm



90 - 340 mm



Safe handling



Easy attachment



Compact design



Robust design



APPLICATION EXAMPLES



Hardwood



Softwood



Ideal for kindling and firelighters.



High level of safety, thanks to constant control during the splitting process.



The ergonomic wooden handle and the lever length of 560 mm ensure effortless splitting of kindling wood.



Wall mounting for an optimal ergonomic working height.

04/2026 Technical modifications and errors reserved.

405 MM ROCKING LOG SAW

HS410



Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	1002 x 737 x 1046 mm
Mains voltage	230 V~
Power	2200 W
Saw blade specification	405 mm
Saw blade speed	2800 rpm
Max. cut Ø	140 mm
Max. cutting length	300 - 1000 mm
Swivel frame support	505 - 755 mm
Swivel frame extension	Yes
Saw stop	Yes


LOGISTICAL DATA

Weight net / gross	39 / 43 kg
Packaging dimensions	1075 x 776 x 247 mm
Item number	5905114901
EAN	4046664071662
20 containers	150 pcs.
40 containers	320 pcs.
40 HQ containers	363 pcs.

230 V~ | 2200 W | 405 mm | 2800 rpm | 140 mm | 300 - 1000 mm



The attached stop is used to specify the cutting length.

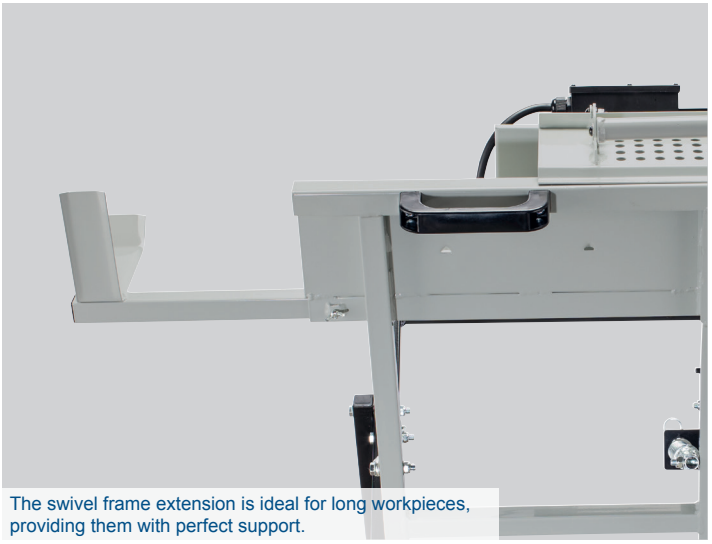

The swivel frame extension is ideal for long workpieces, providing them with perfect support.



The patented protection cover allows safe and comfortable working with the HS410.



Both softwood and hardwood can be processed perfectly using the HS410.

04/2026 Technical modifications and errors reserved.

505 MM ROCKING LOG SAW

HS550



Click here for optional accessories

PRODUCT DATA

	230 V~	400 V~
Dimensions L x W x H	887 x 1114 x 1120 mm	
Mains voltage	230 V~	400 V
Power	3000 W	3000 W
Saw blade specifications	505 mm	
Saw blade speed	2800 rpm	
Max. cut Ø	30 - 170 mm	
Max. cutting length	300 - 1000 mm	
Swivel frame support	740 mm	
Swivel frame extension	Yes	
Saw stop	No	

LOGISTICAL DATA

	230 V~	400 V~
Weight net / gross	69.5 / 89.5 kg	
Packaging dimensions	805 x 760 x 1005 mm	
Item number	5905110901	5905110902
EAN	4046664241065	4046664242772
20 containers	20 pcs.	
40 containers	42 pcs.	
40 HQ containers	84 pcs.	

230 V~ / 400 V

3000 W

505 mm

2800 rpm

30 - 170 mm


300 - 1000 mm




230 V~




400 V

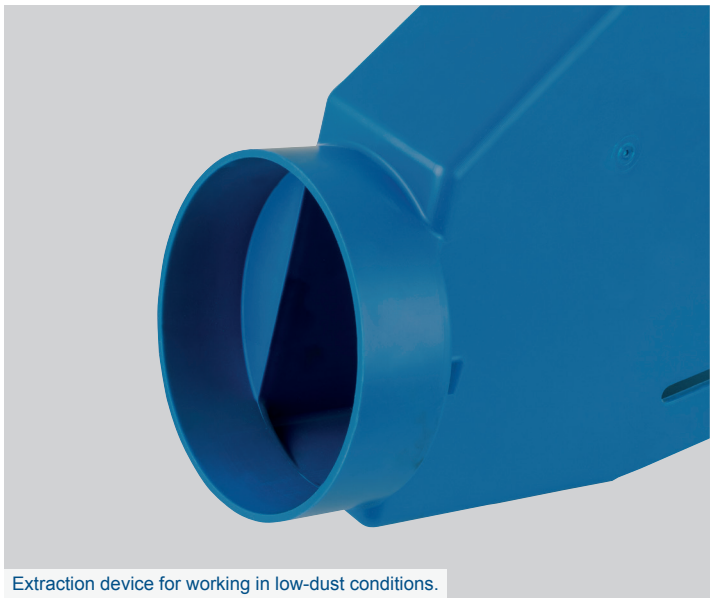

Extraction device for working in low-dust conditions.

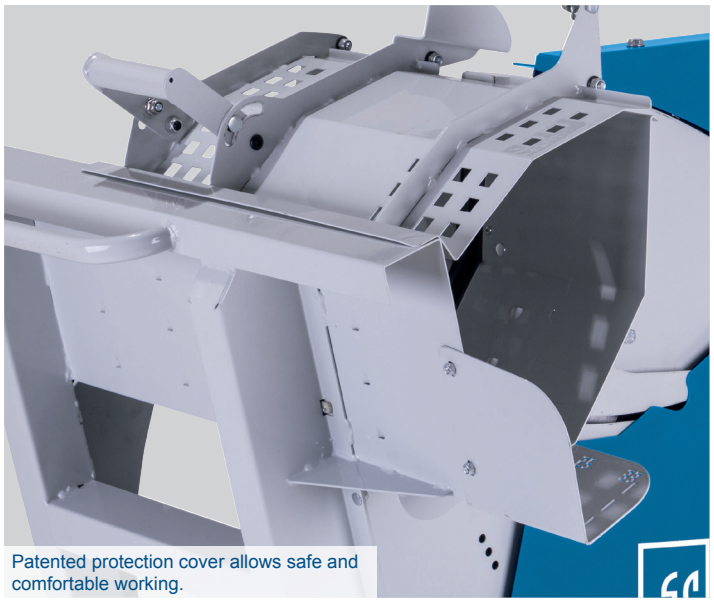

Patented protection cover allows safe and comfortable working.

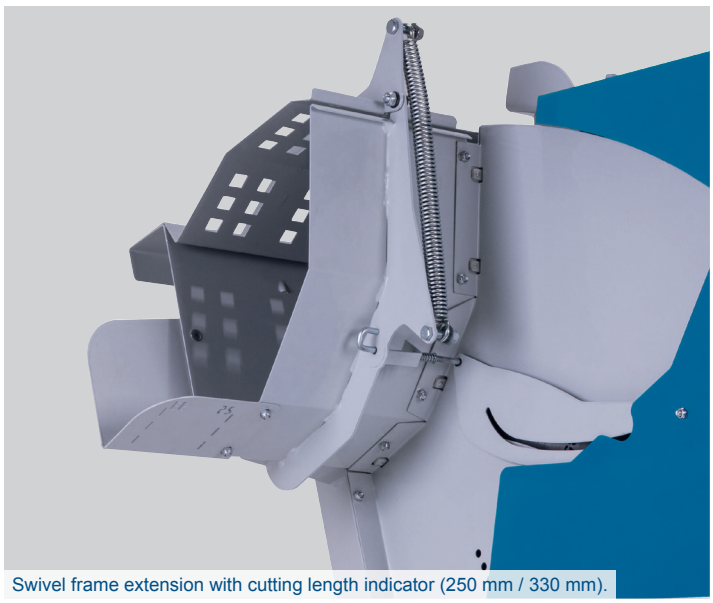

Swivel frame extension with cutting length indicator (250 mm / 330 mm).



Space-saving storage thanks to rocker lock.

04/2026 Technical modifications and errors reserved.

700 MM ROCKING LOG SAW

HS720



PZ.LSV GS geprüfte Sicherheit

Click here for optional accessories

PRODUCT DATA

	230 V~	400 V~
Dimensions L x W x H	1270 x 730 x 1130 mm	
Mains voltage	230 V~ / 50 Hz	380 – 420 V / 50 Hz
Power	3000 W	4500 W
Saw blade specifications	700 mm	
Saw blade speed	1400 rpm	
Max. cut Ø	240 mm	
Max. cutting length	250 - 1500 mm	
Swivel frame extension	No	
Saw stop	No	

LOGISTICAL DATA

	230 V~	400 V~
Weight net / gross	95.5 / 117 kg	89.5 / 111 kg
Packaging dimensions	1200 x 800 x 1274 mm	
Item number	5905109901	5905109902
EAN	4014915194163	4014915194064
1 Lkw	34 pcs.	

230 V~ / 400 V

3000W / 4500W

700 mm

1400 rpm

240 mm


250 - 1500 mm



The patented protection cover allows safe and comfortable working with the HS720.



The machine can be moved easily, thanks to the integrated wheels

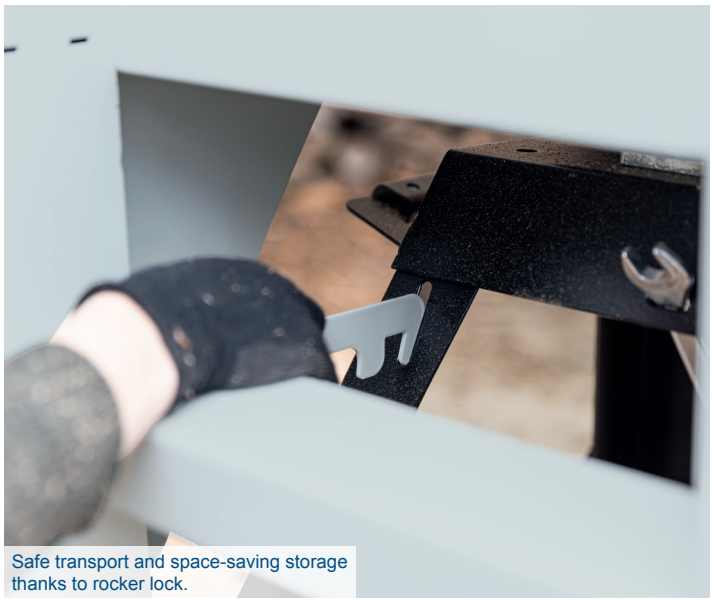

Safe transport and space-saving storage thanks to rocker lock.



Both softwood and hardwood can be processed perfectly using the HS720.



Several cuts in one action.

04/2026 Technical modifications and errors reserved.

700 MM ROCKING LOG SAW

HS730



PRODUCT DATA

Dimensions L x W x H	1160 x 800 x 1155 mm
Mains voltage	400 V
Power	5000 W
Saw blade specification	700 mm
Saw blade speed	1400 rpm
Max. cut Ø	30 - 250 mm
Max. cutting length	250 - 1000 mm
Swivel frame support	740 mm
Swivel frame extension	1200 mm
Saw stop	Yes

LOGISTICAL DATA

Weight net / gross	94 / 118 kg
Packaging dimensions	1075 x 800 x 1230 mm
Item number	5905128902
EAN	4046664243571
20 containers	/
40 containers	/
40 HQ containers	60 pcs.

400 V | 5000 W | 700 mm | 1400 rpm | 30 - 250 mm | 250 - 1000 mm

APPLICATION EXAMPLES



Hardwood



Softwood



High cutting performance thanks to powerful motor.



Practical transport device for easy transport.



Safe and comfortable working thanks to patented protective cover.

04/2026 Technical modifications and errors reserved.

scheppach Germany

DIGITAL TABLETOP DRILL

DP55



Click here for optional accessories


PRODUCT DATA

Dimensions L x W x H	380 x 250 x 675 mm
Mains voltage	220 – 240 V~ / 50 Hz
Power	710 W
Speed range	500 – 2600 rpm
Chuck clamping range	1.5 - 13 mm
Max. drilling diameter	40 mm
Drill stroke	70 mm
Swing	125 mm
Distance between spindle and drilling table	280 mm
Column diameter	46 mm
Base plate size	320 x 305 x 30 mm
LED	Yes
Laser	Yes

LOGISTICAL DATA

Weight net / gross	8.3 / 9.9 kg
Packaging dimensions	690 x 340 x 220 mm
Item number	5906822901
EAN	4046664094913
20 containers	558 pcs.
40 containers	1218 pcs.
40 HQ containers	1458 pcs.

Digital display




Precision laser



500 – 2600 rpm



Quick-release clamp



1.5 - 13 mm



Ergonomic handle



UNIVERSAL APPLICATION



Wood




Steel



Metal



Aluminium

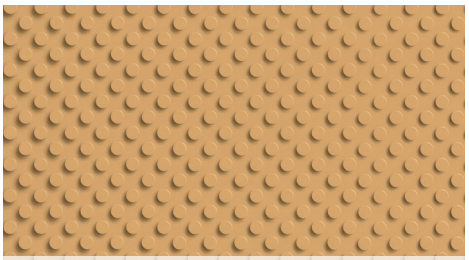


Plastic




Quick-release clamp for safe and precise drilling.



The depth stop allows you to drill precisely to a specific depth.

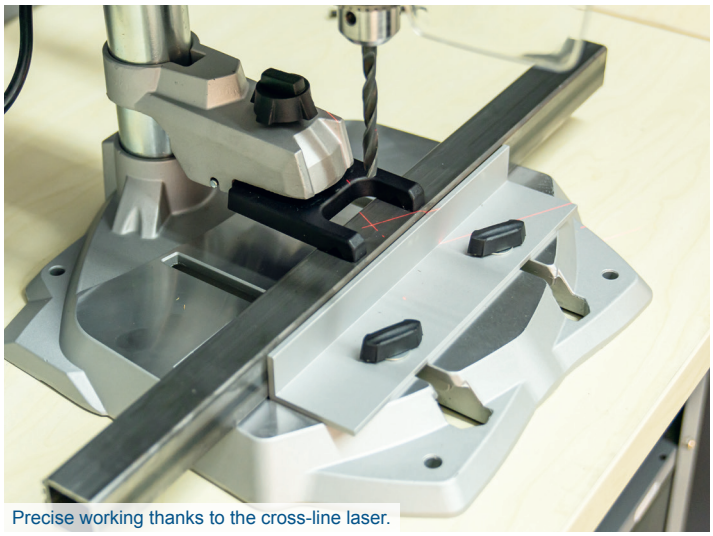

Precise working thanks to the cross-line laser.

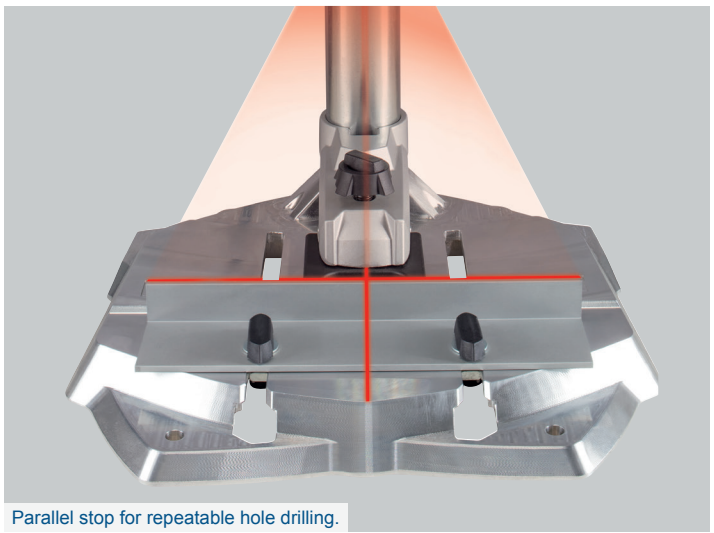

Parallel stop for repeatable hole drilling.

04/2026 Technical modifications and errors reserved.

scheppach Germany

DIGITAL TABLETOP DRILL

DP60



Click here for optional accessories

Scheppach DP60

Heimwerker Praxis 6/2020 — Oberklasse 1,6 — *Preis/Leistung: gut – sehr gut*

selber machen — PREIS-LEISTUNG — ★★★★★ SEHR GUT — AUSGABE 02/2025


PRODUCT DATA

Dimensions L x W x H	350 x 300 x 750 mm
Mains voltage	220 – 240 V~ / 50 Hz
Power	710 W
Speed range	170 – 880 / 490 – 2600 rpm
Chuck clamping range	1.5 - 13 mm
Max. drilling diameter	40 mm
Drill stroke	100 mm
Swing	125 mm
Distance between spindle and drilling table	280 mm
Column diameter	46 mm
Base plate size	350 x 300 x 30 mm
LED	Yes
Laser	Yes

LOGISTICAL DATA

Weight net / gross	9.4 / 11.5 kg
Packaging dimensions	690 x 340 x 200 mm
Item number	5906821901
EAN	4046664092209
20 containers	576 pcs.
40 containers	1224 pcs.
40 HQ containers	1445 pcs.

Digital display




Precision laser



170 – 2600 rpm



Quick-release clamp



1.5 - 13 mm



2-speed gearbox



UNIVERSAL APPLICATION



Wood




Steel



Metal



Aluminium

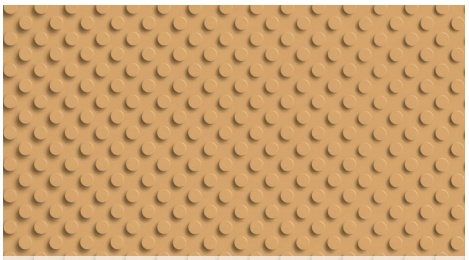

Plastic



Quick-release clamp for safe and precise drilling.




Handle that can be mounted on either side.



Speed control.



Rapid, tool-free drill bit replacement thanks to professional quick-release chuck.

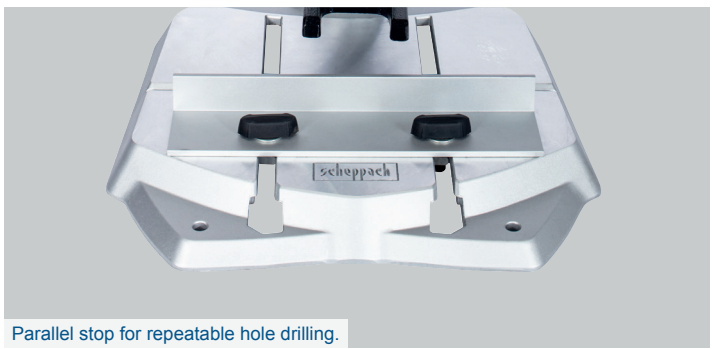

Parallel stop for repeatable hole drilling.


04/2026 Technical modifications and errors reserved.

scheppach Germany

BENCH DRILL

TBM200

Click here for optional accessories

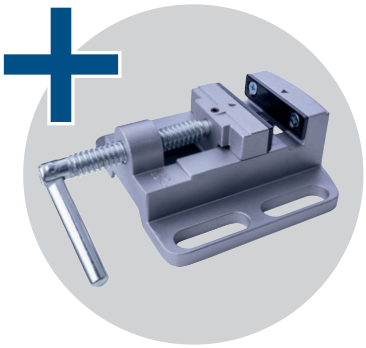



PRODUCT DATA	
Dimensions L x W x H	445 x 215 x 590 mm
Mains voltage	230 V~ / 50 Hz
Power	400 W
Speed range	5 steps from 550 – 2600 rpm
Chuck clamping range	1.5 - 13 mm
Drill stroke	50 mm
Swing	102 mm
Distance between spindle and drilling table	251 mm
Column diameter	46 mm
Base plate size	298 x 190 mm

LOGISTICAL DATA	
Weight net / gross	13.5 / 15 kg
Packaging dimensions	520 x 445 x 255 mm
Item number	5906832901
EAN	4046664256878
20 containers	488 pcs.
40 containers	936 pcs.
40 HQ containers	1170 pcs.

400 W motor

Belt drive

Speed adjustment in 5 stages 550 – 2600 rpm


Swivelling drilling table + / -45°

Drilling depth 50 mm

1.5 - 13 mm

UNIVERSAL APPLICATION













Speed adjustment in 5 stages from 550 - 2600 rpm.



The large drilling table is steplessly height-adjustable, it can be rotated 360° and tilted to the left or right up to 45°.



Extra large 102 mm swing to allow reliable processing even of big work pieces.



Ergonomically shaped, rubberised feed handle ensures ideal transfer of power.



Adjustable depth stop for precise hole depths.



Bench vice to securely fix the workpiece.

04/2026 Technical modifications and errors reserved.

INCLUDING

- **Bench vice**

scheppach Germany

BENCH DRILL

TBM250



Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	235 × 482 × 730 mm
Mains voltage	230 – 240 V~ / 50 Hz
Power	550 W
Speed range	5 steps from 510 – 2430 rpm
Chuck clamping range	1.5 - 13 mm
Max. drilling diameter	30 mm
Drill stroke	50 mm
Swing	127 mm
Distance between spindle and drilling table	405 mm
Column diameter	48 mm
Base plate size	319 x 186 mm
Laser	Yes
LED	No

LOGISTICAL DATA

Weight net / gross	18 / 20 kg
Packaging dimensions	615 x 460 x 295 mm
Item number	5906833901
EAN	4046664256861
20 containers	329 pcs.
40 containers	665 pcs.
40 HQ containers	855 pcs.

550 W motor

Belt drive

5 stages
510 – 2430 rpm


+ / -45°

Drilling depth 50 mm

1.5 - 13 mm

UNIVERSAL APPLICATION











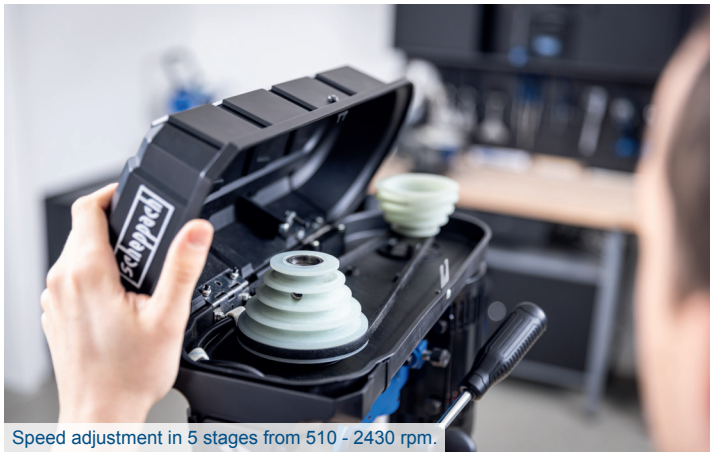



Speed adjustment in 5 stages from 510 - 2430 rpm.

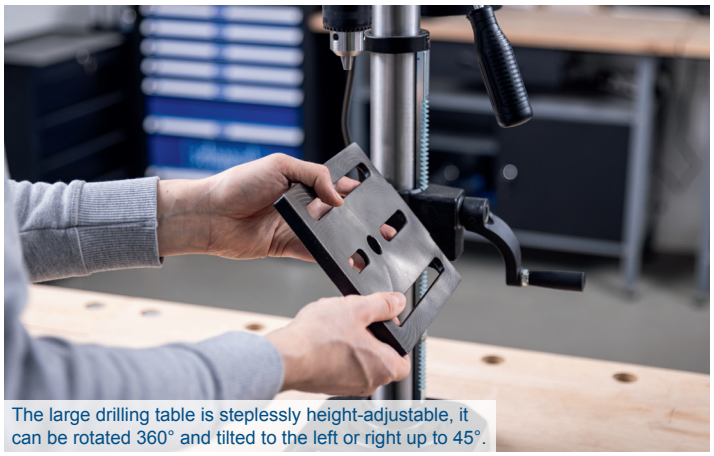
The large drilling table is steplessly height-adjustable, it can be rotated 360° and tilted to the left or right up to 45°.


Extra large 127 mm swing to allow reliable processing even of big work pieces.


High-quality, ball-bearing gear rim drill chuck for common drill bits from 1.5 to 13 mm.

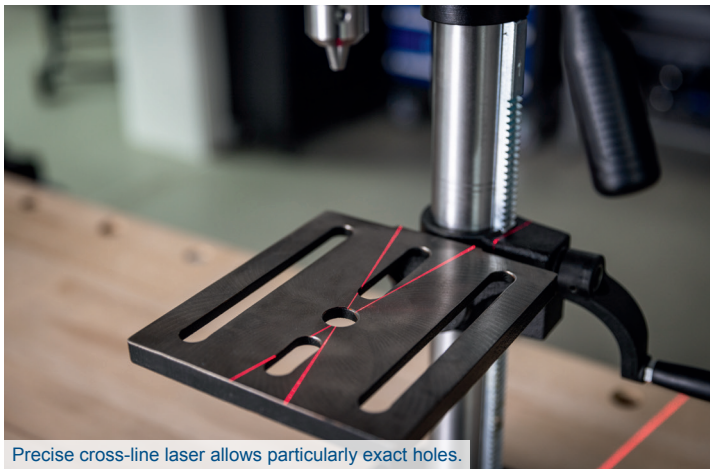
Precise cross-line laser allows particularly exact holes.


Steplessly adjustable drilling depth up to a maximum of 50 mm.

04/2026 Technical modifications and errors reserved.

BENCH DRILL

TBM250VARIO



DIGITAL DISPLAY

Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	340 x 500 x 870 mm
Mains voltage	230 – 240 V~ / 50 Hz
Power	600 W
Speed range	5 steps from 450 – 2580 rpm
Chuck clamping range	1.5 - 13 mm
Drill stroke	60 mm
Swing	125 mm
Distance between spindle and drilling table	465 mm
Column diameter	59.5 mm
Base plate size	334 x 206 mm

LOGISTICAL DATA

Weight net / gross	26 / 28 kg
Packaging dimensions	705 x 535 x 275 mm
Item number	5906834901
EAN	4046664256885
20 containers	256 pcs.
40 containers	536 pcs.
40 HQ containers	648 pcs.

600 W motor

Belt drive

Speed adjustment in 5 stages 450 – 2580 rpm


Swivelling drilling table + / -45°

Drilling depth 60 mm

1.5 - 13 mm

UNIVERSAL APPLICATION













A practical digital display shows the current speed.



The large cast iron drilling table is steplessly height-adjustable, it can be rotated 360° and tilted to the left or right up to 45°.



High-quality, ball-bearing quick-release drill chuck for common drill bits from 1.5 to 13 mm.



Ergonomically shaped, rubberised feed handle ensures ideal transfer of power.



Adjustable depth stop for precise hole depths.



Steplessly adjustable drilling depth up to a maximum of 60 mm.

04/2026 Technical modifications and errors reserved.

scheppach Germany

BENCH DRILL

TBM300VARIO



DIGITAL DISPLAY

Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	540 x 390 x 950 mm
Mains voltage	230 – 240 V~ / 50 Hz
Power	750 W
Speed range	440 – 2580 rpm
Chuck clamping range	1.0 - 16 mm
Drill stroke	80 mm
Swing	152 mm
Distance between spindle and drilling table	495 mm
Column diameter	65 mm
Base plate size	410 x 250 mm
Laser	Yes
LED	Yes

LOGISTICAL DATA

Weight net / gross	34 / 36 kg
Packaging dimensions	765 x 550 x 305 mm
Item number	5906835901
EAN	4046664256892
20 containers	217 pcs.
40 containers	448 pcs.
40 HQ containers	512 pcs.

750 W motor

Belt drive

Speed setting 440 – 2580 rpm


Swivelling drilling table + / -45°

Drilling depth 80 mm

1.0 - 16 mm


UNIVERSAL APPLICATION













Control panel with digital display to show the current speed.




The large cast iron drilling table is steplessly height-adjustable, it can be rotated 360° and tilted to the left or right up to 45°.



High-quality, ball-bearing quick-release drill chuck with protective cover for common drill bits from 1.0 to 16 mm.



Practical LED light allows an ideal view of the work piece.

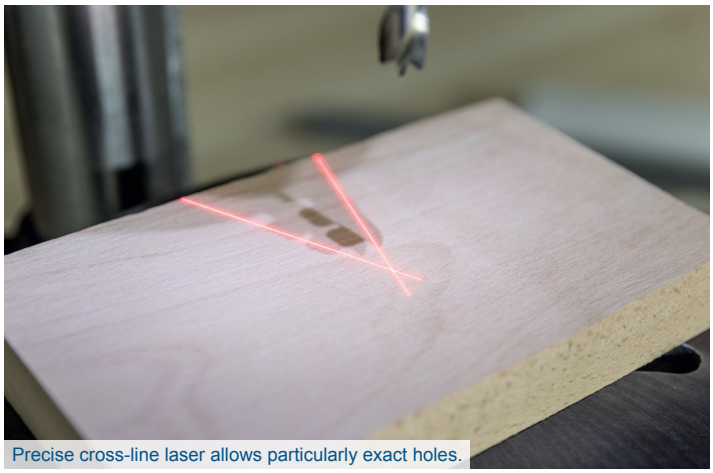

Precise cross-line laser allows particularly exact holes.



The belt pulley allows stepless speed adjustment.

04/2026 Technical modifications and errors reserved.

scheppach Germany

355 MM METAL CUTTING CHOP SAW

MT150




PRODUCT DATA

Dimensions L x W x H	123 x 123 x 123 mm
Mains voltage	220 – 240 V~ / 50 Hz
Power	2600 W
Cutting disc specification	355 x 25.4 x 3 mm
Cutting disc speed	4200 rpm
Max. cutting capacity	Ø 115 mm / 137 x 100 mm
Mitre angle	45° – 0° – 30°


LOGISTICAL DATA

Weight net / gross	12.9 / 14.6 kg
Packaging dimensions	550 x 310 x 410 mm
Item number	5903703901
EAN	4046664139393
20 containers	415 pcs.
40 containers	850 pcs.
40 HQ containers	1000 pcs.


2600 W




Ø 115 mm




115 x 115 mm



137 x 100 mm



355 mm / 25.4 mm



4200 rpm



SUITABLE FOR



Metal pipes



Square pipes




Solid metal



The work piece can be quickly and firmly secured at any angle.



The adjustable handle ensures fatigue-free working with the saw.

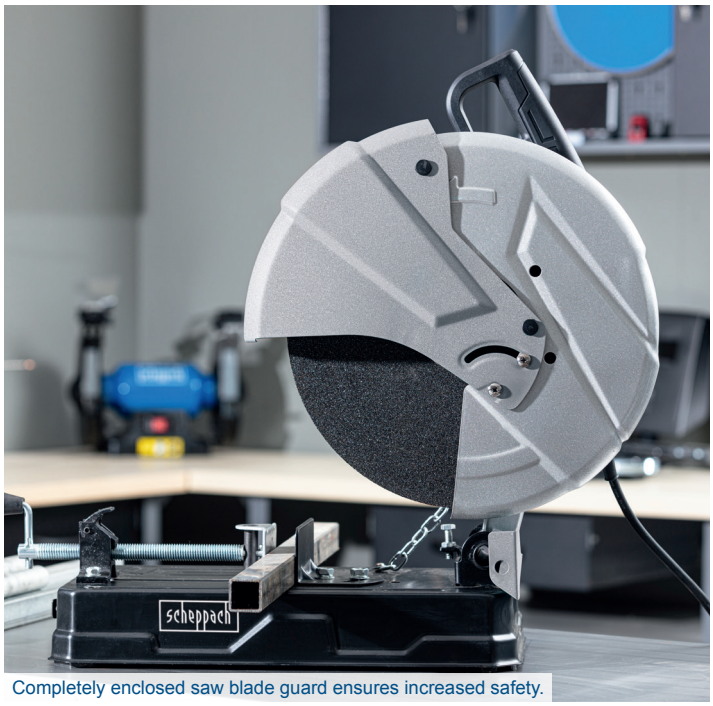

Completely enclosed saw blade guard ensures increased safety.



Easy storage.

04/2026 Technical modifications and errors reserved.

scheppach Germany

PETROL CUT-OFF SAW

PTS400

2in1

- Wet cuts
- Dry cuts




PRODUCT DATA

Dimensions L x W x H	830 x 420 x 250 mm
Engine	2-stroke petrol engine
Power	2.9 kW / 3.95 PS
Fuel type	Petrol
Mixing ratio	1:40
Cutting disc specification	350 x 25.4 mm
Cutting disc speed	3000 ± 200 rpm
Max. cut depth	120 mm
CO_2 emissions	908.4 g/kWh


LOGISTICAL DATA

Weight net / gross	13.1 / 16.65 kg
Packaging dimensions	760 x 270 x 420 mm
Item number	5915201903
EAN	4046664261001
20 containers	320 pcs.
40 containers	660 pcs.
40 HQ containers	760 pcs.

2-stroke petrol engine
3.95 PS / 2.9 kW / 65 cm³



120 mm



350 x 25.4 mm



1:40



3000 ± 200 rpm



APPLICATION EXAMPLES



Concrete areas



Paving stones



Edging stones



Water pressure can be adjusted via valves by the saw blade



Practical wheels allow comfortable working



Garden hose coupling for wet cuts

04/2026 Technical modifications and errors reserved.

INCLUDING

- **Replacement air filter**

scheppach Germany

METAL BAND SAW

MBS1200

2in1

- Can be used freehand
- Can be used with base frame

Click here for optional accessories



PRODUCT DATA

Dimensions L x W x H	648 x 291 x 573 mm
Mains voltage	220 – 240 V~ / 50 Hz
Power	1200 W
Max. cutting width/height 90°	127 / 127 mm
Max. cutting width/height 45°	41.5 / 127 mm
Saw band length	1141 mm
Saw band width	12.7 x 0.65 mm
Belt speed	0.7 – 2.2 m/s
Tilt angle	0° – 45°
LED	Yes


LOGISTICAL DATA

Weight net / gross	13.6 / 15.3 kg
Packaging dimensions	380 x 360 x 565 mm
Item number	5901508901
EAN	4046664122364
20 containers	368 pcs.
40 containers	744 pcs.
40 HQ containers	872 pcs.

1141 mm | max. 80 mm | LED | 1200 W | 0.7–2.4 m/s | 2 in 1




Using the MBS1200, mitre cuts of 0° - 45° can be sawed.

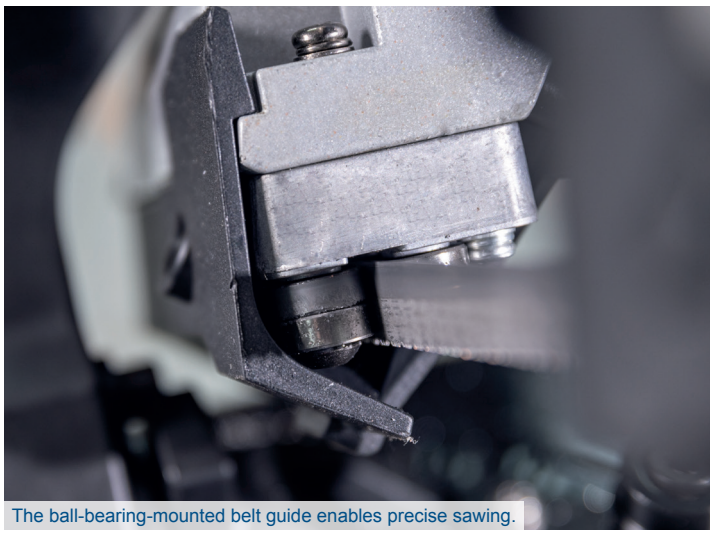

The ball-bearing-mounted belt guide enables precise sawing.



The adjustable handle ensures fatigue-free working with the saw.

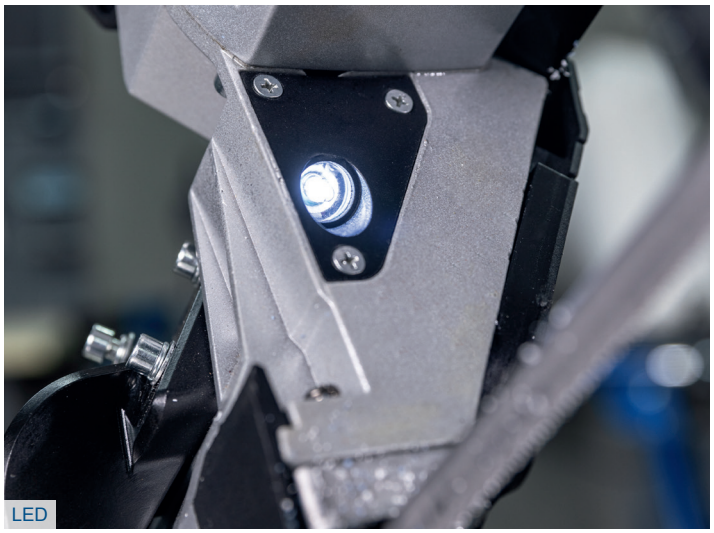

LED

VARIABLE CUTTING SPEEDS



Iron



Steel



Aluminium



Stainless steel



Plastic



Copper

04/2026 Technische Änderungen und Irrtum vorbehalten.

INCLUDING

- 2 saw bands (10 T / 14 T)
- LED work lamp
- Allen key
- 2.2 m cable

scheppach Germany

CHAIN HOIST

CB01



PRODUCT DATA

Dimensions L x W x H	3100 x 140 x 130 mm
Lifting height	3000 mm
Max. payload	1000 kg
Non-return device	Yes
Rotation range	360°

LOGISTICAL DATA

Weight net / gross	9.5 / 10 kg
Packaging dimensions	250 x 170 x 145 mm
Item number	4907401000
EAN	4046664015307
20 containers	2500 pcs.
40 containers	2800 pcs.
40 HQ containers	2800 pcs.


3000 mm



Max. 1000 kg



360°



Load chain length
3000 mm




Operating chain length
2500 mm



APPLICATION EXAMPLES


Yard

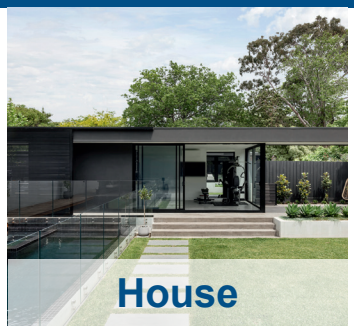
House



Workshop


Construction site


Load hook with safety bar.



Mounting head rotates 360°

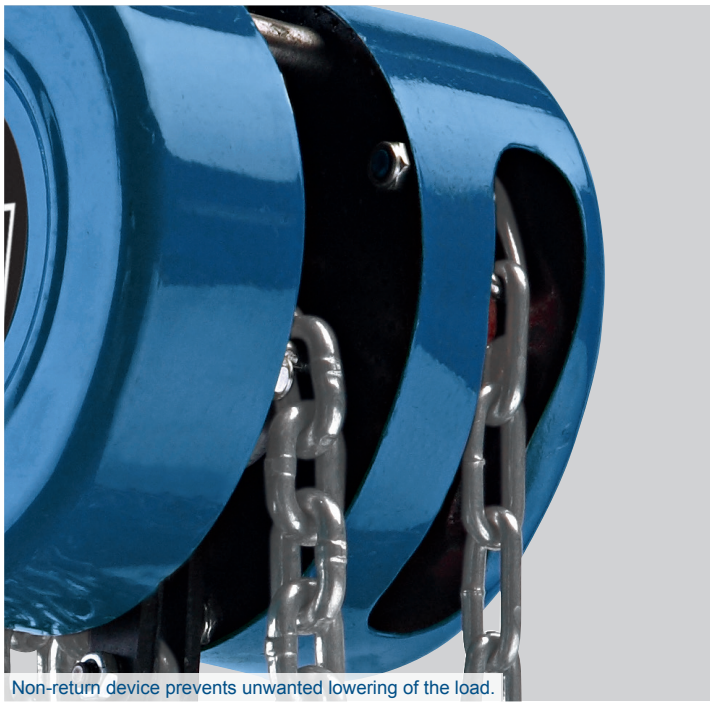
Non-return device prevents unwanted lowering of the load.

04/2026 Technical modifications and errors reserved.

CHAIN HOIST

CB02



PRODUCT DATA

Dimensions L x W x H	3100 x 140 x 130 mm
Lifting height	3000 mm
Max. payload	2000 kg
Non-return device	Yes
Rotation range	360°

LOGISTICAL DATA

Weight net / gross	13.4 / 13.9 kg
Packaging dimensions	270 x 190 x 145 mm
Item number	4907402000
EAN	4046664015314
20 containers	1900 pcs.
40 containers	2150 pcs.
40 HQ containers	2150 pcs.


3000 mm



Max. 2000 kg



360°



Load chain length
3000 mm




Operating chain length
2500 mm



APPLICATION EXAMPLES


Yard

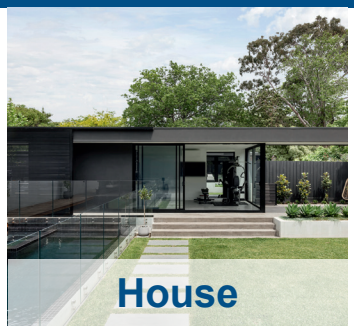
House



Workshop


Construction site


Load hook with safety bar.



Mounting head rotates 360°

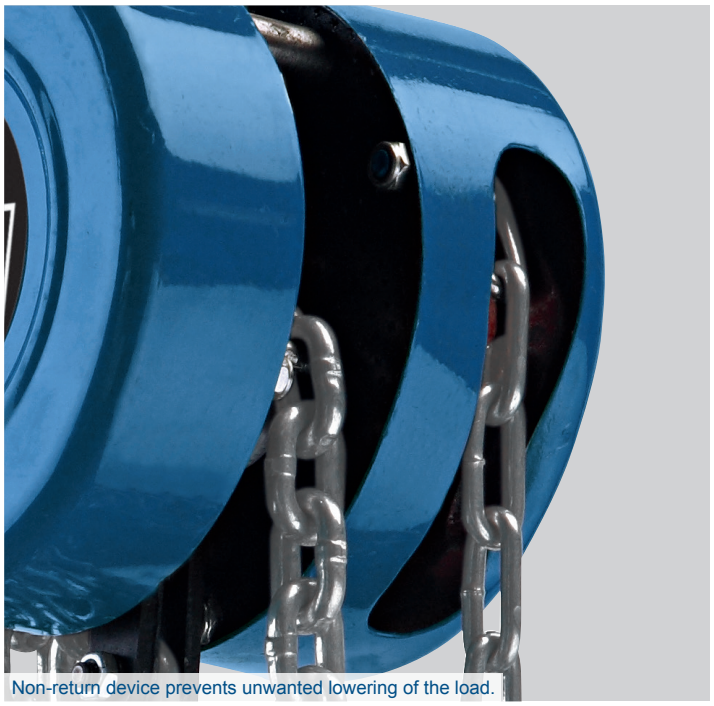
Non-return device prevents unwanted lowering of the load.

04/2026 Technical modifications and errors reserved.

scheppach Germany

ELECTRIC CABLE HOIST

HRS300



PRODUCT DATA

Dimensions L x W x H	353 x 140 x 210 mm
Mains voltage	230 V~
Power	500 W
Lifting height	6 m / 12 m
Hoisting speed	4 m/min / 8 m/min
Max. payload	125 kg / 250 kg
Steel cable Ø	3,2 mm
Operating cable length	650 mm

LOGISTICAL DATA


Weight net / gross	10.95 / 11.3 kg
Packaging dimensions	358 x 145 x 240 mm
Item number	5906906901
EAN	4046664256649
20 containers	1500 pcs.
40 containers	1800 pcs.
40 HQ containers	1800 pcs.

230 V~ | 500 W | 6 m / 12 m | Max. 125 kg / 250 kg



APPLICATION EXAMPLES



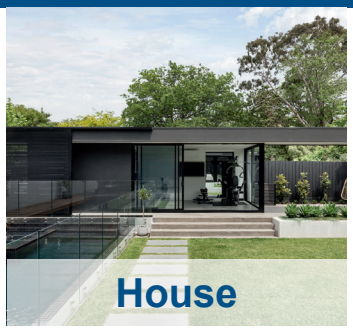







Emergency switch for safe working.



Safety hook: prevents the load slipping out.



Limit switch: for immediate deactivation in the upper and lower end position.

04/2026 Technical modifications and errors reserved.

ELECTRIC CABLE HOIST

HRS500



PRODUCT DATA

Dimensions L x W x H	378 x 150 x 220 mm
Mains voltage	230 V~
Power	800 W
Lifting height	6 m / 12 m
Hoisting speed	4 m/min / 8 m/min
Max. payload	200 kg / 400 kg
Steel cable Ø	3.2 mm
Operating cable length	650 mm

LOGISTICAL DATA


Weight net / gross	15.6 / 16 kg
Packaging dimensions	383 x 155 x 250 mm
Item number	5906907901
EAN	4046664256595
20 containers	1000 pcs.
40 containers	1200 pcs.
40 HQ containers	1200 pcs.

230 V~ | 800 W | 6 m / 12 m | 200 kg / 400 kg



APPLICATION EXAMPLES



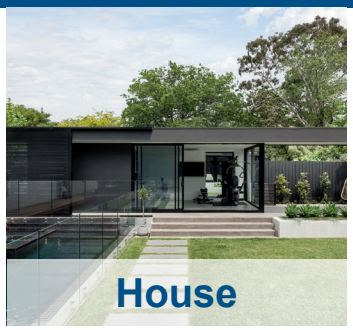







Emergency switch for safe working.



Safety hook: prevents the load slipping out.



Limit switch: for immediate deactivation in the upper and lower end position.

04/2026 Technical modifications and errors reserved.

ELECTRIC RECIPROCATING SAW

AZE430



Click here for optional accessories

OPTIONAL ACCESSORIES



- 7901811601 for bricks/aerated concrete 78 T
- 7901811602 for bricks / aerated concrete 48 T
- 7901811603 for wood
- 7901811604 for insulation

PRODUCT DATA

Dimensions L x W x H	970 x 220 x 125 mm
Mains voltage	230 – 240 V~ / 50 Hz
Power	1500 W
Idle speed	2,850 rpm
Max. cutting length	430 mm
Blade length	550 mm
Stroke length	40 mm
Cable length	2 m

LOGISTICAL DATA

Weight net / gross	6.3 / 7.3 kg
Packaging dimensions	970 x 229 x 131 mm
Item number	5901824901
EAN	4046664280835
20 containers	1040 pcs.
40 containers	2060 pcs.
40 HQ containers	2560 pcs.

1500 W | 550 mm | 430 mm | 40 mm | 2,850 rpm





Powerful universal saw for versatile applications on the construction site for sawing insulation wool, bricks, aerated concrete blocks or wood.



Ergonomically shaped additional handle for fatigue-free working.



Low-dust working thanks to extraction option directly on the machine.



4 m connection cable for flexible working.



Durable, low-vibration and kickback-free double saw blade system.



Greater safety thanks to integrated saw blade quick-stop function: Saw blade is ready within 3 seconds.

UNIVERSAL APPLICATION



Brick



Aerated concrete block



Insulation wool



Wood

04/2026 Technical modifications and errors reserved.

scheppach Germany

7" SLIDING TABLE TILE CUTTER

WTS180

Click here for optional accessories



PRODUCT DATA	
Dimensions L x W x H	406 x 395 x 165 mm
Mains voltage	230 V~
Power	710 W
Cutting disc specification	180 x 22.23 x 1.2 mm
Cutting disc speed	32 mm
Max. cutting height 90°	34
Table size	395 x 385 mm

LOGISTICAL DATA	
Weight net / gross	6 / 7 kg
Packaging dimensions	415 x 400 x 180 mm
Item number	5906712901
EAN	4046664306740
20 containers	840 pcs.
40 containers	1680 pcs.
40 HQ containers	1990 pcs.

395 x 385 mm



34 mm




Water cooling



710 W



Ø 180 x 22.23 x 1.2 mm




4000 rpm




UNIVERSAL APPLICATION


Marble


China

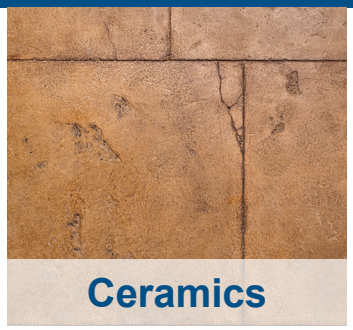
Ceramics


Tiles

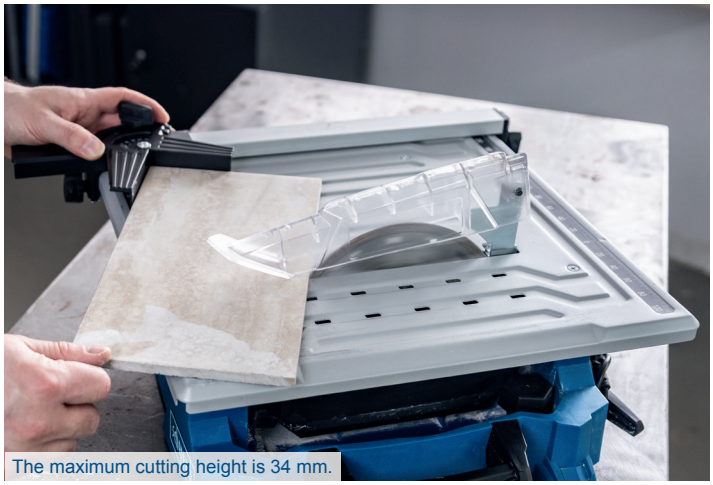
The maximum cutting height is 34 mm.


Angular stop enables mitre cuts of 0° to +45° and integrated measurement scale ensures accurate cuts.


Storage options for the rip fence and mitre fence, as well as other accessories.



The protective cover can be height-adjusted, allowing different material thicknesses to be cut safely.


The parallel stop enables particularly precise cuts.



Mobile thanks to its low weight of only 11.75 kg and rubberised transport handles

04/2026 Technical modifications and errors reserved.

scheppach Germany

7” SLIDING TABLE TILE CUTTER

WTS2000

Click here for optional accessories



PRODUCT DATA	
Dimensions L x W x H	616 x 494 x 178 mm
Mains voltage	230 V~
Power	900 W
Cutting disc specification	180 x 25.4 mm
Cutting disc speed	3600 RPM
Max. cutting height 90°	32 mm
Table size	493 x 270 mm

LOGISTICAL DATA	
Weight net / gross	11.75 / 14 kg
Packaging dimensions	640 x 520 x 205 mm
Item number	5906711901
EAN	4046664194613
20 containers	400 pcs.
40 containers	820 pcs.
40 HQ containers	977 pcs.

395 x 385 mm

34 mm

Water cooling

710 W

Ø 180 x 22.23 x 1.2 mm

4000 rpm

UNIVERSAL APPLICATION



Marble



China




Ceramics




Tiles



Storage options for the rip fence and mitre fence, as well as other accessories.

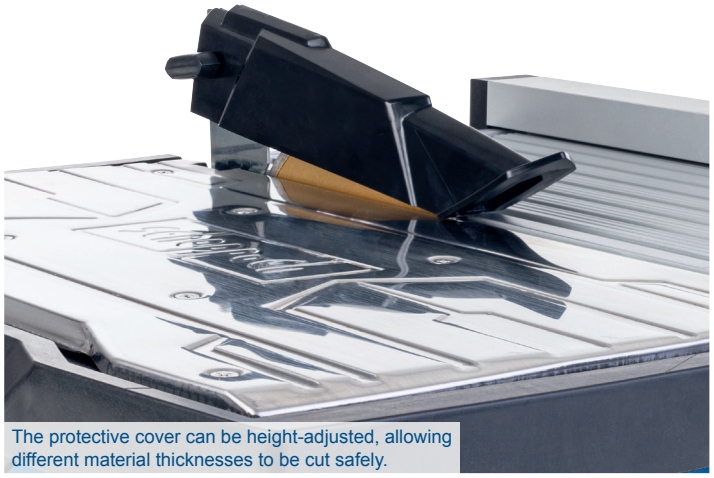

The protective cover can be height-adjusted, allowing different material thicknesses to be cut safely.

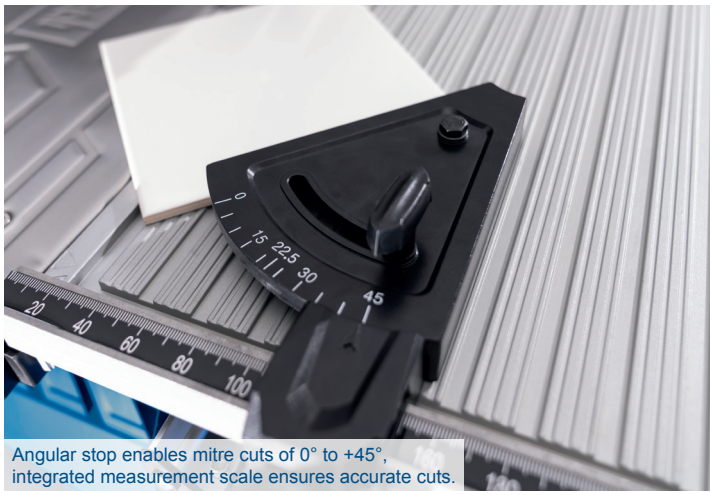

Angular stop enables mitre cuts of 0° to +45°, integrated measurement scale ensures accurate cuts.




Mobile thanks to its low weight of only 11.75 kg and rubberised transport handles.

04/2026 Technical modifications and errors reserved.

scheppach Germany

920 MM STONE AND TILE CUTTERS

FS3600

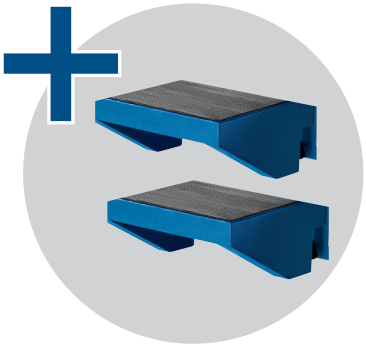



Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	1560 x 440 x 1140 mm
Mains voltage	230 V~
Power	900 W
Cutting disc specification	Diamond cutting wheel Ø 200 x 25.4 mm
Cutting disc speed	3000 rpm
Max. cutting height 90°	36 mm
Max. cutting height 45°	29 mm
Max. cutting length	920 mm
Tilt angle	0° – 45°
Table size	1290 × 400 mm
Machine stand	Yes

LOGISTICAL DATA

Weight net / gross	50 / 59 kg
Packaging dimensions	1530 x 540 x 585 mm
Item number	5906706901
EAN	4046664034315
20 containers	42 pcs.
40 containers	90 pcs.
40 HQ containers	120 pcs.

395 x 385 mm



34 mm




Water cooling



710 W



Ø 180 x 22.23 x 1.2 mm




4000 rpm



UNIVERSAL APPLICATION




Marble

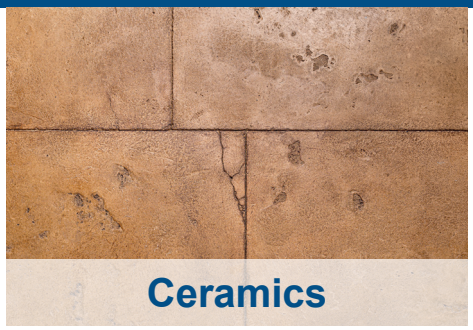

Ceramics




Tiles

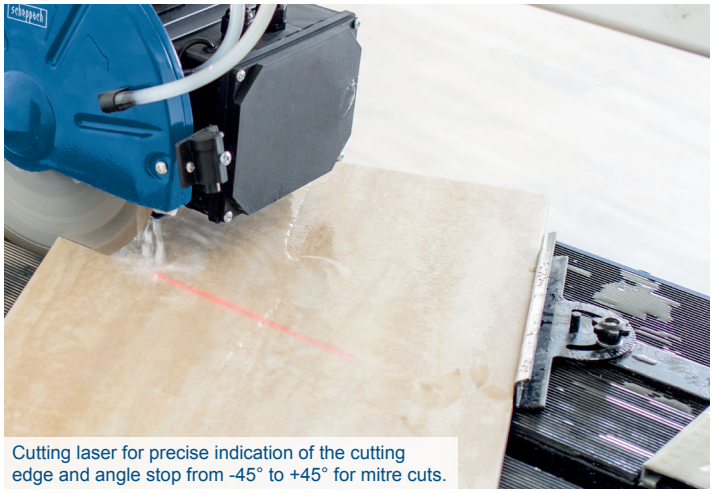

Cutting laser for precise indication of the cutting edge and angle stop from -45° to +45° for mitre cuts.



2 table width extensions to increase the shelving area for large work pieces.

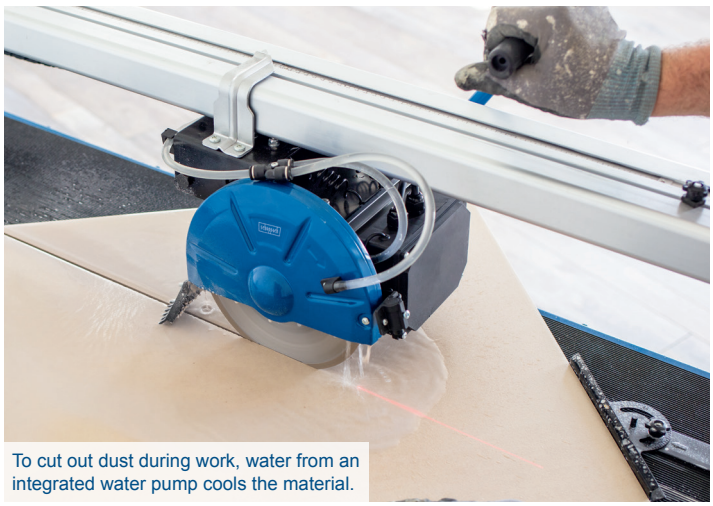


To cut out dust during work, water from an integrated water pump cools the material.




Thanks to the adjustable sawing unit, clean mitre cuts of 0° – 45° can be created.


UNIVERSAL APPLICATION

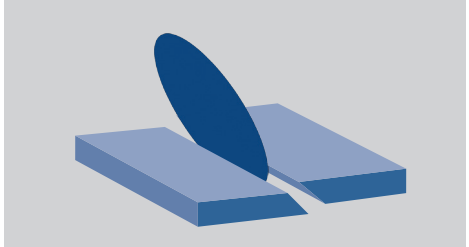

Mitre cut

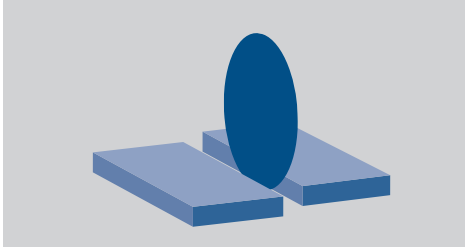

Longitudinal cut

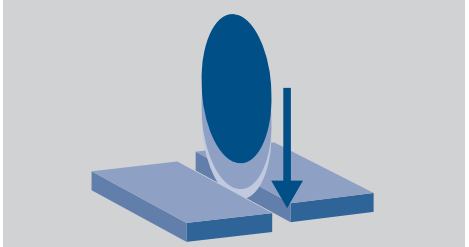

Plunge cut

04/2026 Technical modifications and errors reserved.


INCLUDING

- 2 table width extensions

scheppach Germany

1200 MM STONE AND TILE CUTTERS

FS4700

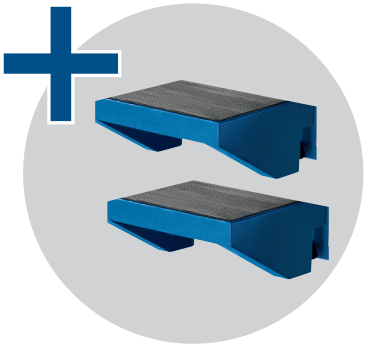



Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	1845 x 440 x 1155 mm
Mains voltage	230 V~
Power	1200 W
Cutting disc specification	Diamond cutting wheel Ø 230 x 25.4 mm
Cutting disc speed	3000 rpm
Max. cutting height 90°	40 mm
Max. cutting height 45°	34 mm
Max. cutting length	1200 mm
Tilt angle	0° – 45°
Table size	1377 × 400 mm
Machine stand	Yes


LOGISTICAL DATA

Weight net / gross	57 / 66 kg
Packaging dimensions	1830 x 540 x 585 mm
Item number	5906707901
EAN	4046664034322
20 containers	36 pcs.
40 containers	78 pcs.
40 HQ containers	100 pcs.

Table area 1377 x 400 mm



Cutting length 1200 mm Cutting height 40 mm




Customisable laser



Stop rail with scale



Diamond cutting wheel Ø 230 x 25.4 mm




Speed 3000 rpm



UNIVERSAL APPLICATION




Marble

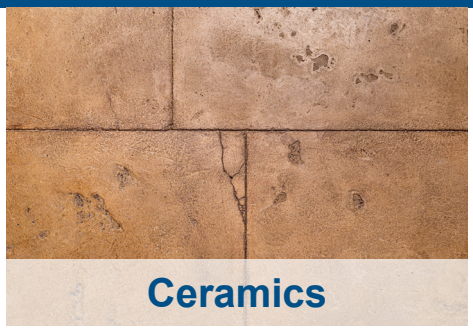

Ceramics



Tiles

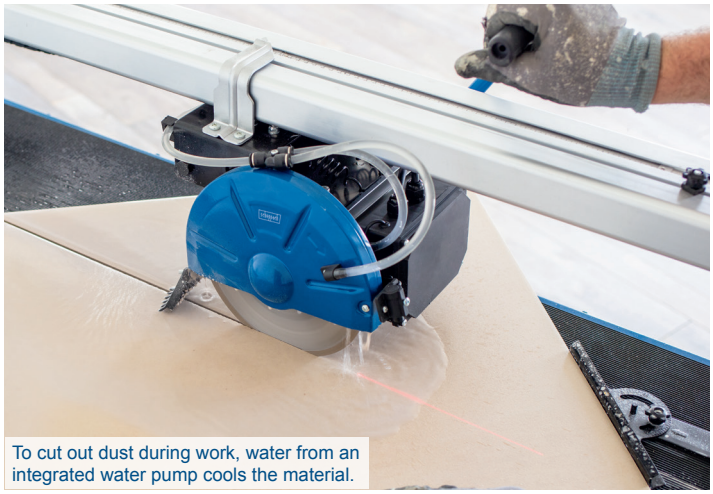


To cut out dust during work, water from an integrated water pump cools the material.



2 table width extensions to increase the shelving area for large work pieces.




Thanks to the adjustable sawing unit, clean mitre cuts of 0° – 45° can be created.

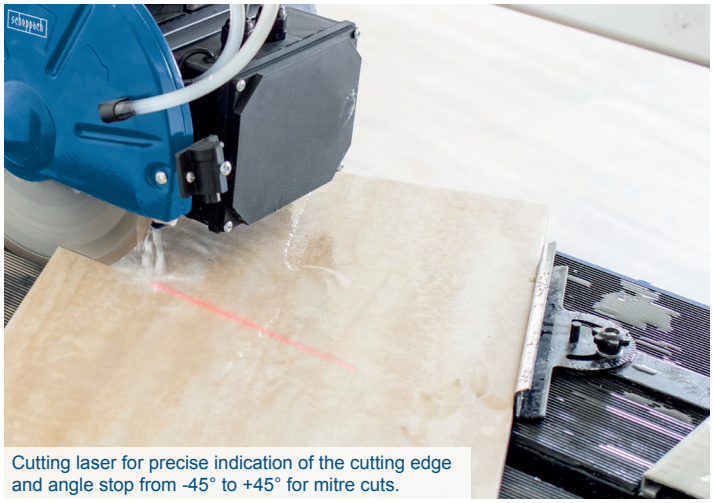


Cutting laser for precise indication of the cutting edge and angle stop from -45° to +45° for mitre cuts.


UNIVERSAL APPLICATION

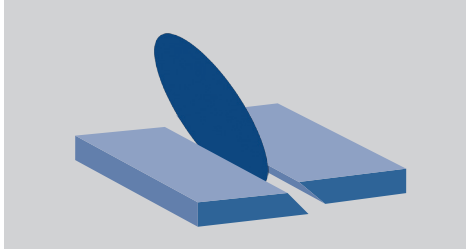

Mitre cut

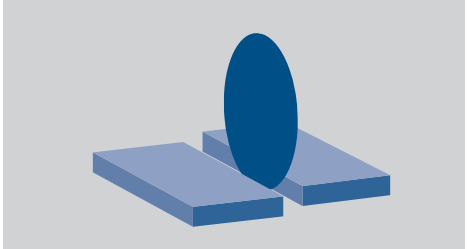

Longitudinal cut

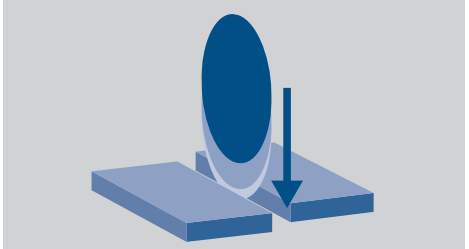

Plunge cut

04/2026 Technical modifications and errors reserved.

INCLUDING

- 2 table width extensions

scheppach Germany

360 MM STONE AND TILE CUTTERS

HSM3500

Scheppach HSM3500

Oberklasse **1,6** MOTOR & MASCHINE 4/2018
Preis/Leistung: *gut – sehr gut*



Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	1150 × 520 × 1210 mm
Mains voltage	230 V~
Power	2200 W
Cutting disc specification	Diamond cutting wheel Ø 360 x 25.4 mm
Cutting disc speed	2800 rpm
Max. cutting height 90°	110 mm
Max. cutting height 45°	72 mm
Max. cutting length	700 mm
Tilt angle	0° – 45°
Table size	535 × 430 mm
Machine stand	Yes


LOGISTICAL DATA

Weight net / gross	78 / 92 kg
Packaging dimensions	1125 x 560 x 550 mm
Item number	5906709901
EAN	4046664141013
20 containers	60 pcs.
40 containers	126 pcs.
40 HQ containers	168 pcs.

Table area
530 x 430 mm



Cutting length 700 mm
Cutting height
90° = 110 mm




Customisable laser



Transportable



Diamond cutting wheel
Ø 360 x 25.4 mm



Speed
2800 rpm




UNIVERSAL APPLICATION


Bricks


Natural stone



Tiles


Paving stones



Granite-plates


Cut large-format tiles with an edge length of 700 mm or 535 mm when cutting diagonally.


Foldable base frame for space-saving storage.

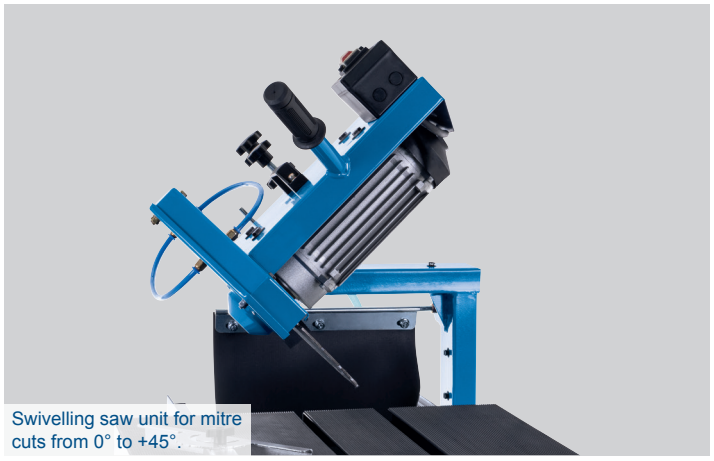
Swivelling saw unit for mitre cuts from 0° to +45°.


Transport device for easy transport.

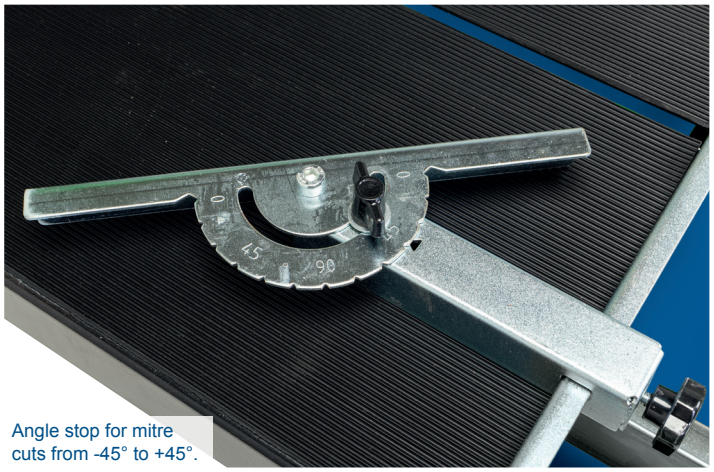
Angle stop for mitre cuts from -45° to +45°.

04/2026 Technical modifications and errors reserved.

330 MM STONE CUTTER

HSC130



PRODUCT DATA

Dimensions L x W x H	790 x 260 x 562 mm
Max. cutting length	330 mm
Cut height	140 mm
Cutting height adjustment	Steplessly
Number of blades	2

LOGISTICAL DATA

Weight net / gross	41 / 42.5 kg
Packaging dimensions	830 x 295 x 595 mm
Item number	5908501900
EAN	4046664024026
20 containers	187 pcs.
40 containers	377 pcs.
40 HQ containers	486 pcs.

Cutting height 26 – 140 mm

Cutting width max. 330 mm

Transport wheels


Robust

Transportable thanks to transport lug

UNIVERSAL APPLICATION


Bricks


Paving stones

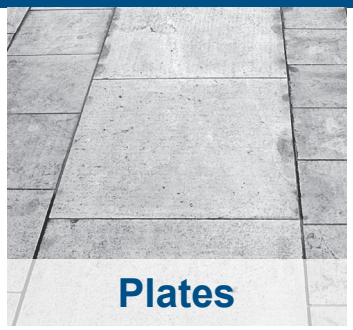
Plates


Edging stones


The HSC130 effortlessly splits different materials, thanks to the long operating handle.


The cutting height can be steplessly adjusted using the hand wheel.


Spring-loaded table pads for clean cutting results.


Easy to load, thanks to transport lug.

04/2026 Technical modifications and errors reserved.

INCLUDING

- **2x blades**

scheppach Germany

3 J ELECTRIC HAMMER DRILL

DH2260

Click here for optional accessories

4-in-1

- Drilling
- Hammer drilling
- Chisel
- Chisel position adjustment



PRODUCT DATA

Dimensions L x W x H	386 x 270 x 89 mm
Mains voltage	230 – 240 V~
Power	1050 W
Tool receiver	SDS-Plus
Max. drill Ø	26 mm (concrete) 68 mm (masonry with hollow drill bit) 13 mm (steel) 30 mm (timber)
Max. impact force	3 Joule
Max. stroke rate	0 - 5500 bpm
Idle speed	0 - 1230 bpm
Anti-vibration system	Yes
Rubber cable length	4 m

LOGISTICAL DATA

Weight net / gross	3.6 / 5.6 kg
Packaging dimensions	390 x 106 x 288 mm
Item number	5907906901
EAN	4046664279747
20 containers	1764 pcs.
40 containers	3656 pcs.
40 HQ containers	4108 pcs.

3 J

max. 5500 bpm

SDS plus

4 m

26 mm (concrete)
68 mm (masonry)
13 mm (steel)
30 mm (timber)

1050 W

UNIVERSAL APPLICATION



Drilling



Hammer drilling



Chisel



Chisel position adjustment

Additional handle, 360° rotating.



Variable speed adjustment from 0 – 1230 bpm.



Powerful 3 J impact force and up to 5500 bpm.



Selector switch for quick, tool-free switching between functions.



The SDS-Plus chuck facilitates tool-free changing of drill bits and attachments.



Compact, ergonomic design with soft-grip handle for high operator comfort.



04/2026 Technical modifications and errors reserved.

INCLUDING

- Pointed chisel 14 x 250 mm
- Flat chisel 14 x 250 mm
- Masonry drill 6/8/10 x 150 mm
- Depth stop
- Transport case

scheppach Germany

3 J ELECTRIC HAMMER DRILL

DH2280

5in1

- Drilling
- Hammer drilling
- Screws
- Chisel
- Chisel position adjustment



PRODUCT DATA

Dimensions L x W x H	386 x 270 x 89 mm
Mains voltage	230 V~ 50Hz
Power	1050 W
Tool receiver	SDS-Plus
Max. drill Ø	28 mm (concrete and stone) 13 mm (steel) 30 mm (wood)
Max. impact force	3 Joule
Max. stroke rate	0 - 5500 bpm
Idle speed	0 - 1230 bpm
Anti-vibration system	No
Rubber cable length	4 m

LOGISTICAL DATA

Weight net / gross	5,5 / 5,8 kg
Packaging dimensions	390 x 106 x 288 mm
Item number	5907908901
EAN	4046664307471
20 containers	1764 pcs.
40 containers	3656 pcs.
40 HQ containers	4108 pcs.




UNIVERSAL USE




Drilling



Hammer drilling



Screws




Chisel



Chisel position adjustment

Additional handle, 360° rotating.

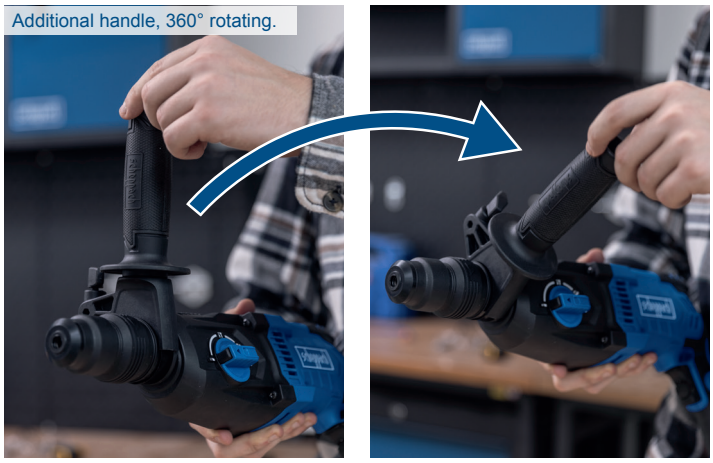

Powerful 3 J impact force and up to 5500 bpm



Variable speed adjustment from 0 – 1230 bpm.




Selector switch for quick, tool-free switching between functions.



The additional quick-action chuck expands the range of applications to include a wide variety of uses.



The SDS-Plus chuck facilitates tool-free changing of drill bits and attachments.

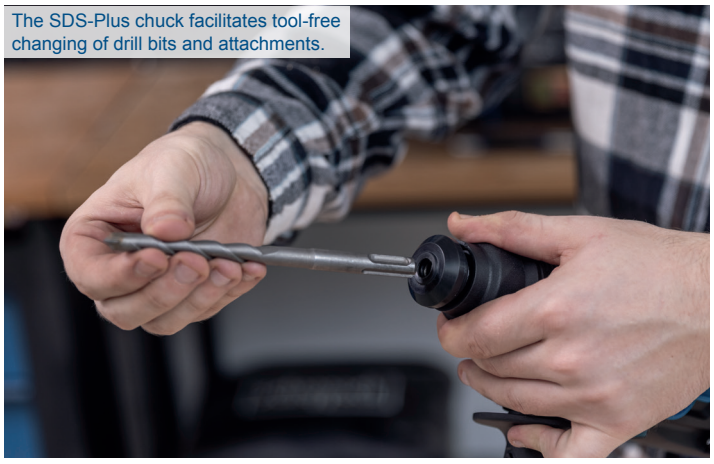

04/2026 Technical modifications and errors reserved.

INCLUDING

- Pointed chisel 14 x 250 mm
- Flat chisel 14 x 250 mm
- Masonry drill 6/8/10 x 150 mm
- Quick-change chuck
- Depth stop
- Transport case

scheppach Germany

5 J ELECTRIC HAMMER DRILL

DH2300

Click here for optional accessories

4-in-1

- Drilling
- Hammer drilling
- Chisel
- Chisel position adjustment



PRODUCT DATA

Dimensions L x W x H	388 x 111 x 262 mm
Mains voltage	230 – 240 V~Hz 50
Power	1300 W
Tool receiver	SDS-Plus
Max. drill Ø	30 mm (concrete), 13 mm (metal), 40 mm (wood)
Max. impact force	5 Joule
Max. stroke rate	4250 bpm
Idle speed	850 rpm
Anti-vibration system	Yes
Rubber cable length	4 m

LOGISTICAL DATA

Weight net / gross	5.2 / 7.7 kg
Packaging dimensions	410 x 132 x 340 mm
Item number	5907910901
EAN	4046664314769
20 containers	1310 pcs.
40 containers	2650 pcs.
40 HQ containers	3110 pcs.

5 J

4250 bpm

850 rpm

SDS plus

30 mm (concrete)
13 mm (metal)
40 mm (wood)

ANTI VIBRATION SYSTEM

UNIVERSAL USE



Drilling



Hammer drilling



Chisel



Chisel position adjustment



Powerful 5 J impact force and up to 4250 bpm.



The SDS-Plus chuck facilitates tool-free changing of drill bits and attachments.





Additional handle, 360° rotating.



Selector switch for quick, tool-free switching between functions.



Vibration-damped handle for fatigue-free working.

05/2026 Technical modifications and errors reserved.

4 m

1300 W

INCLUDING

- Pointed chisel
- Flat chisel
- Masonry drill
- Depth stop
- Transport case

scheppach Germany

7 J ELECTRIC HAMMER DRILL

DH1500Plus



4-in-1

- Drilling
- Hammer drilling
- Chisel
- Chisel position adjustment

Click here for optional accessories



PRODUCT DATA

Dimensions L x W x H	390 x 260 x 85 mm
Mains voltage	230 - 240 V~
Power	1500 W
Tool receiver	SDS-Plus
Max. drill Ø	40 mm (wood), 32 mm (concrete) 13 mm (steel)
Max. impact force	7 Joule
Max. stroke rate	4250 bpm
Idle speed	0 - 920 bpm
Anti-vibration system	Yes
Rubber cable length	3 m

LOGISTICAL DATA

Weight net / gross	5.3 / 8.3 kg
Packaging dimensions	440 x 280 x 355 mm
Item number	5907905901
EAN	4046664240181
20 containers	1310 pcs.
40 containers	2652 pcs.
40 HQ containers	3110 pcs.

7 J

max. 4250 bpm

SDS plus

3 m

40 mm (wood)
32 mm (concrete)
13 mm (steel)

1500 W

UNIVERSAL USE



Drilling



Hammer drilling



Chisel



Chisel position adjustment



Tool-free and steplessly adjustable handle.



Anti-vibration system ensures fatigue-free working.



The SDS-Plus chuck facilitates tool-free changing of drill bits and attachments.



Speed adjustable from 0 to 920 bpm via an adjusting wheel.



Selector switch for quick, tool-free switching between functions.

INCLUDING

- **Pointed chisel**
- **Flat chisel**
- **Masonry drill**
- **Depth stop**
- **Transport case**

scheppach Germany

04/2026 Technical modifications and errors reserved.

10 J ELECTRIC HAMMER DRILL

DH1600Max



Click here for optional accessories

4-in-1

- Drilling
- Hammer drilling
- Chisel
- Chisel position adjustment



PRODUCT DATA

Dimensions L x W x H	460 x 95 x 380 mm
Mains voltage	230 – 240 V~
Power	1600 W
Tool receiver	SDS-Max
Max. impact force	10 Joule
Max. stroke rate	3800 bpm
Idle speed	630 rpm
Anti-vibration system	Yes
Rubber cable length	2 m

LOGISTICAL DATA

Weight net / gross	7.3 / 11 kg
Packaging dimensions	410 x 126 x 370 mm
Item number	5907903901
EAN	4046664143246
20 containers	900 pcs.
40 containers	1864 pcs.
40 HQ containers	2196 pcs.

10 J

max. 3800 bpm

SDS max

2 m

1600 W

UNIVERSAL USE



Drilling



Hammer drilling



Chisel



Chisel position adjustment



Powerful 10 J impact force and up to 3800 bpm.




Anti-vibration system ensures fatigue-free working.



Tool-free and steplessly adjustable handle.



The SDS-Plus chuck facilitates tool-free changing of drill bits and attachments.

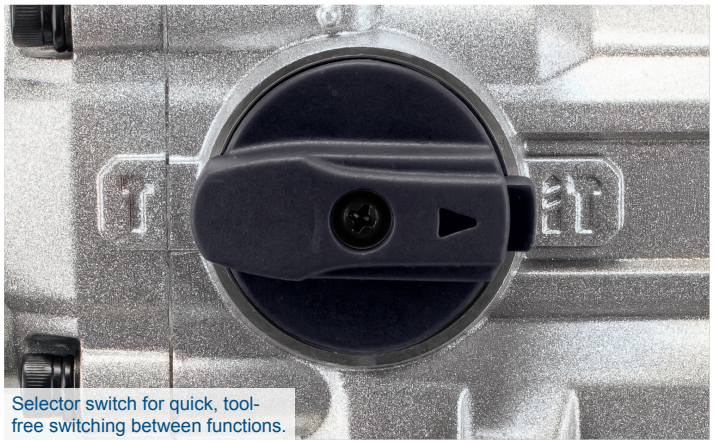

Selector switch for quick, tool-free switching between functions.

04/2026 Technical modifications and errors reserved.

INCLUDING

- **Pointed chisel**
- **Flat chisel**
- **Transport case**

scheppach Germany

20 J DEMOLITION HAMMER

AB1500X

Click here for optional accessories



PRODUCT DATA

Dimensions L x W x H	470 x 240 x 95 mm
Mains voltage	230 – 240 V~
Power	1300 W
Tool receiver	SDS-Max
Impact force	20 Joule
Number of impacts	4100 bpm
Anti-vibration system	Yes
Chisel adjustment	No
Cable length	3 m

LOGISTICAL DATA


Weight net / gross	6.0 / 9.5 kg
Packaging dimensions	490 x 320 120 mm
Item number	5908207901
EAN	404666416339
20 containers	1342 pcs.
40 containers	2780 pcs.
40 HQ containers	2780 pcs.



APPLICATION EXAMPLES


Concrete base


Tiles


Natural stone


Brick


Concrete


Fatigue-free working thanks to switch lock for continuous operation.


Easy and quick tool change thanks to SDS Max chuck.


Anti-vibration technology significantly reduces vibrations.


360° continuously and tool-free adjustable additional handle for ergonomic and fatigue-free working.



04/2026 Technical modifications and errors reserved.

INCLUDING

- Pointed chisel
- Flat chisel
- Transport case

scheppach Germany

50 J ELECTRIC DEMOLITION HAMMER

AB1600

Click here for optional accessories





PRODUCT DATA

Dimensions L x W x H	670 x 140 x 230 mm
Mains voltage	230 – 240 V~
Power	1600 W
Tool receiver	SDS-Hex
Impact force	50 Joule
Number of impacts	2000 bpm
Anti-vibration system	Yes
Chisel adjustment	No
Cable length	4 m


LOGISTICAL DATA

Weight net / gross	17 / 22.4 kg
Packaging dimensions	780 x 198 x 338 mm
Item number	5908213901
EAN	4046664287322
20 containers	760 pcs.
40 containers	1136 pcs.
40 HQ containers	1136 pcs.





Anti-vibration technology significantly reduces vibrations.

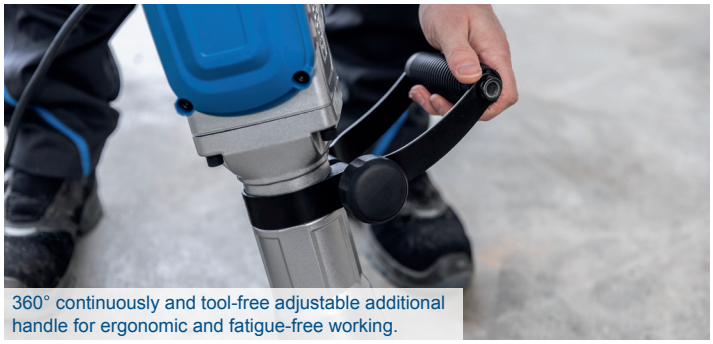

360° continuously and tool-free adjustable additional handle for ergonomic and fatigue-free working.



SDS-Hex chuck for easy, tool-free bit changes.



The compact, slim design also allows work in areas that are hard to access.



Transport case with wheels.


APPLICATION EXAMPLES



Concrete base



Tiles



Natural stone



Brick



Concrete

04/2026 Technical modifications and errors reserved.

INCLUDING

- Pointed chisel
- Flat chisel
- Transport case
- 2x Allen key
- Hexagon spanner
- 2x Carbon brushes
- Oil bottle (empty)

scheppach Germany

50 J ELEKTRO-ABBRUCHHAMMER

AB1700

Click here for optional accessories





PRODUKTDATEN

Abmessungen L x B x H	670 x 140 x 230 mm
Netzspannung	230 – 240 V~
Leistung	1700 W
Werkzeugaufnahme	SDS-Hex
Schlagkraft	50 Joule
Schlagzahl	2000 bpm
Antivibrationssystem	Ja
Meißelverstellung	Nein
Kabellänge	4 m

LOGISTISCHE DATEN


Gewicht netto / brutto	17 / 22,4 kg
Verpackungsabmessungen	780 x 198 x 338 mm
Artikelnummer	5908214901
EAN	4046664287339
20 Container	760 Stück
40 Container	1136 Stück
40 HQ Container	1136 Stück



ANWENDUNGSBEISPIELE


Betonsockel


Fliesen


Naturstein


Ziegel


Beton


Transportkoffer mit Rollen.


Kompakte und schlanke Bauweise ermöglicht das Arbeiten auch in schwer zugänglichen Bereichen.


Anti-Vibrationstechnologie reduziert Vibrationen deutlich.


Um 360° stufen- und werkzeuglos verstellbarer Zusatzhandgriff für ergonomisches und ermüdungsfreies Arbeiten.


SDS-Hex-Aufnahme für einen einfachen und werkzeuglosen Aufsatzwechsel.

04/2026 Technische Änderungen und Irrtum vorbehalten.

INKLUSIVE

- Spitzmeißel
- Flachmeißel
- Transportkoffer
- 2x Innensechskantschlüssel
- Sechskantschlüssel
- 2x Kohlebürsten
- Ölflasche (leer)

scheppach Germany

60 J ELECTRIC DEMOLITION HAMMER

AB1900

Click here for optional accessories





PRODUCT DATA	
Dimensions L x W x H	660 x 230 x 120 mm
Mains voltage	230 – 240 V~
Power	1900 W
Tool receiver	SDS-HEX
Impact force	60 Joule
Number of impacts	1900 bpm
Anti-vibration system	Yes
Chisel adjustment	No
Cable length	3 m

LOGISTICAL DATA	
Weight net / gross	16.5 / 21.5 kg
Packaging dimensions	780 x 200 x 345 mm
Item number	5908211901
EAN	4046664256663
20 containers	495 pcs.
40 containers	1136 pcs.
40 HQ containers	1136 pcs.

60 J

1900 bpm

SDS HEXAGON

ANTI VIBRATION SYSTEM

3 m

1900 W



Fatigue-free, thanks to lock for continuous operation.



Easy and quick replacement of attachments via 30 mm hexagon tool receiver.



Transport case with wheels.



360° continuously and tool-free adjustable additional handle for ergonomic and fatigue-free working.



Anti-vibration technology significantly reduces vibrations.


APPLICATION EXAMPLES



Concrete base



Tiles



Natural stone



Brick



Concrete

04/2026 Technical modifications and errors reserved.

INCLUDING

- Pointed chisel
- Flat chisel
- Transport case

scheppach Germany

60 J ELECTRIC DEMOLITION HAMMER

AB2000

Click here for optional accessories





PRODUCT DATA

Dimensions L x W x H	646 x 331 x 133 mm
Mains voltage	230 V~/ 50 Hz
Power	1700 W
Tool receiver	SDS-Max
Impact force	60 Joule
Number of impacts	200 - 2100 bpm
Anti-vibration system	yes
Chisel adjustment	yes
Cable length	4 m

LOGISTICAL DATA

Weight net / gross	18 / 17.3 kg
Packaging dimensions	725 x 345 x 185 mm
Item number	5908212901
EAN	4046664285564
20 containers	572 pcs.
40 containers	1186 pcs.
40 HQ containers	1390 pcs.

60 J

200 – 2100 bpm

SDS max

ANTI VIBRATION SYSTEM


4 m

1700 W



360° continuously and tool-free adjustable additional handle for ergonomic and fatigue-free working.



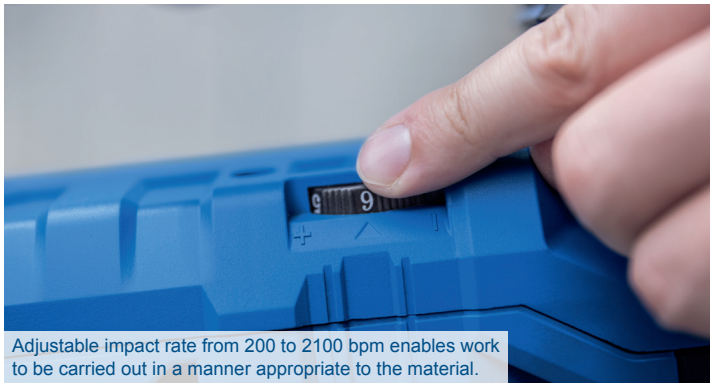

Adjustable impact rate from 200 to 2100 bpm enables work to be carried out in a manner appropriate to the material.



Anti-vibration technology significantly reduces vibrations.



Transport case with wheels.



SDS-Max chuck for easy, tool-free bit changes.


APPLICATION EXAMPLES



Concrete base



Tiles



Natural stone



Brick



Concrete

04/2026 Technical modifications and errors reserved.

INCLUDING

- Pointed chisel
- Flat chisel
- Transport case

scheppach Germany

63 L CONCRETE MIXER

MIX65



PRODUCT DATA

Dimensions L x W x H	1161 x 550 x 935 mm
Engine	230 V~
Rated output	220 W
Drum volume	63 L
Drum opening	260 mm
Drum speed	27.5 rpm
Drum swing height	620 mm
Protection category	IP44D

LOGISTICAL DATA

Weight net / gross	25 / 28 kg
Packaging dimensions	670 x 600 x 400 mm
Item number	5908408904
EAN	4046664123149
20 containers	135 pcs.
40 containers	285 pcs.
40 HQ containers	342 pcs.

220 W



230 V connection



Robust



Transportable



APPLICATION EXAMPLES




Garden



Yard




Construction site

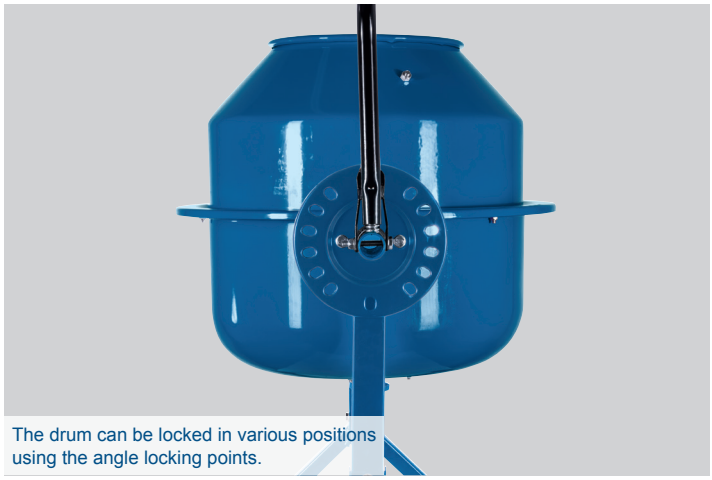

The drum can be locked in various positions using the angle locking points.



Easy transport thanks to wide wheelbase and stable wheels.

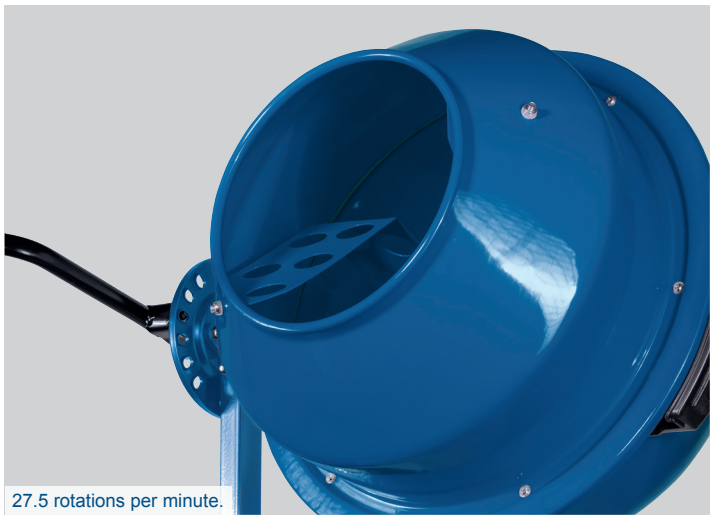

27.5 rotations per minute.




Capacity 63 L / 55 kg.

UNIVERSAL APPLICATION



Concrete

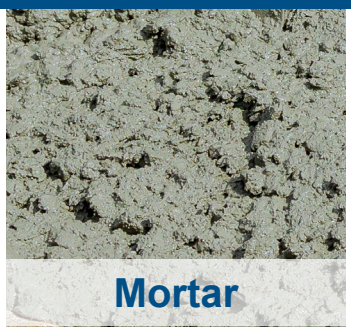

Mortar



Filler



Seeds

04/2026 Technical modifications and errors reserved.

scheppach Germany

125 L CONCRETE MIXER

MIX125



360°

PRODUCT DATA

Dimensions L x W x H	1200 x 710 x 1400 mm
Engine	230 V~
Rated output	550 W
Drum volume	125 L
Drum opening	385 mm
Drum speed	26.6 rpm
Drum swing height	890 mm
Protection category	IP45D

LOGISTICAL DATA

Weight net / gross	45 / 48 kg
Packaging dimensions	770 x 700 x 450 mm
Item number	5908403901
EAN	4046664022954
20 containers	120 pcs.
40 containers	253 pcs.
40 HQ containers	303 pcs.

550 W motor

230 V connection

Filling quantity max. 125 litres

Transportable

APPLICATION EXAMPLES



Garden



Yard



Construction site



Large handwheel allows easy adjustment of the drum. It can also be locked at different angles.



Easy transport thanks to wide wheelbase and stable wheels.



Cast iron gear ring ensures long service life.



Large 385 mm drum opening ensures easy filling and emptying of the mix.




Sturdy agitator paddles.

UNIVERSAL APPLICATION



Concrete

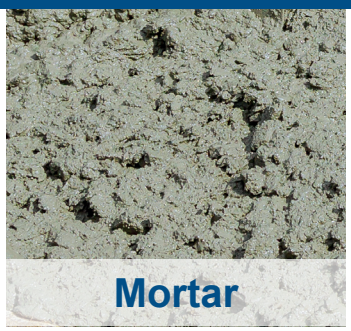

Mortar



Filler



Seeds

04/2026 Technical modifications and errors reserved.

scheppach Germany

140 L CONCRETE MIXER

MIX140



360°

PRODUCT DATA

Dimensions L x W x H	1210 x 840 x 1280 mm
Engine	230 V~
Rated output	550 W
Drum volume	140 L
Drum opening	385 mm
Drum speed	26.6 rpm
Drum swing height	890 mm
Protection category	IP45D

LOGISTICAL DATA

Weight net / gross	47 / 50 kg
Packaging dimensions	780 x 700 x 465 mm
Item number	5908404901
EAN	4046664036463
20 containers	120 pcs.
40 containers	253 pcs.
40 HQ containers	255 pcs.

550 W motor

230 V connection

Filling quantity max. 140 litres

Transportable

APPLICATION EXAMPLES



Garden



Yard



Construction site



Large handwheel allows easy adjustment of the drum. It can also be locked at different angles.



140 L drum capacity.



Cast iron gear ring ensures long service life.



Large 385 mm drum opening ensures easy filling and emptying of the mix.



Easy transport thanks to wide wheelbase and stable wheels.

UNIVERSAL APPLICATION



Concrete



Mortar



Filler



Seeds

04/2026 Technical modifications and errors reserved.

scheppach Germany

160 L CONCRETE MIXER

MIX160



360°

PRODUCT DATA

Dimensions L x W x H	1260 x 850 x 1350 mm
Engine	230 V~
Rated output	650 W
Drum volume	160 L
Drum opening	390 mm
Drum speed	29.5 rpm
Drum swing height	958 mm
Protection category	IP45D

LOGISTICAL DATA

Weight net / gross	53.8 / 57.7 kg
Packaging dimensions	760 x 740 x 515 mm
Item number	5908405901
EAN	4046664036470
20 containers	84 pcs.
40 containers	192 pcs.
40 HQ containers	237 pcs.

650 W motor

230 V connection

Filling quantity max. 160 litres

Transportable

APPLICATION EXAMPLES



Garden



Yard



Construction site



Large handwheel allows easy adjustment of the drum. It can also be locked at different angles.



Large 390 mm drum opening ensures easy filling and emptying of the mix.



Cast iron gear ring ensures long service life.



160 L drum capacity.



Easy transport thanks to wide wheelbase and stable wheels.

UNIVERSAL APPLICATION



Concrete



Mortar



Filler



Seeds

04/2026 Technical modifications and errors reserved.

scheppach Germany

180 L CONCRETE MIXER

MIX180



360°

PRODUCT DATA

Dimensions L x W x H	1260 x 850 x 1400 mm
Engine	230 V~
Rated output	800 W
Drum volume	180 L
Drum opening	390 mm
Drum speed	29.5 rpm
Drum swing height	958 mm
Protection category	IP45D

LOGISTICAL DATA

Weight net / gross	56.5 / 60 kg
Packaging dimensions	760 x 740 x 520 mm
Item number	5908406901
EAN	4046664036487
20 containers	84 pcs.
40 containers	192 pcs.
40 HQ containers	237 pcs.

800 W motor

230 V connection

Filling quantity max. 180 litres

Transportable

APPLICATION EXAMPLES



Garden



Yard



Construction site



Large handwheel allows easy adjustment of the drum. It can also be locked at different angles.



Large 390 mm drum opening ensures easy filling and emptying of the mix.



Easy transport thanks to wide wheelbase and stable wheels.



180 L drum capacity.



Cast iron gear ring ensures long service life.



Labyrinth housing protects from water splashing and the dual fan but guarantees good engine cooling.

UNIVERSAL APPLICATION



Concrete



Mortar



Filler



Seeds

04/2026 Technical modifications and errors reserved.

scheppach Germany

COMPULSORY MIXER

CCM130



PRODUCT DATA	
Dimensions L x W x H	760 x 830 x 1158 mm
Engine	230 V~
Rated output	2000 W
Drum volume	120 L
Drum opening	27"
Drum speed	30 rpm
Protection category	IP44

LOGISTICAL DATA	
Weight net / gross	127 / 149 kg
Packaging dimensions	830 x 770 x 850 mm
Item number	5908409901
EAN	4046664121824
20 containers	42 pcs.
40 containers	84 pcs.
40 HQ containers	126 pcs.

2000 W motor

Robust

Low-maintenance

Transportable

APPLICATION EXAMPLES



Garden



Yard



Construction site



The outlet lever allows precise measuring out of the mix during emptying.



Easy and quick opening of the mix, thanks to tear-open feature on the lid.



Large 68.5 cm diameter drum, mixing capacity 120 L.



Foldable support allows emptying into buckets and mortar tubs.




Limit switch for additional safety.


UNIVERSAL APPLICATION



Concrete

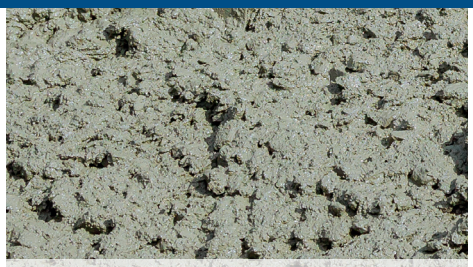

Mortar

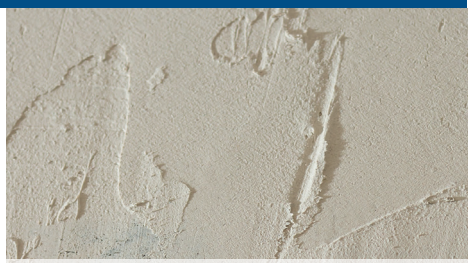

Filler



Seeds



Screed



Clay

04/2026 Technical modifications and errors reserved.

scheppach Germany

8.2 KN PLATE COMPACTOR

HP1400S




PRODUCT DATA

Dimensions L x W x H	1100 x 400 x 500 mm
Engine	2.0 hp, 4-stroke petrol engine
Power	79 cm^3
Fuel type	Petrol
Compaction pressure	8200 N
Compaction depth	20 cm
Vibrations	5900 vibration pulses/min
Plate size	495 x 320 mm
Forward speed	25 m/min
Max. angle of inclination	15°
CO_2 emissions	1016.4 g/kWh
Transport wheels	Yes

LOGISTICAL DATA

Weight net / gross	48 / 50 kg
Packaging dimensions	650 x 370 x 430 mm
Item number	5904615903
EAN	4014915230212
20 containers	216 pcs.
40 containers	432 pcs.
40 HQ containers	432 pcs.

4-stroke petrol engine, 2.0 hp



8200 N



20 cm




5900 vibration pulses/ min




25 m/min



495 x 320 mm



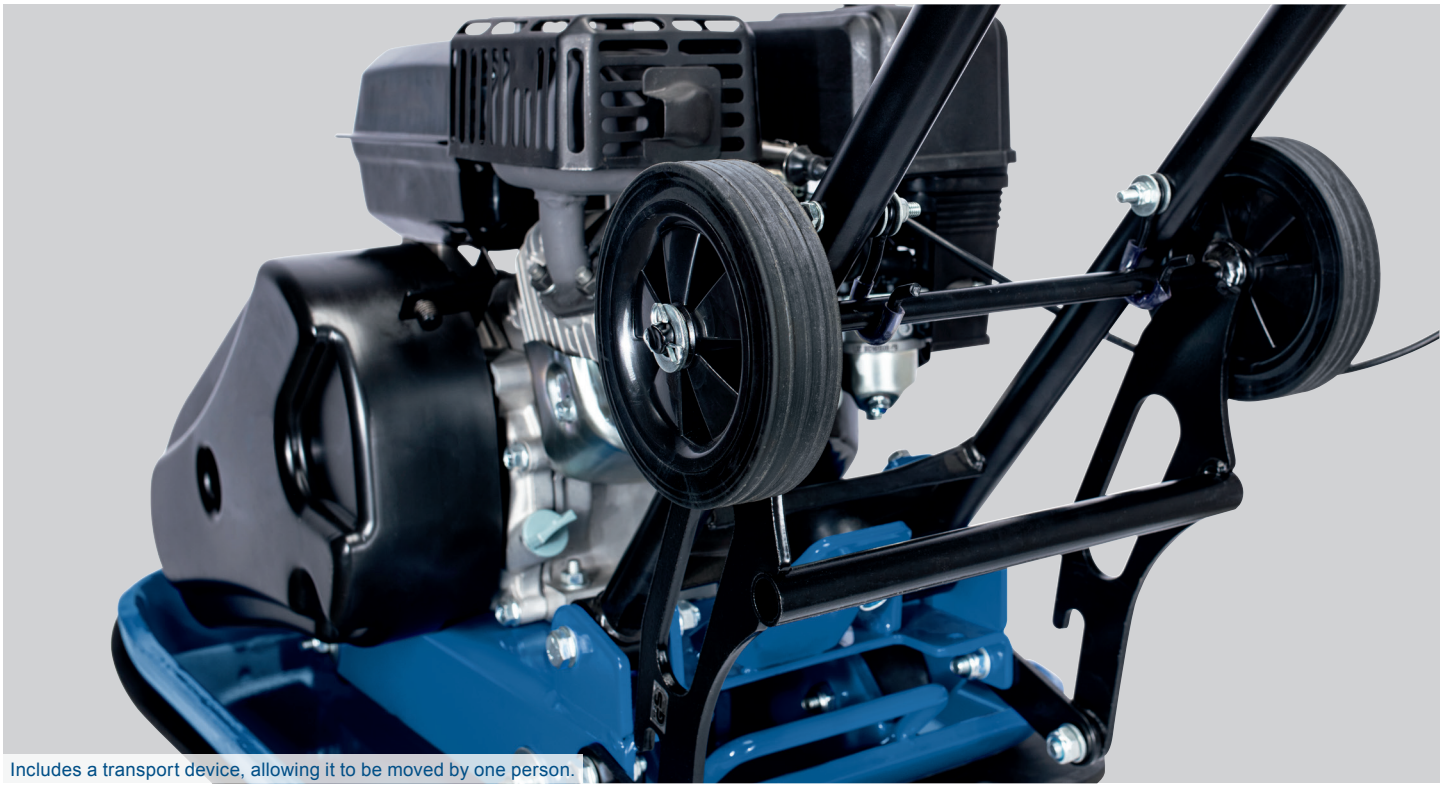

Includes a transport device, allowing it to be moved by one person.



Space-saving storage thanks to foldable guide bar.



Max. feed speed 25 m/min

SUITABLE FOR COMPACTING A WIDE VARIETY OF MATERIALS



Paving stones



Grit

04/2026 Technical modifications and errors reserved.

INCLUDING

- Black rubber mat
- Transport wheels

scheppach Germany

15 KN PLATE COMPACTOR

HP1200S




PRODUCT DATA

Dimensions L x W x H	1040 x 400 x 890 mm
Engine	5.6 hp, 4-stroke petrol engine
Power	196 cm^3
Fuel type	Petrol
Compaction pressure	15000 N
Compaction depth	25 cm
Vibrations	5700 vibration pulses/min
Plate size	450 x 350 mm
Forward speed	25 m/min
Max. angle of inclination	25°
CO_2 emissions	811.46 g/kWh
Transport wheels	Yes

LOGISTICAL DATA

Weight net / gross	58 / 60.5 kg
Packaging dimensions	570 x 380 x 670 mm
Item number	5904610903
EAN	4046664085614
20 containers	180 pcs.
40 containers	372 pcs.
40 HQ containers	372 pcs.

4-stroke petrol engine, 6.5 hp



15000 N



25 cm




5700 vibration pulses/ min




25 m/min



450 x 350 mm



SUITABLE FOR COMPACTING A WIDE VARIETY OF MATERIALS

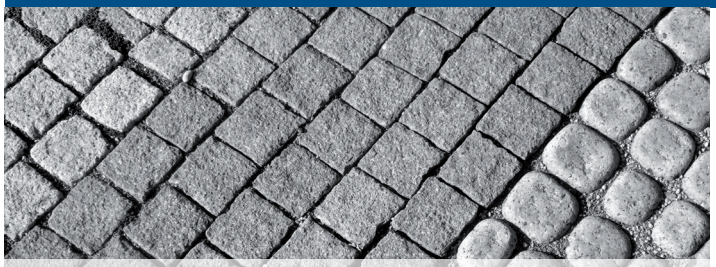

Paving stones



Grit



Compact design.



The HP1800s is suitable for compacting a wide variety of materials.



Includes a transport device, allowing it to be moved by one person.



Pull starter

04/2026 Technical modifications and errors reserved.

INCLUDING

- **Black rubber mat**
- **Transport wheels**

scheppach Germany

15 KN PLATE COMPACTOR

HP1800S




PRODUCT DATA

Dimensions L x W x H	1025 x 440 x 930 mm
Engine	5.6 hp, 4-stroke petrol engine
Power	196 cm^3
Fuel type	Petrol
Compaction pressure	23000 N
Compaction depth	30 cm
Vibrations	4200 vibration pulses/min
Plate size	544 x 440 mm
Forward speed	25 m/min
Max. angle of inclination	25°
CO_2 emissions	1016.4 g/kWh
Transport wheels	Yes

LOGISTICAL DATA

Weight net / gross	84 / 88.8 kg
Packaging dimensions	640 x 480 x 670 mm
Item number	5904611903
EAN	4046664085621
20 containers	126 pcs.
40 containers	252 pcs.
40 HQ containers	252 pcs.

4-stroke petrol engine, 5.6 hp



23000 N



30 cm




4200 vibration pulses/ min



25 m/min



544 x 440 mm





Compact design.



The HP1800s is suitable for compacting a wide variety of materials.



Includes a transport device, allowing it to be moved by one person.



Pull starter

SUITABLE FOR COMPACTING A WIDE VARIETY OF MATERIALS



Paving stones



Grit



Soil

04/2026 Technical modifications and errors reserved.

INCLUDING

- Black rubber mat
- Transport wheels

scheppach Germany

11 KN PLATE COMPACTOR

HP1900S




PRODUCT DATA

Dimensions L x W x H	1140 x 410 x 840 mm
Engine	5.6 hp, 4-stroke petrol engine
Power	196 cm^3
Fuel type	Petrol
Compaction pressure	11000 N
Compaction depth	25 cm
Vibrations	5500 vibration pulses/min
Plate size	530 x 350 mm
Forward speed	25 m/min
Max. angle of inclination	15°
CO_2 emissions	925.8 g/kWh
Transport wheels	Yes

LOGISTICAL DATA

Weight net / gross	57 / 60.3 kg
Packaging dimensions	710 x 400 x 505 mm
Item number	5904616903
EAN	4046664144175
20 containers	176 pcs.
40 containers	352 pcs.
40 HQ containers	352 pcs.

4-stroke petrol engine, 5.6 hp



11000 N



25 cm




5500 vibration pulses/ min



25 m/min



530 x 350 mm




SUITABLE FOR COMPACTING A WIDE VARIETY OF MATERIALS



Paving stones



Grit

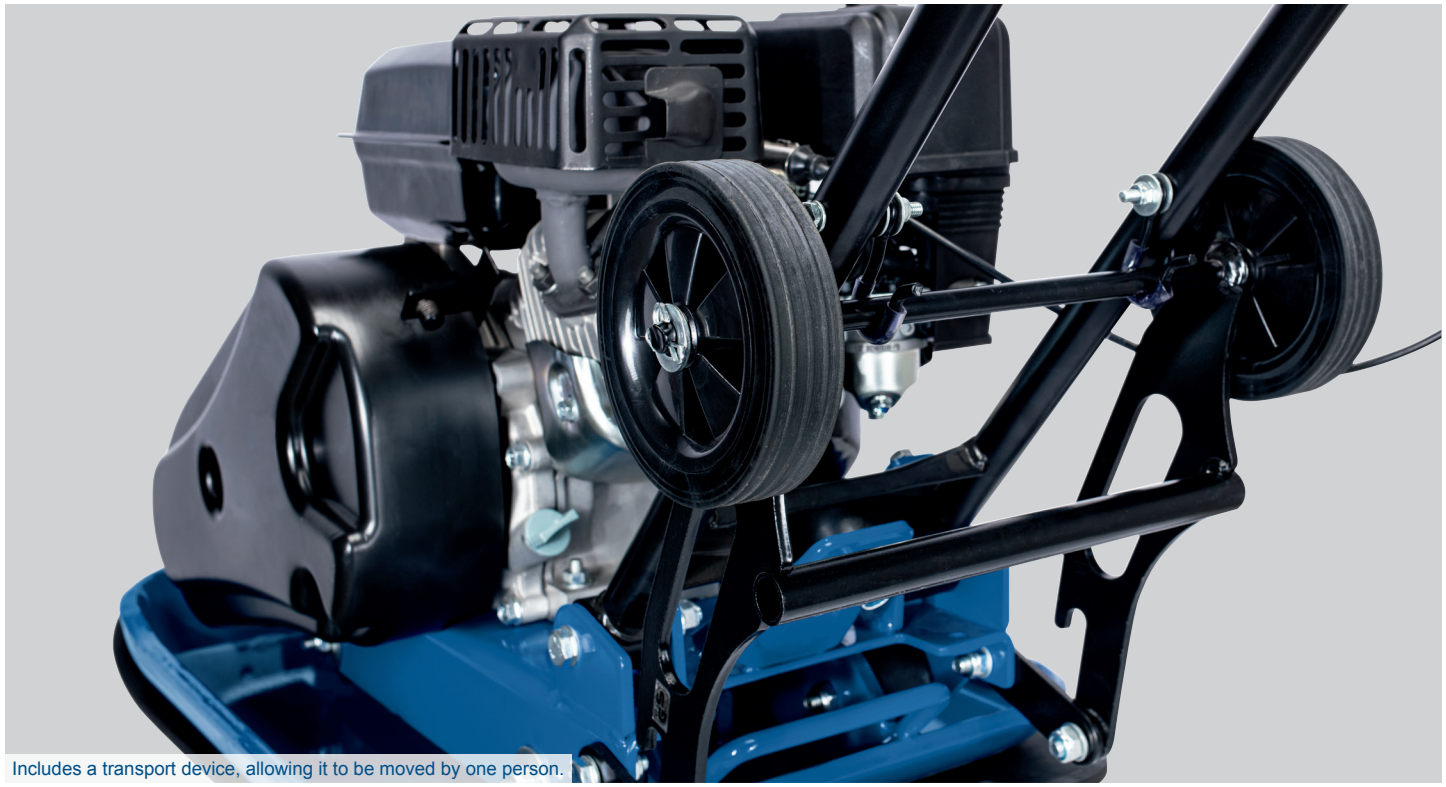

Includes a transport device, allowing it to be moved by one person.



Space-saving storage thanks to foldable guide bar.



Max. feed speed 25 m/min

04/2026 Technical modifications and errors reserved.

INCLUDING


- **Black rubber mat**
- **Transport wheels**

scheppach Germany

25 KN PLATE COMPACTOR

HP2200S



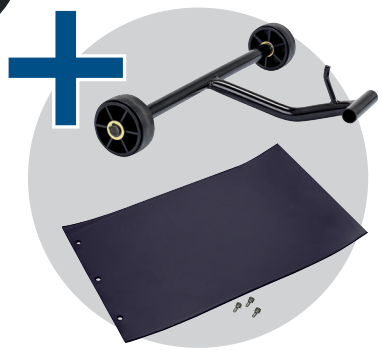


PRODUCT DATA

Dimensions L x W x H	1025 x 440 x 930 mm
Engine	6.5 hp, 4-stroke petrol engine
Power	196 cm^3
Fuel type	Petrol
Compaction pressure	25000 N
Compaction depth	35 cm
Vibrations	4200 vibration pulses/min
Plate size	550 x 440 mm
Forward speed	18 m/min
Max. angle of inclination	25°
CO_2 emissions	1016.4 g/kWh
Transport wheels	Yes

LOGISTICAL DATA

Weight net / gross	97.5 / 104 kg
Packaging dimensions	640 x 480 x 670 mm
Item number	5904612903
EAN	4046664085638
20 containers	126 pcs.
40 containers	235 pcs.
40 HQ containers	235 pcs.

4-stroke petrol engine, 6.5 hp



25000 N



35 cm




4200 vibration pulses/ min



18 m/min



550 x 440 mm





Compaction using a plate compactor prevents the subsoil from subsiding.



The HP2200s is also suitable for compacting different materials.

SUITABLE FOR COMPACTING A WIDE VARIETY OF MATERIALS



Paving stones



Grit



Soil

04/2026 Technical modifications and errors reserved.

INCLUDING

- Black rubber mat
- Transport wheels

scheppach Germany

13 KN PLATE COMPACTOR

HP2300S




PRODUCT DATA

Dimensions L x W x H	1140 x 400 x 840 mm
Engine	5.6 hp, 4-stroke petrol engine
Power	196 cm^3
Fuel type	Petrol
Compaction pressure	13000 N
Compaction depth	30 cm
Vibrations	5000 vibration pulses/min
Plate size	540 x 420 mm
Forward speed	15 m/min
Max. angle of inclination	15°
CO_2 emissions	925.8 g/kWh
Transport wheels	Yes

LOGISTICAL DATA

Weight net / gross	83 / 84.5 kg
Packaging dimensions	705 x 435 x 500 mm
Item number	5904617903
EAN	4046664144199
20 containers	156 pcs.
40 containers	312 pcs.
40 HQ containers	312 pcs.

4-stroke petrol engine, 5.6 hp



13000 N



30 cm




5000 vibration pulses/ min



15 m/min



540 x 420 mm





The HP2300s is suitable for compacting a wide variety of materials.



Includes black rubber mat for paving work.



Vibration-protected, foldable handle.



Includes a transport device, allowing it to be moved by one person.

SUITABLE FOR COMPACTING A WIDE VARIETY OF MATERIALS



Paving stones



Grit



Soil

04/2026 Technical modifications and errors reserved.

INCLUDING

- Black rubber mat
- Transport wheels

scheppach Germany

28 KN PLATE COMPACTOR

HP2500S






PRODUCT DATA

Dimensions L x W x H	1150 x 690 x 870 mm
Engine	6.5 hp, 4-stroke petrol engine
Power	196 cm^3
Fuel type	Petrol
Compaction pressure	28000 N
Compaction depth	40 cm
Vibrations	4300 vibration pulses/min
Plate size	630 x 400 mm
Forward/reverse speed	15 m/min
Max. angle of inclination	25°
CO_2 emissions	811.46 g/kWh
Transport wheels	Yes

LOGISTICAL DATA

Weight net / gross	125 / 135 kg
Packaging dimensions	710 x 430 x 1000 mm
Item number	5904613903
EAN	4046664085645
20 containers	84 pcs.
40 containers	172 pcs.
40 HQ containers	172 pcs.

4-stroke petrol engine, 6.5 hp



28000 N



40 cm




4300 vibration pulses/ min



15 m/min



630 x 400 mm





The HP2500s is also suitable for compacting different materials.



Thanks to the rubber mat, even paving work can be carried out.

SUITABLE FOR COMPACTING A WIDE VARIETY OF MATERIALS



Paving stones



Grit



Soil

04/2026 Technical modifications and errors reserved.

INCLUDING

- Black rubber mat
- Transport wheels

scheppach Germany

30.5 KN PLATE COMPACTOR

HP3000S




PRODUCT DATA

Dimensions L x W x H	1400 x 600 x 850 mm
Engine	8.2 hp, 4-stroke petrol engine
Power	270 cm^3
Fuel type	Petrol
Compaction pressure	30500 N
Compaction depth	50 cm
Vibrations	4020 vibration pulses/min
Plate size	730 x 450 mm
Forward/reverse speed	25 m/min / 15 m/min
Max. angle of inclination	20°
CO_2 emissions	837.19 g/kWh
Transport wheels	Yes

LOGISTICAL DATA

Weight net / gross	158 / 172 kg
Packaging dimensions	780 x 490 x 1110 mm
Item number	5904605903
EAN	4046664026891
20 containers	72 pcs.
40 containers	138 pcs.
40 HQ containers	138 pcs.

4-stroke petrol engine, 8.2 hp



30500 N



50 cm




4020 vibration pulses/ min



25 m/min



730 x 450 mm





The HP3000s is also suitable for compacting different materials.



The plate compactor can be manoeuvred forwards and backwards.



Thanks to the rubber mat, even paving work can be carried out.



Convenient operation of the plate compactor.

SUITABLE FOR COMPACTING A WIDE VARIETY OF MATERIALS



Paving stones



Grit



Soil

04/2026 Technical modifications and errors reserved.

INCLUDING

- Black rubber mat
- Transport wheels

scheppach Germany

TAMPER

VS1000




PRODUCT DATA

Dimensions L x W x H	780 x 480 x 1150 mm
Engine	4-stroke petrol engine
Power	5.6 PS
Fuel type	Petrol
Compaction pressure	10000 N
Vibrations	450 – 650/min
Plate size	345 x 285 mm
Lifting height	40 – 60 mm
CO^2 output	811.46 g/kWh
Transport wheels	Yes

LOGISTICAL DATA

Weight net / gross	78 / 88 kg
Packaging dimensions	570 x 510 x 990 mm
Item number	3908301915
EAN	4046664012993
20 containers	88 pcs.
40 containers	184 pcs.
40 HQ containers	184 pcs.

4-stroke petrol engine 5.6 PS




10000 N



450 – 650/min



345 x 285 mm



40 – 60 mm





The VS1000 is ideally suited for many uses.




Excellent running characteristics and handling.


Wheels for easy and quick transport.

UNIVERSAL APPLICATION


Soil

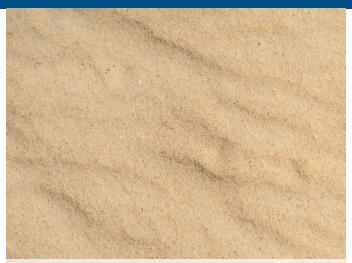
Sand


Grit


Gravel

04/2026 Technical modifications and errors reserved.


scheppach Germany

EARTH AUGER INCL. 3 DRILL BITS

EB2000



Click here for optional accessories

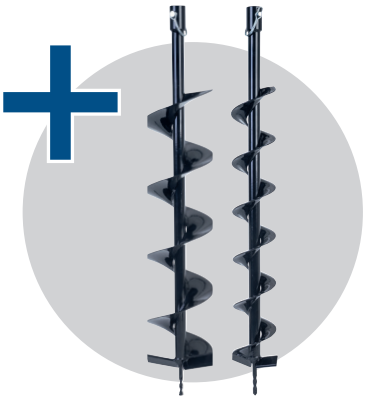

PRODUCT DATA

Dimensions L x W x H	540 x 310 x 1120 mm
Engine	2-stroke petrol engine
Power	1.4 kW / 1.9 PS
Fuel type	Petrol
Mixing ratio	1:40
Drill speed	370 rpm
Drill Ø	100, 150, 200 mm
Drill length	800 mm
Torque	67.3 Nm
CO^2 output	830.2 g/kWh

LOGISTICAL DATA

Weight net / gross	17 / 21 kg
Packaging dimensions	825 x 560 x 320 mm
Item number	5904704903
EAN	4046664156673
20 containers	196 pcs.
40 containers	399 pcs.
40 HQ containers	456 pcs.

100, 150, 200 mm



800 mm




APPLICATION EXAMPLES



Garden



Construction site

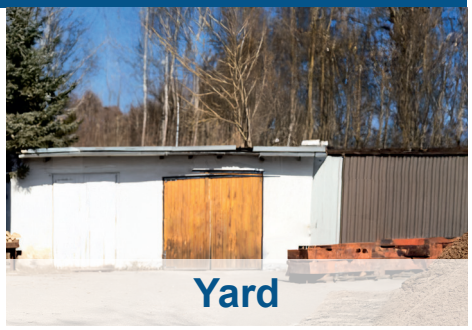

Yard

UNIVERSAL APPLICATION



Trees



Foundations



Seedlings



Fence posts




Precise working thanks to gas control lever and locking lever.



Ergonomic handles for safe working.



Easy maintenance of the air filter.

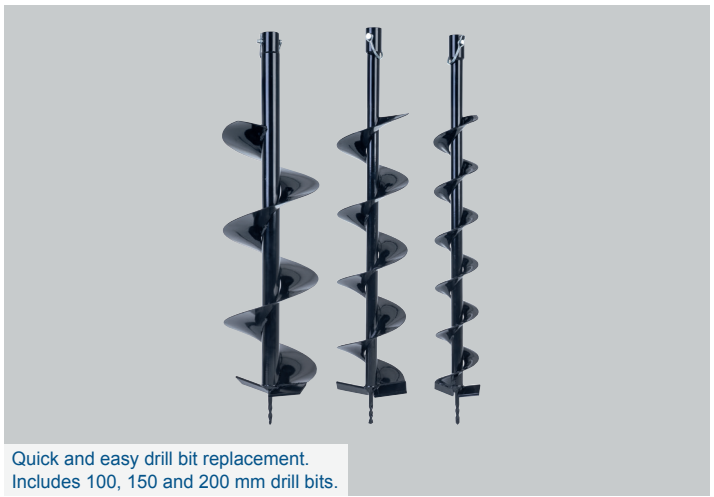

Quick and easy drill bit replacement.
Includes 100, 150 and 200 mm drill bits.

04/2026 Technical modifications and errors reserved.

INCLUDING

- 100 mm drill bit
- 150 mm drill bit
- 200 mm drill bit

scheppach
Germany

300 KG DUMPER

DP3000



PRODUCT DATA

Dimensions L x W x H	1380 x 760 x 1000 mm
Engine	Single cylinder; 4-stroke petrol engine
Power	5.6 PS / 196 cm³
Fuel type	Petrol
Payload	300 kg
Tipping system	by hand
Tipping container dimensions	910 x 650 x 575 mm
Tipping container volume	125 L
Type	All-wheel drive
Track width	760 mm
Climbing ability	20°
Start system	Cable pull
Driving speed	2.5 / 4.8 / 6.4 km/h
CO^2 output	811.46 g/kWh

LOGISTICAL DATA

Weight net / gross	143 / 167 kg
Packaging dimensions	1150 x 735 x 850 mm
Item number	5908802903
EAN	4046664037989
20 containers	30 pcs.
40 containers	64 pcs.
40 HQ containers	96 pcs.

4-stroke petrol engine

196 cm³

300 kg

910 x 650 x 575 mm

760 mm

All-wheel drive

4x4



The Dumper 3000 is ideal for loose and solid transported materials.



Easy manual emptying of the skip.



Maximum load capacity 300 kg



Air-filled off-road tyres and four-wheel drive for maximum grip.

SUITABLE FOR DIFFERENT MATERIALS


Gravel


Wood


Soil


Stone


Concrete


Bagged goods

04/2026 Technical modifications and errors reserved.

scheppach Germany

300 KG TRACK DUMPER

DP4500



PRODUCT DATA

Dimensions L x W x H	1530 x 710 x 1050 mm
Engine	Single cylinder; 4-stroke petrol engine
Power	5.6 PS / 196 cm^3
Fuel type	Petrol
Payload	300 kg
Tipping system	by hand
Tipping container dimensions	840 x 626 x 289 mm
Tipping container volume	115.8 L
Type	Chain drive
Track width	710 mm
Climbing ability	30°
Start system	Cable pull
Driving speed	1.57 / 2.93 / 3.66 km/h
CO^2 output	811.46 g/kWh

LOGISTICAL DATA

Weight net / gross	176 / 214 kg
Packaging dimensions	1540 x 755 x 1110 mm
Item number	5908805904
EAN	4046664134336
20 containers	20 pcs.
40 containers	44 pcs.
40 HQ containers	44 pcs.

4-stroke petrol engine | 196 cm^3 | 300 kg | 840 x 626 x 289 mm | 710 mm | Chain drive





Easy control of the DP4500 via a handy control element.



Gearbox with three forward gears and one reverse gear.



Chain drive for good grip on slippery, smooth and muddy surfaces.

SUITABLE FOR DIFFERENT MATERIALS



Gravel



Wood



Soil



Stone



Concrete



Bagged goods

04/2026 Technical modifications and errors reserved.

scheppach Germany

500 KG TRACK DUMPER

DP5000



PRODUCT DATA

Dimensions L x W x H	1600 x 715 x 1030 mm
Engine	Single cylinder; 4-stroke petrol engine
Power	5.6 PS / 196 cm^3
Fuel type	Petrol
Payload	500 kg
Tipping system	Hydraulics
Tipping container dimensions	950 x 680 x 465 mm
Tipping container volume	300 L
Type	Chain drive
Track width	715 mm
Climbing ability	20°
Start system	Cable pull
Driving speed	1.57 / 2.93 / 3.66 km/h
CO^2 output	811.46 g/kWh

LOGISTICAL DATA

Weight net / gross	255 / 290 kg
Packaging dimensions	1675 x 775 x 1115 mm
Item number	5908801903
EAN	4046664026464
20 containers	20 pcs.
40 containers	42 pcs.
40 HQ containers	42 pcs.

4-stroke petrol engine | 196 cm^3 | 500 kg | 950 x 680 x 465 mm | 715 mm | Chain drive



The bucket of the DP5000 can be emptied hydraulically.



Easy to manoeuvre, simple operation.



Thanks to the narrow clearance width of 715 mm, even areas with difficult access can be reached without problems.

SUITABLE FOR DIFFERENT MATERIALS


Gravel


Wood


Soil


Stone


Concrete


Bagged goods

04/2026 Technical modifications and errors reserved.

scheppach Germany

MINI EXCAVATOR

EXC815



LOGISTICAL DATA

Weight net / gross	567 / 639 kg
Packaging dimensions	2300 x 760 x 1300 mm
Item number	5915001903
EAN	4046664249177
20 containers	7 pcs.
40 HQ containers	32 pcs.


PRODUCT DATA

Dimensions L x W x H	2210 x 690 x 1585 mm
Engine	4-stroke petrol engine
Power	306 cm³ / 8.5 PS / 6.3 kW
Fuel type	Petrol / 6 L
Hydraulic system	2x 8.3 L/min / 12 L
Additional control circuit	No
Maximum digging depth	1200 mm
Maximum reach	2330 mm
Max. ejection height	2100 mm
Maximum loading height	1350 mm

PRODUCT DATA

Bucket width	290 mm
Bucket volume	0.011 m³
Bucket digging force	8.8 kN (815 kg)
Arm digging force	4.2 kN (485 kg)
Track width	690 mm
Chain width	150 mm
Swing range of boom	+/- 70°
Driving speed	1.7 km/h
Rotation range/speed	360° / 9.3 rpm
Climbing ability	15°
Ground pressure	26.5 kPa (0.27 kg/cm³)
E-start	Yes
LED	Yes
CO_2 emissions	788.20 g/kWh

4-stroke petrol engine
306 cm³ / 8.5 hp / 6.3 kW




max. 1.7 km/h



290 mm



max. 15°



690 mm



Rotation range 360°





Climbing ability max. 15°



Thanks to the extensive digging reach of max. 2,330 mm, work can also be carried out on slopes or inclines.



Swing range of boom: +/- 70°



690 mm track width – ideal for narrow passages and for reaching areas that are difficult to access



Large dozer blade that can be lowered to support the boom or to move soil



ucket volume: 0.011 m³
Bucket width: 290 mm



LED lights on the boom ensure ideal visibility.



E-starter for easy start-up of the excavator.


04/2026 Technical modifications and errors reserved.

MINI EXCAVATOR

EXC1400



Click here for optional accessories

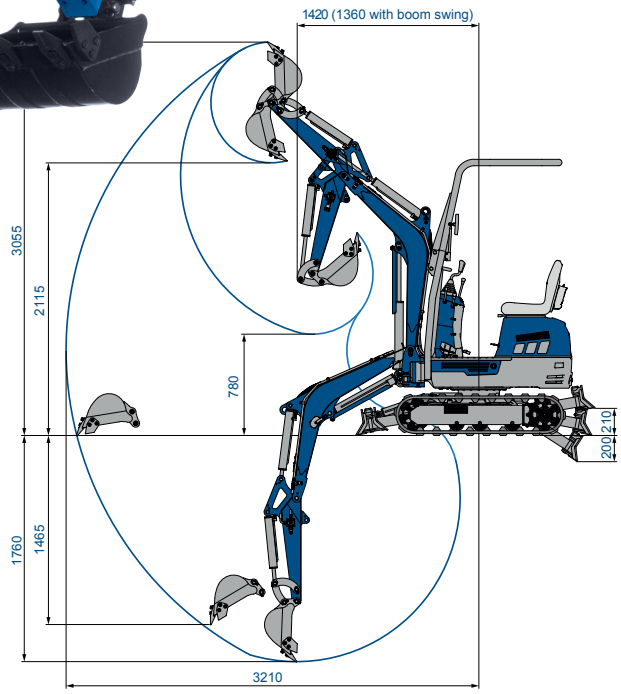

LOGISTICAL DATA

Weight net / gross	1010 / 1117 kg
Packaging dimensions	Packing unit 1: 2140 x 750 x 2300 mm Packing unit 2: 1110 x 740 x 1270 mm
Item number	5915003903
EAN	4046664294573
20 containers	tba
40 containers	tba
40 HQ containers	15 pcs.

PRODUCT DATA

Dimensions L x W x H (w/o. roof)	2,925 x 720 – 900 x 2,140 mm
Engine	4-stroke petrol engine
Power	420 cm³ / 11.5 PS / 8.5 kW
Fuel type	Petrol / 6L
Hydraulic system	Pump 2 x 13L/min / Tank 13.5 L
Additional control circuit	Yes
Maximum digging depth	1760 mm
Maximum reach	2925 mm
Max. ejection height	3055 mm
Maximum loading height	2115 mm

PRODUCT DATA

Bucket width	350 mm
Bucket volume	0.022 m³
Bucket digging force	13.2 kN (1346 kg)
Arm digging force	5.7 kN (581 kg)
Track width	720 - 900 mm
Chain width	180 mm
Swing range of boom	left 45°, right 85°
Driving speed	1.8 km/h
Rotation range/speed	360° / 8.8 rpm
Climbing ability	15°
Ground pressure	29 kPa (0.295 kg/cm²)
CO_2 emissions	734.5 g/kWh

4-stroke petrol engine 420 cm³ / 11.5 hp / 8.5 kW




Additional hydraulic circuit



720 - 900 mm



max. 15°



350 mm



left 45°, right 85°





Swivel range: boom to the left 45°, to the right 85°.


Large, lowerable dozer blade that can be adjusted to the track width for supporting the boom or moving earth.


Equipped as standard with a 350 mm wide bucket with a capacity of 0.022 m³.


Easy replacement of attachments thanks to the quick-change system.


Loading height: max. 2115 mm / Discharge height: max. 3055 mm / Digging depth: max. 1760 mm / Reach: max. 2925 mm.


Additional hydraulic circuit enables the attachment of versatile implements.


Extendable chassis from 720 to 900 mm for flexible adjustment to narrow spaces or stable positioning during excavator operation.

04/2026 Technical modifications and errors reserved.

INCLUDING

- **Bucket**

scheppach Germany

SKID STEER LOADER

MKL730

Click here for optional accessories




PRODUCT DATA

Dimensions L x W x H	1990 x 740 x 1200 mm
Engine	4-stroke petrol engine
Power	306 cm³ / 8.5 PS / 6.3 kW
Fuel type	Petrol
Hydraulic system	Pump 2 x 15 L/min/tank ca. 29 L
Additional control circuit	Yes
Bucket loading/unloading time	6.3 s / 4.25 s
Lifting arm lifting and lowering time	6.63 s / 4.42 s
Track width	740 mm
Chain width	180 mm
Driving speed	2.3 km/h (forwards/reverse)
Climbing ability	max. 25°
Ground pressure	32 kPa (0.32 kg/cm³)
Ground clearance	Middle: 114 mm / Side: 62 mm
E-start	Yes
LED	Yes
CO_2 emissions	788.2 g/kWh

LOGISTICAL DATA

Weight net / gross	805 / TBA (with bucket)
Packaging dimensions	TBA
Item number	5915401903
EAN	4046664279280
20 containers	11 pcs.
40 containers	23 pcs.
40 HQ containers	23 pcs.


4-stroke petrol engine
306 cm³ / 8.5 hp / 6.3 kW



max. 2.3 km/h



735 mm




max. 25°



740 mm



Max. tipping load 425 kg



*Measured without driver, on level ground and with bucket 7915400705.



740 mm track width – ideal for narrow passages and for reaching areas that are difficult to access



Powerful skid steer loader with a 200 kg load capacity for a wide range of tasks in the garden, on the building site or on the farm.



200 kg loading capacity for versatile work in a garden, yard or on a construction site



Operator platform with safety switch



Easy control of the compact loader via control lever.



Hydraulic quick-release fasteners allow easy replacement of the separately available attachments.



LED spotlight ensures the perfect view.

04/2026 Technical modifications and errors reserved.

PAINT AND MORTAR STIRRER

PM1200

2in1

- Mortar mixer
- Paint stirrer

Click here for optional accessories



PRODUCT DATA	
Dimensions L x W x H	315 x 200 x 860 mm
Mains voltage	220 – 240 V~
Power	1200 W
Speed	0 – 700 rpm
Tool receiver	M14
Mixing shaft Ø	120 mm
Mixing shaft length	K2: 580 mm; K5: 590 mm
Cable length	2 m

LOGISTICAL DATA	
Weight net / gross	5.7 / 6.6 kg
Packaging dimensions	345 x 230 x 290 mm
Item number	5907801901
EAN	4046664042198
20 containers	1120 pcs.
40 containers	2250 pcs.
40 HQ containers	2660 pcs.

1200 W | 220 – 240 V~ | 0 – 700 rpm | M14 | 590 mm | 580 mm



Adjustable speed regulation ensures mixing without splashing.



Thanks to its comprehensive accessories, the PM1200 is able to process paint, mortar and concrete.



Ergonomic handles for fatigue-free working.

UNIVERSAL USE




Concrete



Plaster



Mortar

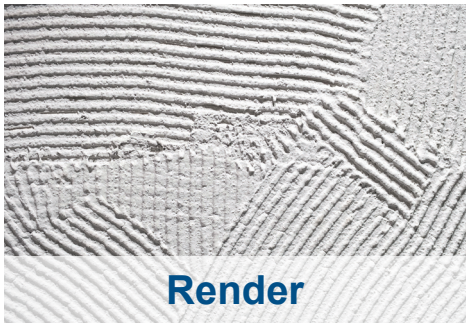

Render



Adhesive (tiles)



Paint

04/2026 Technical modifications and errors reserved.

INCLUDING

- Mortar mixer
- Paint stirrer

scheppach Germany

PAINT AND MORTAR STIRRER

PM1400

2in1

- Mortar mixer
- Paint stirrer

Click here for optional accessories



PRODUCT DATA	
Dimensions L x W x H	315 x 200 x 860 mm
Mains voltage	220 – 240 V~
Power	1400 W
Speed	0 – 760 rpm
Tool receiver	M14
Mixing shaft Ø	120 mm
Mixing shaft length	K2: 580 mm; K5: 590 mm
Cable length	2 m

LOGISTICAL DATA	
Weight net / gross	5.7 / 6.6 kg
Packaging dimensions	345 x 230 x 290 mm
Item number	5907805901
EAN	4046664043867
20 containers	1050 pcs.
40 containers	2150 pcs.
40 HQ containers	2550 pcs.

1400 W | 220 – 240 V~ | 0 – 760 rpm | M14 | 590 mm | 580 mm



Adjustable speed regulation ensures mixing without splashing.



Thanks to its comprehensive accessories, the PM1400 is able to process paint, mortar and concrete.



Ergonomic handles for fatigue-free working.

UNIVERSAL USE




Concrete




Plaster



Mortar

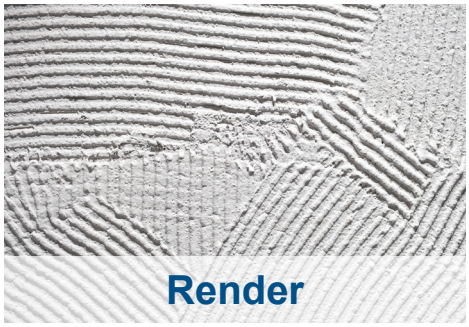

Render

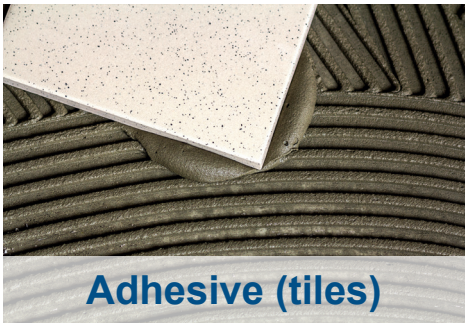

Adhesive (tiles)



Paint

04/2026 Technical modifications and errors reserved.

INCLUDING

- Mortar mixer
- Paint stirrer

scheppach Germany

PAINT AND MORTAR STIRRER

PM1600



Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	310 x 190 x 330 mm
Mains voltage	230 V~ / 50 Hz
Power	1600 W
Speed	0 - 580 / 0 - 780 min^{-1}
Tool receiver	M14
Mixing shaft Ø	140 mm
Mixing shaft length	590
Cable length	2.3 m

LOGISTICAL DATA

Weight net / gross	6.9 / 7.6 kg
Packaging dimensions	340 x 230 x 350 mm
Item number	5907803901
EAN	4046664043737
20 containers	910 pcs.
40 containers	1890 pcs.
40 HQ containers	2210 pcs.

1600 W | 230 V~ | 0 - 580 / 0 - 780 min^{-1} | M14 | 590 mm



Ergonomic handles for fatigue-free working.




Variable speed.



2-gear drive: 1st Gear 0–580 rpm, 2nd Gear 0 – 780 rpm


UNIVERSAL USE


Concrete


Plaster

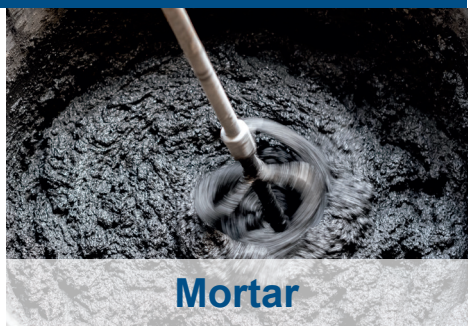
Mortar

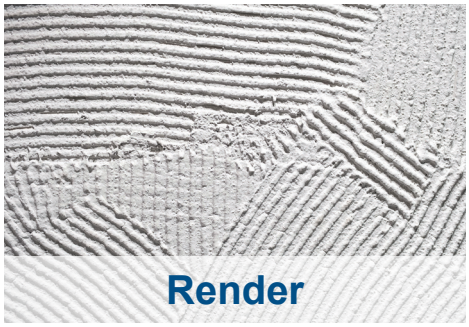
Render

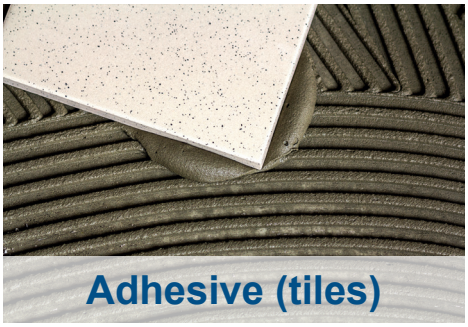
Adhesive (tiles)


Paint

04/2026 Technical modifications and errors reserved.

INCLUDING

- **Second, spiral mixing shaft attachment**

scheppach Germany

DOUBLE PAINT AND MORTAR STIRRER

PM1800D



Click here for optional accessories


PRODUCT DATA

Dimensions L x W x H	300 x 165 x 940 mm
Mains voltage	230V~ / 50/60 Hz
Power	1800 W
Speed	0 - 450 / 0 - 790 min^{-1}
Tool receiver	Quick-closure
Mixing shaft Ø	110 mm
Mixing shaft length	570 mm
Cable length	2 m

LOGISTICAL DATA

Weight net / gross	7.2 / 8.8 kg
Packaging dimensions	590 x 345 x 225 mm
Item number	5907807901
EAN	4046664292449
20 containers	520 pcs.
40 containers	1110 pcs.
40 HQ containers	1300 pcs.

1800 W



230 V~



0 - 450 / 0 - 790 min^{-1}





Quick-closure



570 mm





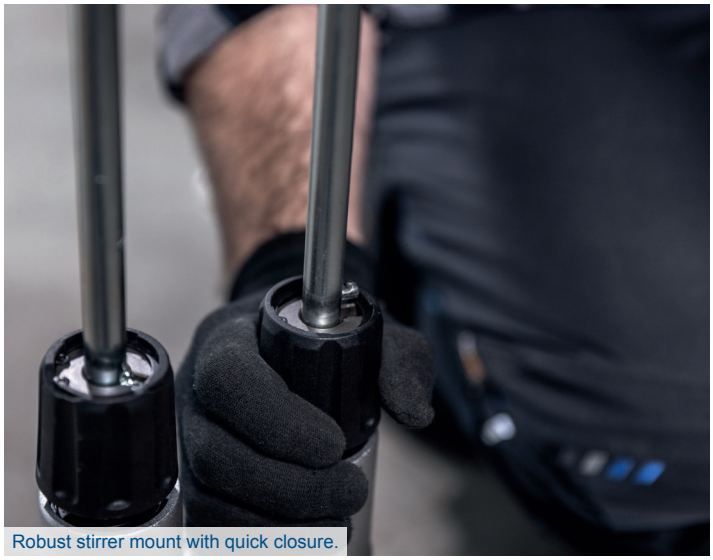

Robust stirrer mount with quick closure.



Optimum adjustment to the requirements thanks to a 2-speed gearbox.



Variable speed.



Adjustable speed regulation ensures mixing without splashing.



Ergonomic handles for fatigue-free working.

UNIVERSAL USE




Concrete




Plaster



Mortar

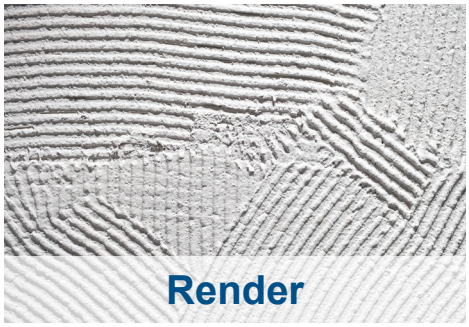

Render

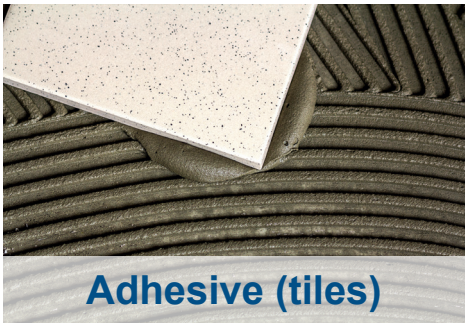

Adhesive (tiles)



Paint

04/2026 Technical modifications and errors reserved.

INCLUDING

- Two mixing rods

scheppach Germany

AIRLESS PAINT SPRAY SYSTEM

PTSA350


360°

Click here for optional accessories



PRODUCT DATA	
Dimensions L x W x H	245 x 195 x 255 mm
Mains voltage	220 – 240 V~ / 50 Hz
Power	650 – 750 W
Max. working pressure	207 bar
Max. flow rate	1.1 L/min
Max. area output	350 m²/h
Spraying hose length	7.6 m

LOGISTICAL DATA	
Weight net / gross	8.3 / 9.5 kg
Packaging dimensions	295 x 285 x 420 mm
Item number	5906002901
EAN	4046664073673
20 containers	810 pcs.
40 containers	1670 pcs.
40 HQ containers	1930 pcs.

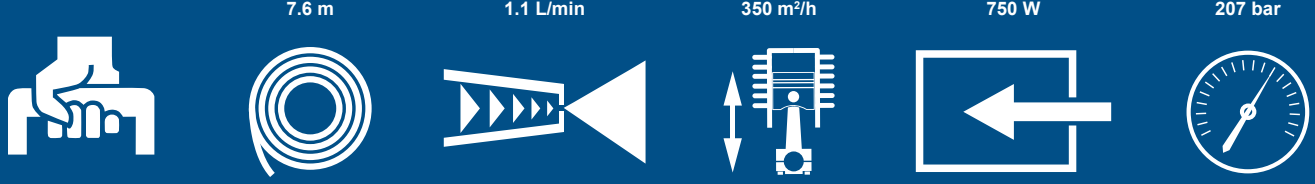



Spray gun with 4-finger trigger and lock-in function for continuous and fatigue-free working.



Can be drawn straight from the paint bucket thanks to the filter attachment on the suction hose.



Maximum working pressure of 207 bar, continuously adjustable.



Stepless pressure regulation.


UNIVERSAL APPLICATION



Glazing wood



Varnishing wood

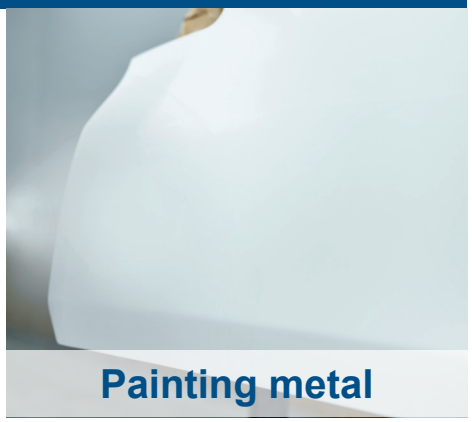

Painting metal



Interior painting



External restoration

04/2026 Technical modifications and errors reserved.

scheppach
Germany

AIRLESS PAINT SPRAY SYSTEM

PTSA600



Click here for optional accessories

OPTIONAL ACCESSORIES

- Extension - Article no: 7906000702
- Spray gun Pro – Article no.: 7906000710
- Airless nozzle
  311 – Article no.: 7906000707
  413 - Article no.: 7906000703
  517 – Article no.: 7906000706
  519 - Article no.: 7906000704
  521 – Article no.: 7906000705
- Airless hose
  7.6m - Article no.: 7906000709
  15m – Article no.: 7906000711

PRODUCT DATA

Dimensions L x W x H	350 x 300 x 410 mm
Mains voltage	230 V~ / 50 Hz
Power	950 W
Max. working pressure	227 bar
Max. flow rate	2.0 l/min
Max. area output	600 m²/h
Spraying hose length	15 m

LOGISTICAL DATA

Weight net / gross	10 / 11 kg
Packaging dimensions	390 x 315 x 435 mm
Item number	5906005901
EAN	4046664280071
20 containers	490 pcs.
40 containers	1010 pcs.
40 HQ containers	1210 pcs.

227 bar | 600 m²/h | 2.0 l/min | 15 m | 950 W | Transportable




Filter insert on the suction hose enables direct suction from the paint bucket.



Maximum working pressure of 227 bar – continuously adjustable using a pressure regulator.



Lock-in function for long and fatigue-free working.

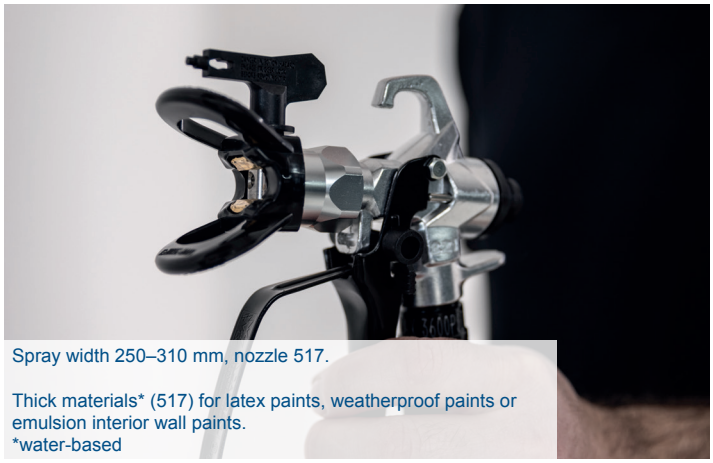

Spray width 250–310 mm, nozzle 517.

Thick materials* (517) for latex paints, weatherproof paints or emulsion interior wall paints.
*water-based



40 cm nozzle extension for high walls or for spraying the floor. (Special accessories)

APPLICATION EXAMPLES



Varnishing wooden furniture



Painting metal



Painting wood



Interior painting

04/2026 Technical modifications and errors reserved.

2800 W GENERATOR

SG3200X



PRODUCT DATA

Dimensions L x W x H	660 × 600 × 500 mm
Engine	Single cylinder, -4-stroke petrol motor
Power	5.8 hp
Fuel type	Petrol
Voltage regulation	AVR system
Rated voltage	230 V~
Rated/Max. / Peak Power	2500W / 2800W
Sockets	2 × 230 V~
Starter type	Pull starter
Parallel circuit	No
Overload protection	Yes
Oil monitor	Yes
Sound pressure level (LwA)	94.15 dB
CO^2 output	933.51 g/kWh

360°

LOGISTICAL DATA

Weight net / gross	44.7 / 47 kg
Packaging dimensions	685 x 490 x 495 mm
Item number	5906226903
EAN	4046664194668
20 containers	144 pcs.
40 containers	300 pcs.
40 HQ containers	375 pcs.

2 x 230 V~ sockets

Lasting

Robust

Powerful

Power pack

Fuel-saving



Integrated voltage meter, oil level warning (protects the motor from running dry) and overload protection (ensures the safety of the device)



2 x 230 volt sockets, max. power of 2800 watts.


Easy to manoeuvre, thanks to transport handles and large wheels.



Overload protection, voltage meter and oil level warning.



Ideal for mobile use.

04/2026 Technical modifications and errors reserved.

5500 W GENERATOR

SG7100X



PRODUCT DATA

Dimensions L x W x H	795 x 590 x 595 mm
Engine	Single cylinder, 4-stroke diesel motor
Power	12.2 hp
Fuel type	Petrol
Voltage regulation	AVR system
Rated voltage	230 V / 400 V
Rated/Max. / Peak Power	2200 W (230 V~) / 5500 W (400 V~) 2000 W (230 V~) / 5000 W (400 V~)
sockets	2 x 230 V~ / 1 x 400 V
Starter type	Electric start
Parallel circuit	No
Overload protection	Yes
Oil monitor	Yes
Sound pressure level (LwA)	95.8 dB
CO^2 output	777.93 g/kWh

360°

LOGISTICAL DATA

Weight net / gross	82 / 89 kg
Packaging dimensions	790 x 595 x 595 mm
Item number	5906229903
EAN	4046664194804
40 HQ containers	220 pcs.

1 x 400 V~ connection
1 x 12 V~ connection

2 x 230 V~ sockets

Oil warning indicator

Robust

Overload protection

Fuel-saving




Practical fuel gauge.



Fold-out transport handle.



Drive via a 420 cm.

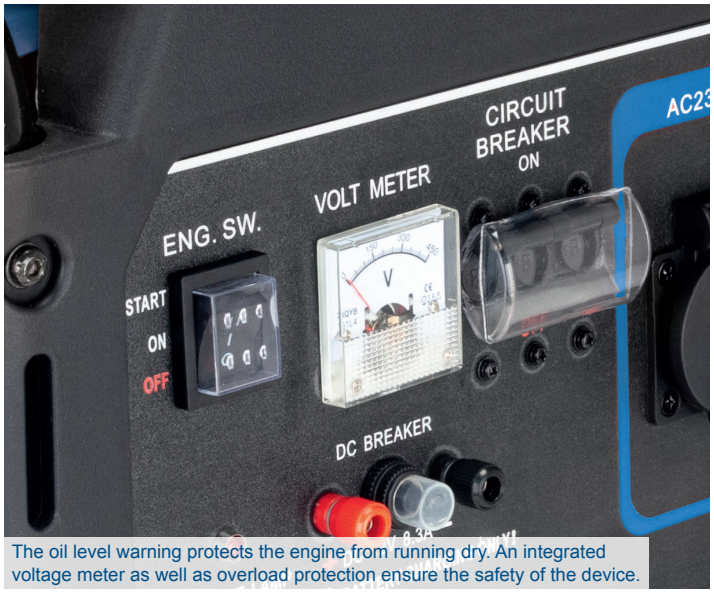

The oil level warning protects the engine from running dry. An integrated voltage meter as well as overload protection ensure the safety of the device.



Thanks to its wheels, the SG7100x can be transported easily.



Large tank volume of 25 L.

04/2026 Technical modifications and errors reserved.

5000 W DIESEL POWER GENERATOR

SG5200D



PRODUCT DATA

Dimensions L x W x H	930 x 515 x 710 mm
Engine	Single cylinder, 4-stroke diesel motor
Power	7.9 hp
Fuel type	Diesel
Voltage regulation	AVR system
Rated voltage	230 V / 400 V
Rated/Max. / Peak Power	3000 W (230 V~) / 4200 W (400 V~) 3300 W (230 V~) / 5000 W (400 V~)
sockets	2 × 230 V~ / 1 × 400 V
Starter type	Electric start
Parallel circuit	No
Overload protection	Yes
Oil monitor	Yes
Sound pressure level (LwA)	97dB(A)
CO^2 output	958.901 g/kWh


LOGISTICAL DATA

Weight net / gross	160 / 165 kg
Packaging dimensions	940 x 550 x 800 mm
Item number	5906241901
EAN	4046664300953
20 containers	72 pcs.
40 containers	144 pcs.
40 HQ containers	144 pcs.

1 x 12 V connection



2 x 230 V~ sockets
1 x 400 V~ power outlet



Oil warning indicator



Robust



Overload protection



Fuel-saving






Integrated voltage meter, oil level warning (protects the motor from running dry) and overload protection (ensures the safety of the device).




Two 230-volt sockets and a 12-volt connection enable flexible operation of various electrical consumers.




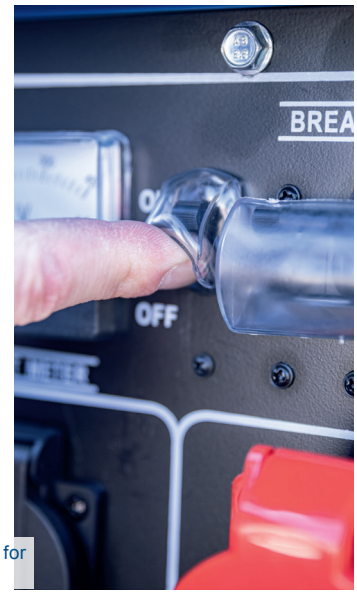

Integrated electric start with ignition lock for convenient and safe starting of the unit.

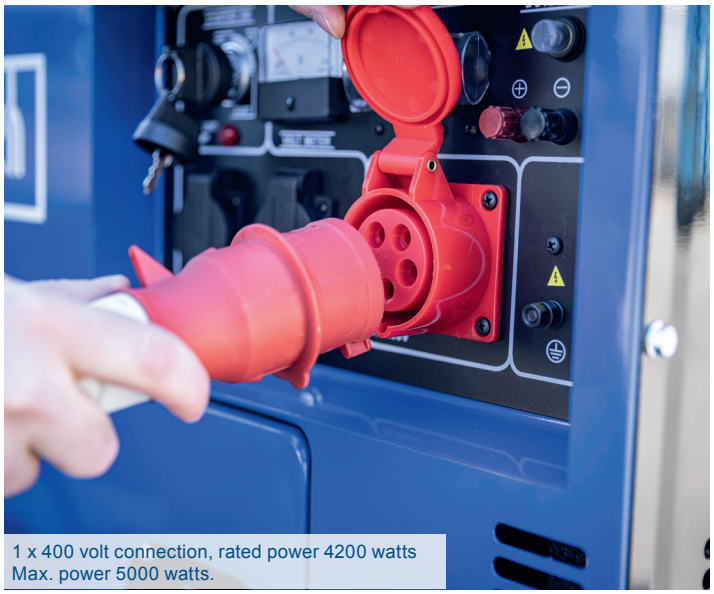

1 x 400 volt connection, rated power 4200 watts Max. power 5000 watts.

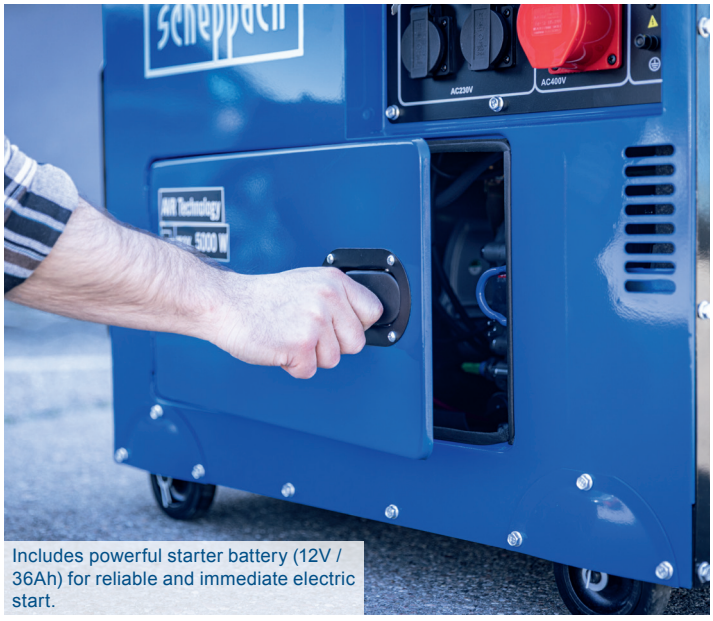

Includes powerful starter battery (12V / 36Ah) for reliable and immediate electric start.



Copper winding of the coil ensures a long service life, high efficiency and improved electrical conductivity.

04/2026 Technical modifications and errors reserved.

2000 W INVERTER GENERATOR

SG2500i




PRODUCT DATA

Dimensions L x W x H	520 x 270 x 440 mm
Engine	Single cylinder, 4-stroke petrol motor
Power	3 hp
Fuel type	Petrol
Voltage regulation	Inverter
Rated voltage	230 V~
Rated/Max. / Peak Power	1600 / 2000 W
Sockets	2x 230V, 1x USB-A, 1x USB-C
Starter type	Pull starter
Parallel circuit	No
Overload protection	Yes
Oil monitor	Yes
Sound pressure level (LwA)	71.74 dB
CO^2 output	874 g/kWh

LOGISTICAL DATA

Weight net / gross	18.5 / 20 kg
Packaging dimensions	511 × 330 × 487 mm
Item number	5906240903
EAN	4046664300786
20 containers	288 pcs.
40 containers	592 pcs.
40 HQ containers	740 pcs.

2x USB ports



2 x 230 V sockets



Oil warning indicator



Energy saving switch



Overload protection



Fuel-saving





User-friendly operation



Large 6.3 litre fuel tank



Transport handle



1600 W nominal power, 2000 W maximum power for devices with sensitive electronics, power tools, etc.



Rubber feet to protect against vibration



Easy start using pull starter

04/2026 Technical modifications and errors reserved.

Lightweight

Transportable

scheppach Germany

3500 W INVERTER GENERATOR

SG3500i



360°

PRODUCT DATA

Dimensions L x W x H	542 × 325 × 490 mm
Engine	Single cylinder, 4-stroke petrol motor
Power	3.6 kW / 4.8 PS
Fuel type	Petrol
Voltage regulation	Inverter technology
Rated voltage	230 V~
Rated/Max. / Peak Power	3000 / 3200 / 3500 W
Sockets	2× 230 V~, 1× 12 V, 2× USB-A
Starter type	Pull starter
Parallel circuit	Yes
Overload protection	Yes
Oil monitor	Yes
Sound pressure level (LwA)	66 dB
CO^2 output	889 g/kWh

LOGISTICAL DATA

Weight net / gross	22.5 / 24.2 kg
Packaging dimensions	590 × 370 × 355 mm
Item number	5906230903
EAN	4046664195221
20 containers	248 pcs.
40 containers	496 pcs.
40 HQ containers	615 pcs.

2x USB ports

2x 230 V sockets
1x 12 V socket

Oil warning indicator

Energy saving switch

ECO MODE

Overload protection

Fuel-saving



Large 6.3 litre fuel tank



Rubber feet to protect against vibration



Low noise level of 66 dB



User-friendly operation



3500 W peak output, 3200 W maximum output for devices with sensitive electronics, power tools etc.





Easy start using pull starter

04/2026 Technical modifications and errors reserved.

Lightweight

Transportable

scheppach Germany

6200 W INVERTER GENERATOR

SG7000i




PRODUCT DATA

Dimensions L x W x H	730 x 560 x 610 mm
Engine	4-stroke petrol engine
Power	6.8 kW / 9.2 PS
Fuel type	Petrol
Voltage regulation	Inverter technology
Rated voltage	230 V~
Nominal/peak power	6000 / 6200 W
sockets	2x 230 V 16 A, 1x 230 V CEE 32 A, 1x 12 V DC, 1x USB-A, 1x USB-C
Starter type	E-start function
Parallel circuit	No
Overload protection	Yes
Oil monitor	Yes
Sound pressure level (LwA)	64 dB
CO^2 output	820 g/kWh

LOGISTICAL DATA

Weight net / gross	60 / 65 kg
Packaging dimensions	730 x 560 x 610 mm
Item number	5906242903
EAN	4046664308911
20 containers	96 pcs.
40 containers	192 pcs.
40 HQ containers	256 pcs.

2x USB ports



2x 230 V sockets
1x 12 V socket



Oil warning indicator



Energy saving switch



Overload protection





The user-friendly LCD display allows you to conveniently read the operating hours counter.


Extendable handle and wheeled base for easy transport.



Easy starting thanks to the electric start function.



The CEE plug is designed for outdoor use, weatherproof and mechanically reverse-polarity protected, which increases safety during use.



Robust, impact-resistant plastic housing.

04/2026 Technical modifications and errors reserved.

BUILDING DRYER

BTR6500



PRODUCT DATA

Dimensions L x W x H	565 x 420 x 710 mm
Engine	230 V~
Rated output	1050 W
Max. room size	80 m²
Dehumidifying capacity	60 L per day
Air flow rate (m³/h)	350 m³/h
Air humidity	30% – 80% rH
Temperature range	5 – 35°C
Water tank volume	6.0 L
Automatic defrosting	Yes
Automatic cut-off	Yes
Sound power level (LwA)	55 – 60 dB(A)

LOGISTICAL DATA

Net weight	32 kg
Gross weight	30.1 kg (package 1) 5.3 kg (package 2)
Packaging dimensions	870 x 280 x 65 mm (package 1) 490 x 400 x 645 mm (package 2)
Item number	5906504812 (package 1) 5906504813 (package 2)
EAN	4046664257486 (package 1) 4046664257493 (package 2)
20 containers	301 pcs.
40 containers	630 pcs.
40 HQ containers	720 pcs.

Room area 60 – 80 m²

Auto stop



Extremely quiet operation 55 – 60 dB



Automatic self-de-icing < 11°C room temper-ature




Air throughput 350m³/h



Dehumidifying capacity 60 L per day



APPLICATION EXAMPLES

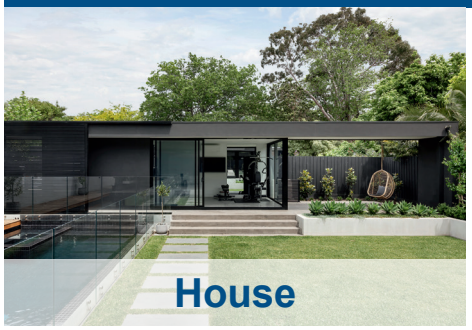







With a dehumidification capacity of 60 litres per day, the building dryer is ideal for larger rooms measuring 60 to 80 m².



Hose for self-draining.



The resulting condensation is collected in the large 6-litre collection bucket which automatically turns off.



Easy-to-read LCD display for convenient device settings, including operating hours counter.

04/2026 Technical modifications and errors reserved.

scheppach Germany

PORTABLE SUB-COMPACT COMPRESSOR

AIRFORCE 7 SC

Hybrid function

- 230 – 240 V~ power cable
- Cigarette lighter



Click here for optional accessories



PRODUCT DATA

Dimensions L x W x H	240 x 230 x 103 mm
Mains voltage	230 – 240 V~ / DC 12 V
Power	120 W / DC 100 W
Max. working pressure	8 bar
Suction capability	24 L/min
Cable length	AC Adapter 2 m / 12 V 4 m
Hose length	0.6 m
Design	oil-free
Sound power level (LwA)	92.5 dB


LOGISTICAL DATA

Weight net / gross	1.64 / 1.92 kg
Packaging dimensions	240 x 115 x 245 mm
Item number	5906191901
EAN	4046664286523
20 containers	3642 pcs.
40 containers	7540 pcs.
40 HQ containers	8840 pcs.

8 bar



24 L/min



0.6 m



230 V 2 m
12 V 4 m



Oil-free



UNIVERSAL USE



Car tyres



Cigarette lighter



Bicycle tyres



Sports goods



Air mattress



Digital display shows the current operating pressure.



Handy, portable compressor – ideal for the car or for inflating car tyres, bicycle tyres as well as toys and sporting equipment.



Sub-compact design – space-saving, lightweight and efficient construction – 70% smaller than standard models*.
*compared with Airforce 7



Cable and accessories can be stowed securely in the device to save space.

04/2026 Technical modifications and errors reserved.

INCLUDING

- 2x ball needle
- Conical adapter
- Tyre adapter

scheppach Germany

PORTABLE COMPRESSOR

AIRFORCE 7



Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	320 x 160 x 320 mm
Mains voltage	230 V~
Power	1100 W
Max. working pressure	8 bar
Suction capability	180 L/min
Cable length	4 m
Hose length	4 m
Design	oil-free
Sound power level (LwA)	97 dB

LOGISTICAL DATA

Weight net / gross	5.0 / 6.0 kg
Packaging dimensions	370 x 165 x 330 mm
Item number	5906168901
EAN	4046664243175
20 containers	Approx. 1200 pcs.
40 containers	Approx. 2460 pcs.
40 HQ containers	Approx. 2870 pcs.

8 bar | 180 L/min | 4 m | 4 m | Oil-free

UNIVERSAL USE



Car tyres



Blowing out



Bicycle tyres



Sports goods



Air mattress

Includes air pistol, tyre inflater and 3 adapters.



The AirForce 7 is the perfect compressor for at home or out and about.



Large working radius, thanks to 4 m compressed air hose and 4 m connection cable.



Cable and accessories can be stowed securely in the device to save space.



04/2026 Technical modifications and errors reserved.

INCLUDING


- Air pistol
- Tyre inflater
- 3x adapter

scheppach Germany

6 L COMPRESSOR

HC06

Click here for optional accessories

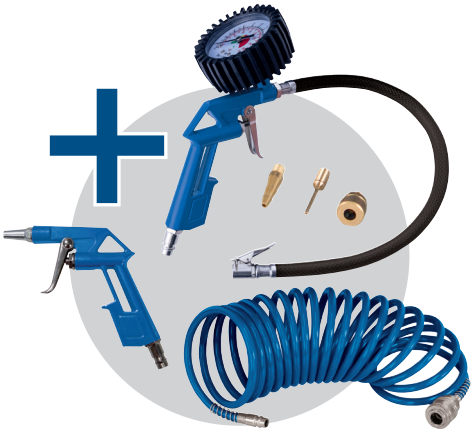



PRODUCT DATA

Dimensions L x W x H	350 x 324x 276 mm
Mains voltage	220 – 240 V~ / 50 Hz
Power	1200 W
Max. working pressure	8 bar
Suction capability	200 L/min
Boiler size	6 L
Number of cylinders	1 pcs.
Quick coupling	1 pcs.
Design	Oil-free
Sound power level (LwA)	97dB(A)

LOGISTICAL DATA

Weight net / gross	8.2 / 9.2 kg
Packaging dimensions	365 x 340 x 305 mm
Item number	5906153901
EAN	4046664174431
20 containers	578 pcs.
40 containers	1188 pcs.
40 HQ containers	1386 pcs.

8 bar | 200 L/min | 6 L | Oil-free | 1200 W

UNIVERSAL USE













Oil-free, low-maintenance compressor with a long service life.



The handle and light weight of 8.2 kg allow easy transport and mobile use.



The quick-coupling ensures fast and easy tool replacement.



Thanks to its compact size, the HC06 can be stored without using up much space.

04/2026 Technical modifications and errors reserved.

INCLUDING

- Air pistol
- Tyre inflater
- Compressed air hose
- 3x adapter

scheppach
Germany

24 L COMPRESSOR

HC30ox



Click here for optional accessories



Also available with accessories(Hc30o)

PRODUCT DATA

Dimensions L x W x H	550 x 280 x 565 mm
Mains voltage	230 V~ / 50 Hz
Power	1100 W
Max. working pressure	8 bar
Suction capability	200 L/min
Boiler size	24 L
Number of cylinders	1 pcs.
Quick coupling	1 pcs.
Design	Oil-free
Sound power level (LwA)	97 dB(A)

LOGISTICAL DATA

	hC30ox	HC30o
Weight net / gross	18.3 / 19.3 kg	18.3 / 20 kg
Packaging dimensions	335 x 325 x 975 mm	
Item number	5906146904	5906146901
EAN	4046664137795	4046664137788
20 containers	294 pcs.	
40 containers	588 pcs.	
40 HQ containers	588 pcs.	

8 bar | 200 L/min | 24 L | Oil-free | 1100 W




UNIVERSAL USE



Tyre inflation



Compressed air impact wrench

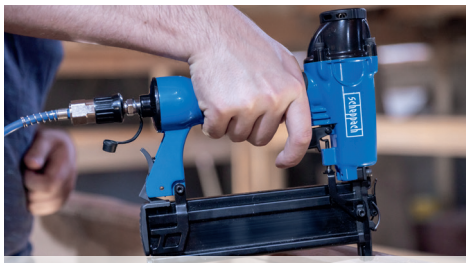

Nailing / tacking



Sports goods



Blowing out



5 m spiral compressed air hose.



Wheels for easy transport.



The pressure gauge allows the accumulator pressure to be read at any time.



Quick-connect coupling allows rapid tool replacement.

04/2026 Technical modifications and errors reserved.

INCLUDING

- Air pistol
- Tyre inflater
- Compressed air hose
- Various adapter
- Various nozzles

scheppach Germany

24 L COMPRESSOR

HC26



Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	560 x 310 x 570 mm
Mains voltage	230 V~ / 50 Hz
Power	1100 W
Max. working pressure	8 bar
Suction capability	220 L/min
Boiler size	24 L
Number of cylinders	1 pcs.
Quick coupling	1 pcs.
Design	Oil-lubricated
Sound power level (LwA)	93dB(A)

LOGISTICAL DATA

Weight net / gross	21 / 22.9 kg
Packaging dimensions	580 x 250 x 580 mm
Item number	5906135901
EAN	4046664072980
20 containers	340 pcs.
40 containers	720 pcs.
40 HQ containers	720 pcs.

8 bar | 220 L/min | 24 L | Oil-lubricated | 1100 W

UNIVERSAL USE



Tyre inflation



Compressed air ratchet




Nailing / tacking



Sports goods



Blowing out

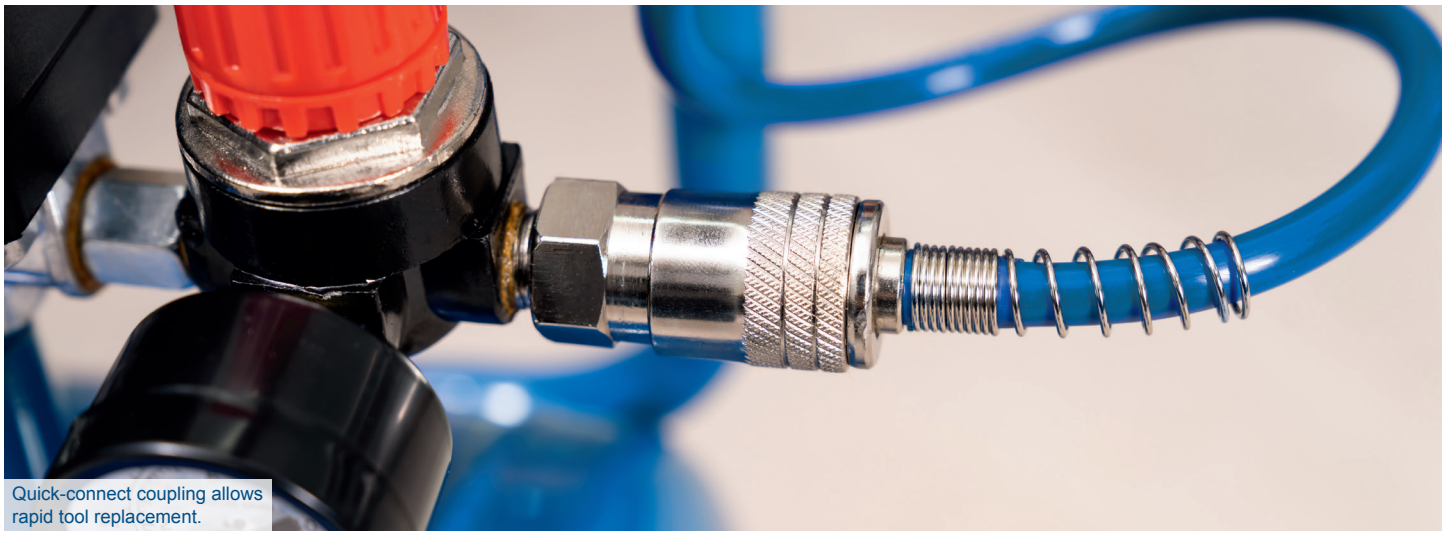

Quick-connect coupling allows rapid tool replacement.



The pressure gauge allows the accumulator pressure to be read at any time.

04/2026 Technical modifications and errors reserved.

50 L COMPRESSOR

HC70



Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	720 x 400 x 700 mm
Mains voltage	230 V~ / 50 Hz
Power	1500 W
Max. working pressure	8 bar
Suction capability	210 L/min
Boiler size	50 L
Number of cylinders	1 pcs.
Quick coupling	2 pcs.
Design	Oil-lubricated
Sound power level (LwA)	93dB(A)

LOGISTICAL DATA

Weight net / gross	28 / 30 kg
Packaging dimensions	785 x 335 x 770 mm
Item number	5906193901
EAN	4046664302391
20 containers	156 pcs.
40 containers	324 pcs.
40 HQ containers	420 pcs.

8 bar | 210 L/min | 20 L | Oil-lubricated | 1500 W



UNIVERSAL APPLICATION



Tyre inflation



Compressed air ratchet



Nailing / tacking



Sports goods



Bathroom goods



Universal use for work around the house, workshop or garage.



Wheels for easy transport.





Pressure regulator and pressure gauge ensure ideal control of the operating pressure.



Quick-coupling for rapid tool replacement.

04/2026 Technical modifications and errors reserved.

scheppach Germany

50 L COMPRESSOR

HC500



Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	740 x 420 x 720 mm
Mains voltage	230 V~
Power	2200 W
Max. working pressure	10 bar
Suction capability	412 L/min
Boiler size	50 L
Number of cylinders	2 pcs.
Quick coupling	2 pcs.
Design	Oil-lubricated
Sound power level (LwA)	97dB(A)

LOGISTICAL DATA

Weight net / gross	41.5 / 46 kg
Packaging dimensions	770 x 375 x 730 mm
Item number	5906158972
EAN	4046664211617
20 containers	135 pcs.
40 containers	270 pcs.
40 HQ containers	270 pcs.

10 bar | 412 L/min | 50 L | Oil-lubricated | 2200 W

UNIVERSAL USE



Nailing / tacking



Tyre inflation



Compressed air eccentric sander



Compressed air ratchet



Sandblasting gun



Compressed air impact wrench





Wheels for easy transport.



Quick-connect coupling allows rapid tool replacement.

04/2026 Technical modifications and errors reserved.

scheppach Germany

100 L COMPRESSOR

HC120DC

Click here for optional accessories



PRODUCT DATA

Dimensions L x W x H	1065 x 495 x 815 mm
Mains voltage	230 V~
Power	2200 W
Max. working pressure	10 bar
Suction capability	412 L/min
Boiler size	100 L
Number of cylinders	2 pcs.
Quick coupling	2 pcs.
Design	Oil-lubricated
Sound power level (LwA)	97dB(A)

LOGISTICAL DATA

Weight net / gross	58 / 64 kg
Packaging dimensions	1085 x 385 x 810 mm
Item number	5906120905
EAN	4046664093473
20 containers	60 pcs.
40 containers	126 pcs.
40 HQ containers	185 pcs.

10 bar | 412 L/min | 100 L | Dual cylinder | Oil-lubricated | 2200 W

UNIVERSAL USE



Nailing / tacking



Compressed air impact wrench



Tyre inflation



Compressed air ratchet



Compressed air eccentric sander



Sandblasting gun



Wheels for easy transport.





The pressure gauge allows the accumulator pressure to be read at any time.



Quick-connect coupling allows rapid tool replacement.

04/2026 Technical modifications and errors reserved.

100 L BELT-DRIVEN COMPRESSOR

HC550TC

Click here for optional accessories



PRODUCT DATA

Dimensions L x W x H	1025 x 475 x 840 mm	
Mains voltage	230 V~ / 50 Hz	400 V / 50 Hz
Power	2200 W	3000 W
Max. working pressure	10 bar	
Suction capability	550 L/min	
Boiler size	100 L	
Number of cylinders	3 pcs.	
Quick coupling	2 pcs.	
Design	Oil-lubricated	
Sound power level (LwA)	97dB(A)	

LOGISTICAL DATA

	230 V~	400 V~
Weight net / gross	80 / 85.6 kg	
Packaging dimensions	1090 x 420 x 840 mm	
Item number	5906147901	5906147902
EAN	4046664139423	4046664139416
20 containers	50 pcs.	
40 containers	110 pcs.	
40 HQ containers	162 pcs.	

10 bar | 550 L/min | 100 L | 3-cylinder | Oil-lubricated | 2200 W

UNIVERSAL USE




Nailing / tacking



Sandblasting gun



Compressed air eccentric sander

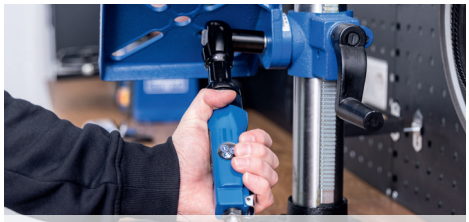

Compressed air ratchet



Compressed air chisel hammer



Compressed air impact wrench



Suitable for high demands, such as inflating lorry tyres.



3 cylinders for maximum air output.



Wheels and a transport handle allow quick transport and mobile use.



04/2026 Technical modifications and errors reserved.

scheppach Germany

30 L COMPRESSOR

HC35V



Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	350 x 375 x 730 mm
Mains voltage	230 V~ / 50 Hz
Power	1500 W
Max. working pressure	10 bar
Suction capability	180 L/min
Boiler size	30 L
Number of cylinders	1 pcs.
Quick coupling	1 pcs.
Design	Oil-free
Sound power level (LwA)	97dB(A)

LOGISTICAL DATA

Weight net / gross	17 / 18.8 kg
Packaging dimensions	345 x 325 x 830 mm
Item number	5906169901
EAN	4046664244660
20 containers	356 pcs.
40 containers	714 pcs.
40 HQ containers	824 pcs.

10 bar | 180 L/min | 30 L | Oil-free | 1500 W

UNIVERSAL USE



Tyre inflation



Compressed air ratchet



Nailing / tacking



Sports goods



Blowing out



Universal use for work around the house, workshop or garage.



Large wheels and ergonomic handle ensure easy transport.



Pressure gauge and regulator guarantee ideal control of the operating pressure.



2 quick-couplings allow rapid tool replacement.



Practical cable storage at the back of the housing.

04/2026 Technical modifications and errors reserved.

scheppach Germany

50 L COMPRESSOR

HC51V



Click here for optional accessories



Also available with accessories (5906125907)

PRODUCT DATA

Dimensions L x W x H	364 x 346 x 955 mm
Mains voltage	230 V~ / 50 Hz
Power	1500 W
Max. working pressure	10 bar
Suction capability	220 L/min
Boiler size	50 L
Number of cylinders	1 pcs.
Quick coupling	2 pcs.
Design	Oil-free
Sound power level (LwA)	97dB(A)

LOGISTICAL DATA

	Without accessories	With accessories
Weight net / gross	23.8 / 25.2 kg	23.5 / 24.5 kg
Packaging dimensions	335 x 325 x 975 mm	
Item number	5906125901	5906125907
EAN	4046664063674	4046664230526
20 containers	294 pcs.	
40 containers	588 pcs.	
40 HQ containers	588 pcs.	

10 bar | 220 L/min | 50 L | Oil-free | 1500 W




UNIVERSAL USE



Tyre inflation



Compressed air impact wrench

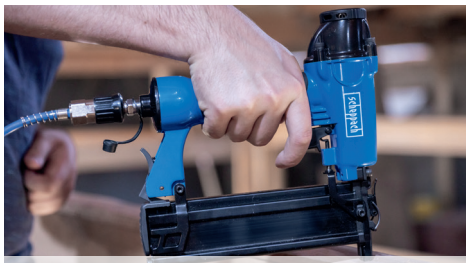

Nailing / tacking



Sports goods



Blowing out



Thanks to its compact size, the HC51V can be stored without using up much space.



Universal use for work around the house, workshop or garage.



Using the two quick coupling connections, several compressed air devices can be attached.

04/2026 Technical modifications and errors reserved.

OPTIONAL ACCESSORIES

- Air pistol
- Tyre inflater
- Compressed air hose
- Various adapter
- Various nozzles

scheppach Germany

80 L COMPRESSOR

HC85V



Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	426 x 516 x 983 mm
Mains voltage	230 V~ / 50 Hz
Power	1600 W
Max. working pressure	14 bar
Suction capability	330 L/min
Boiler size	80 L
Number of cylinders	1 pcs.
Quick coupling	2 pcs.
Design	oil-free
Sound power level (LwA)	97dB(A)

LOGISTICAL DATA

Weight net / gross	44 / 47 kg
Packaging dimensions	445 x 550 x 1044 mm
Item number	5906151901
EAN	4046664154235
20 containers	100 pcs.
40 containers	210 pcs.
40 HQ containers	250 pcs.

14 bar | 330 L/min | 80 L | Oil-free | 1600 W

UNIVERSAL USE



Nailing / tacking



Compressed air impact wrench



Tyre inflation



Compressed air ratchet




Compressed air eccentric sander



Sandblasting gun



Universal use for work around the house, workshop or garage.

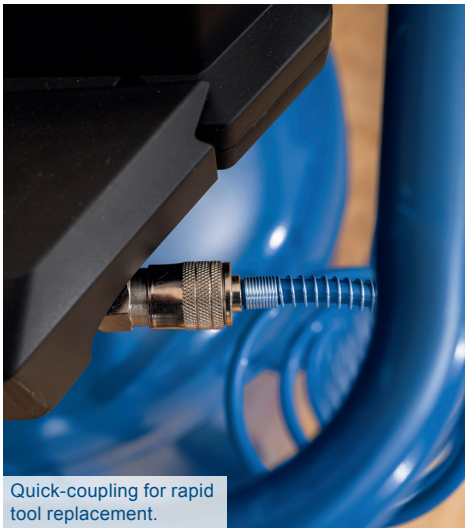

Quick-coupling for rapid tool replacement.



Pressure regulator and pressure gauge ensure ideal control of the operating pressure.

04/2026 Technical modifications and errors reserved.

scheppach Germany

6 L SILENT COMPRESSOR

HC06Si



PRODUCT DATA

Dimensions L x W x H	350 x 335 x 300 mm
Mains voltage	230 V~ / 50 Hz
Power	1100 W
Max. working pressure	10 bar
Suction capability	230 L/min
Boiler size	6 L
Number of cylinders	2 pcs.
Quick coupling	1 pcs.
Design	Oil-free
Sound power level (LwA)	66dB(A)

LOGISTICAL DATA

Weight net / gross	13.8 / 15.1 kg
Packaging dimensions	380 x 380 x 365 mm
Item number	5906192901
EAN	4046664302384
20 containers	540 pcs.
40 containers	1116 pcs.
40 HQ containers	1302 pcs.

10 bar | 230 L/min | 6 L | 66dB(A) | Oil-free | 1100 W

UNIVERSAL USE



Tyre inflation



Blowing out



Nailing / tacking



Sports goods



Air mattress




Universal use for work around the house, workshop or garage.



Thanks to its compact size, the HC06 can be stored without using up much space.



The carry handle allows for easy transport and mobile use.

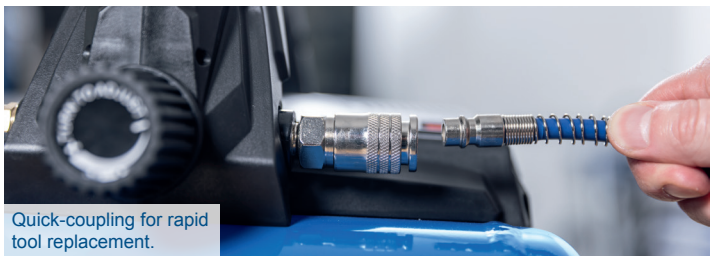

Quick-coupling for rapid tool replacement.



The tank pressure can be seen on the pressure gauge at all times.

04/2026 Technical modifications and errors reserved.

scheppach Germany

6 L SILENT COMPRESSOR

HC08Si

Hier klicken für optionales Zubehör



PRODUCT DATA

Dimensions L x W x H	420 x 185 x 490 mm
Mains voltage	230 V~ / 50 Hz
Power	1100 W
Max. working pressure	8 bar
Suction capability	162 L/min
Boiler size	6 L
Number of cylinders	1 pcs.
Quick coupling	1 pcs.
Design	Oil-free
Sound power level (LwA)	67.4dB(A)

LOGISTICAL DATA

Weight net / gross	11.7 / 12.7 kg
Packaging dimensions	450 x 200 x 515 mm
Item number	5906166901
EAN	4046664233121
20 containers	598 pcs.
40 containers	1225 pcs.
40 HQ containers	1400 pcs.

8 bar | 162 L/min | 6 L | 67.4dB(A) | Oil-free | 1100 W

UNIVERSAL USE



Tyre inflation



Blowing out



Nailing / tacking




Sports goods




Air mattress



The carry handle allows for easy transport and mobile use.

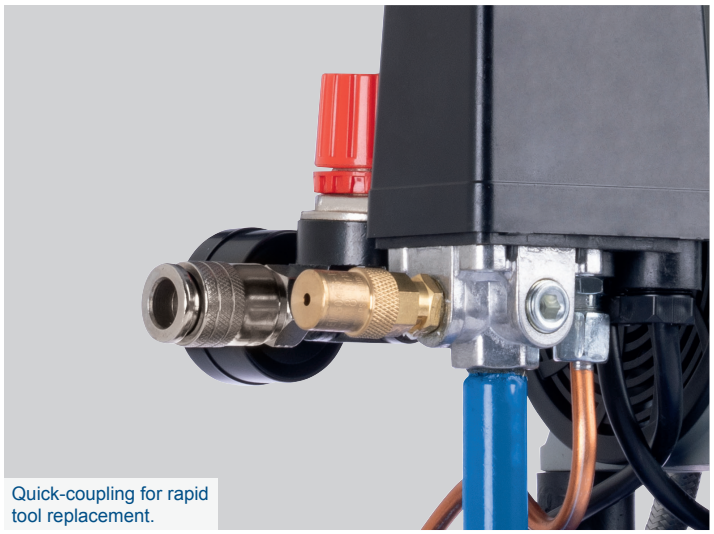

Quick-coupling for rapid tool replacement.

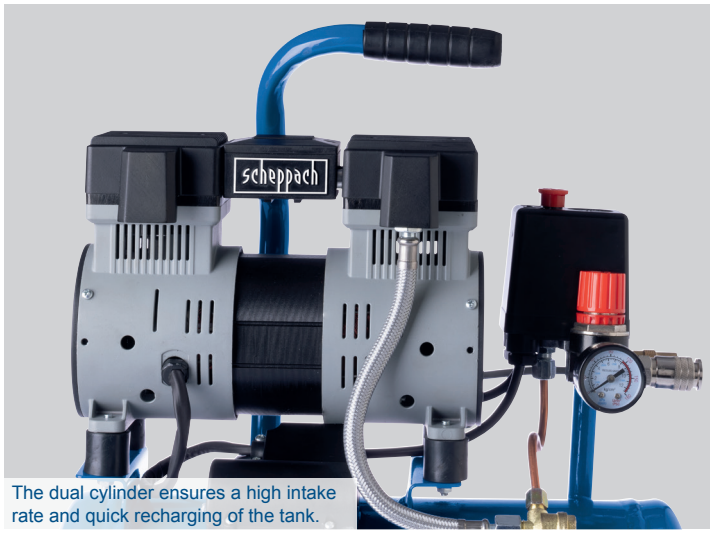

The dual cylinder ensures a high intake rate and quick recharging of the tank.

04/2026 Technical modifications and errors reserved.

scheppach Germany

24 L SILENT COMPRESSOR

HC26Si

Click here for optional accessories



PRODUCT DATA

Dimensions L x W x H	560 x 330 x 535 mm
Mains voltage	230 V~ / 50 Hz
Power	1100 W
Max. working pressure	8 bar
Suction capability	230 L/min
Boiler size	24 L
Number of cylinders	1 pcs.
Quick coupling	1 pcs.
Design	Oil-free
Sound power level (LwA)	66dB(A)

LOGISTICAL DATA

Weight net / gross	18.2 / 19.7 kg
Packaging dimensions	570 x 260 x 575 mm
Item number	5906165901
EAN	4046664233114
20 containers	276 pcs.
40 containers	568 pcs.
40 HQ containers	656 pcs.

8 bar | 230 L/min | 24 L | 66dB(A) | Oil-free | 1100 W

UNIVERSAL USE



Tyre inflation



Blowing out



Nailing / tacking



Sports goods



Air mattress



Thanks to its wheels and the ergonomic transport handle, the HC26Si is also ideal for mobile use.



Quick-connect coupling allows rapid tool replacement. The pressure gauge shows the tank pressure.

04/2026 Technical modifications and errors reserved.

24 L SILENT COMPRESSOR

HC25Si

Click here for optional accessories



PRODUCT DATA

Dimensions L x W x H	730 x 333 x 603 mm
Mains voltage	230 V~ / 50 Hz
Power	1100 W
Max. working pressure	8 bar
Suction capability	230 L/min
Boiler size	24 L
Number of cylinders	2 pcs.
Quick coupling	2 pcs.
Design	Oil-free
Sound power level (LwA)	60dB(A)

LOGISTICAL DATA

Weight net / gross	21 / 22.7 kg
Packaging dimensions	565 x 250 x 570 mm
Item number	5906140901
EAN	4046664114314
20 containers	320 pcs.
40 containers	656 pcs.
40 HQ containers	736 pcs.

8 bar | 230 L/min | 24 L | 60dB(A) | Oil-free | 1100 W

UNIVERSAL USE



Nailing / tacking



Tyre inflation



Sandblasting gun



Compressed air ratchet



Compressed air eccentric sander



Universal use for work around the house, workshop or garage.



Pressure regulator and pressure gauge ensure ideal control of the operating pressure.



The compressor is easy to manoeuvre thanks to the ergonomic transport bracket.

04/2026 Technical modifications and errors reserved.

scheppach Germany

50 L SILENT COMPRESSOR

HC51Si

Click here for optional accessories



PRODUCT DATA

Dimensions L x W x H	880 x 390 x 675 mm
Mains voltage	230 V~ / 50 Hz
Power	1500 W
Max. working pressure	8 bar
Suction capability	300 L/min
Boiler size	50 L
Number of cylinders	2 pcs.
Quick coupling	2 pcs.
Design	Oil-free
Sound power level (LwA)	60dB(A)

LOGISTICAL DATA

Weight net / gross	29.2 / 30 kg
Packaging dimensions	740 x 330 x 650 mm
Item number	5906141901
EAN	4046664123422
20 containers	165 pcs.
40 containers	378 pcs.
40 HQ containers	445 pcs.

8 bar | 300 L/min | 50 L | 60dB(A) | Oil-free | 1500 W

UNIVERSAL USE



Nailing / tacking



Tyre inflation



Compressed air eccentric sander



Compressed air ratchet



Sandblasting gun




Compressed air impact wrench


Thanks to its low noise emission during operation, the HC51Si is perfect for use in all types of workshop.



Quick-connect coupling allows rapid tool replacement.

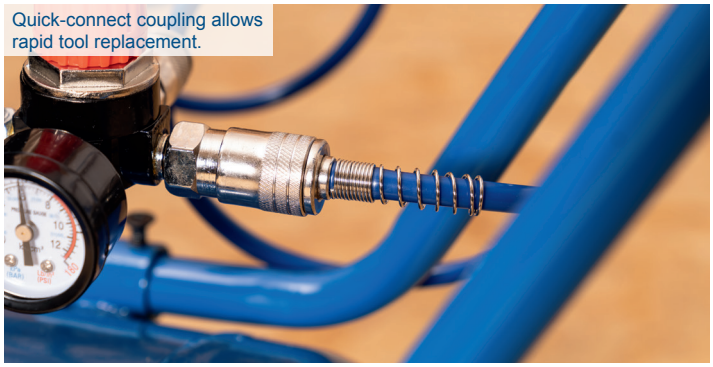

Pressure regulator and pressure gauge ensure ideal control of the operating pressure.

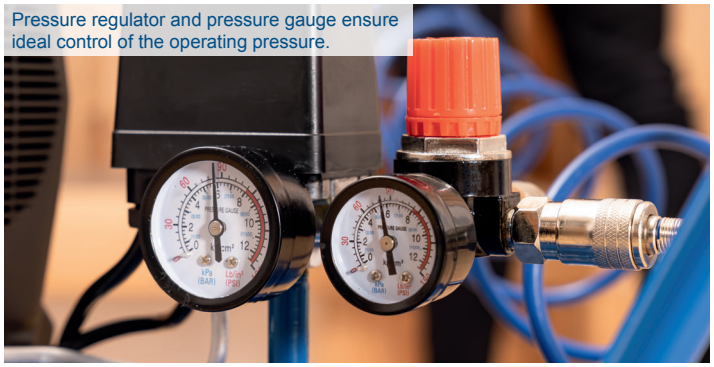

04/2026 Technical modifications and errors reserved.

COMPRESSED AIR UNIVERSAL TOOL

AERO$_2$SPADE



5in1

- Pointed chisel
- Flat chisel
- Wide chisel
- Scraper
- Spade



PLUS X AWARD

2018 ausgezeichnet für:

Innovation

High Quality

Bedienkomfort

Funktionalität

selbst ist der Mann
Das Do-it-yourself-Magazin

SELBST AUSPROBIERT

FAZIT: TTTTT

Bewertet mit „SEHR GUT“
Ausgabe 10/2018

www.selbst.de

Scheppach Aero2spade

Oberklasse

Heimwerker Praxis 4/2018

1,4

Preis/Leistung: gut – sehr gut

Scheppach Aero2spade

Alles für den Garten

BestOF HEIMWERKER PRAXIS 2019

1,4

Preis/Leistung: gut – sehr gut

COMPRESSOR RECOMMENDATIONS

24 L Compressors	Smaller excavation work
50 L Compressors	Medium excavation work, Removing root pieces
100 L Compressors	Larger excavation work, Demolition work

PRODUCT DATA

Dimensions L x W x H	820 x 360 x 75 mm
Tool receiver	18 mm
Impact force	27 Joule
Number of impacts	2100 bpm
Max. working pressure	6.3 bar
Max. air requirement	280 L/min

LOGISTICAL DATA

Weight net / gross	9.6 / 11 kg
Packaging dimensions	835 x 375 x 70 mm
Item number	5909601900
EAN	4046664064299
20 containers	900 pcs.
40 containers	1800 pcs.
40 HQ containers	1800 pcs.

27 J

2100 bpm

6.3 bar

280 L/min

18 mm

UNIVERSAL USE



Chisel



Scraper



Spade



Universal use in the garden and around the house.



Chisel for demolition work and for removing plaster, tiles, mortar and grout.



Higher throughput than with a conventional spade.

04/2026 Technical modifications and errors reserved.

INCLUDING

- **Pointed chisel**
- **Flat chisel**
- **Wide chisel**
- **Scraper**
- **Spade**

scheppach Germany

2500 KG PALLET TRUCK

HW2500




PRODUCT DATA


Dimensions L x W x H	1550 x 550 x 1200 mm
Load-bearing capacity	2500 kg
Lifting height	105 mm
Fork length	1150 mm
Individual fork width	160 mm
Load roller Ø	80 mm
Steering wheels Ø	180 mm
Max. steering angle	205°
Pump system	Hydraulics

LOGISTICAL DATA

Weight net / gross	62 / 62.5 kg
Packaging dimensions	2200 x 560 x 740 mm
Item number	5912701900
EAN	4046664083085
20 containers	180 pcs.
40 containers	360 pcs.
40 HQ containers	360 pcs.

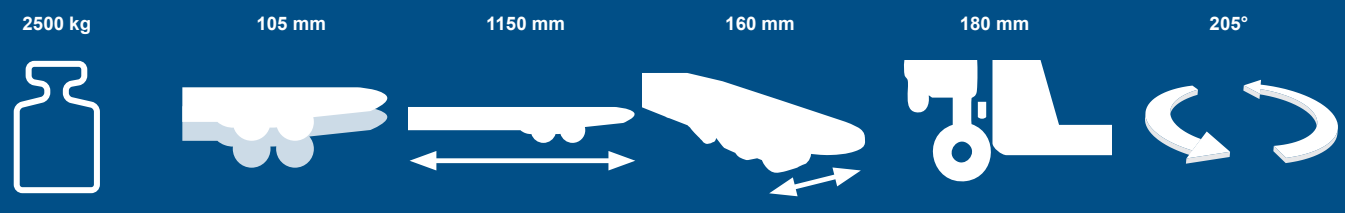

APPLICATION EXAMPLES

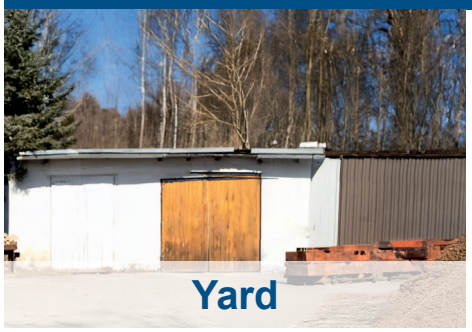





Easy operation of the pallet truck, thanks to three-way functional lever. The handle is ergonomic and ensures fatigue-free working.





Maximum lift height 105 mm.

Precise hydraulics, maintenance-free system.



205° turning angle to ensure easy manoeuvring of pallets.



04/2026 Technical modifications and errors reserved.

TOOL KIT, 50-PCS.

WZK49



PRODUCT DATA

Dimensions L x W x H	305 x 240 x 70 mm
Content	50-part.
Tools made of chrome-vanadium	Bit inserts, screwdriver
Can be locked	no
Case material	Plastic

LOGISTICAL DATA

Weight net / gross	2.05 / 2.15 kg
Packaging dimensions	310 x 250 x 80 mm
Item number	59093409968
EAN	4046664270157
20 containers	4320 pcs.
40 containers	8880 pcs.
40 HQ containers	9916 pcs.

50-part.


Chrome-vanadium steel

Cr-V


Transportable


Sturdy plastic case

AREAS OF APPLICATION


House


Construc-
tion site


Car


Yard


Camping


Practical handle for easy transport.


Durable thanks to high-quality materials.





50-part tool set

- 40x 1/4" bits 25 mm
- 1 x utility knife
- 1x Combination pliers
- 1x Needle nose pliers
- 1x 1/4" bit holder
- 1x hammer
- 1x tape measure
- 1x precision spirit level
- 2x screwdrivers, PH2x100, SL6x100

INCLUDING

- 50-part tool set
- Transport case

scheppach
Germany

04/2026 Technical modifications and errors reserved.

TOOL KIT, 97-PCS.

WZK120



PRODUCT DATA

Dimensions L x W x H	425 x 330 x 80 mm
Content	97-part.
Tools made of chrome-vanadium	Precision bit inserts, bit insert, screwdriver, hexagonal socket inserts, extension, reversible ratchet, spark plug socket, socket adapter
Can be locked	No
Case material	Plastic

LOGISTICAL DATA

Weight net / gross	5.3 / 5.4 kg
Packaging dimensions	524 x 320 x 80 mm
Item number	5909334900
EAN	4046664245094
20 containers	2488 pcs.
40 containers	5085 pcs.
40 HQ containers	5085 pcs.

97-part.


Chrome-vanadium steel

Cr-V


Transportable


Sturdy plastic case

AREAS OF APPLICATION


House


Construc-
tion site


Car


Yard


Camping

Practical handle for easy transport.



Durable thanks to high-quality materials.







97-part tool set

- 1x 1/4" screwdriver
- 1x precision hexagonal socket wrench
- 10x utility knife replacement blades
- 1x hand saw
- 3x hand saw replacement blades
- 1x precision spirit level, 225 mm
- 1x Side cutter
- 1x Combination pliers
- 1x Needle nose pliers
- 1x voltage tester
- 3x screwdrivers (PH1x100, PH2x100, SL6x100)
- 1x transport case
- 9x 3/8" hexagonal socket inserts 10 - 19 mm
- 1x 3/8" reversible ratchet
- 1x 3/8" extension 3"
- 1x 3/8" spark plug socket, 21 mm
- 1x Socket adapter 3/8" to 1/4"
- 8x 1/4" hexagonal socket inserts 5 - 12 mm
- 20x 1/4" bit inserts
- 2x 1/4" socket adapter
- 10x precision bit inserts
- 1x hammer, 300 g
- 1x Tape measure, 5 m
- 8x Allen keys (1.5, 2, 2.5, 3, 4, 5, 5.5, 6 mm)
- 1 x utility knife
- 7x open-ended spanner 6 - 19 mm
- 1x water pump pliers

04/2026 Technical modifications and errors reserved.

INCLUDING

- 217-part tool set
- Transport case

scheppach
Germany

TOOL KIT, 169-PCS.

WZK169



PRODUCT DATA

Dimensions L x W x H	470 x 370 x 78 mm
Content	169-part.
Tools made of chrome-vanadium	Precision bit inserts, bit insert, Screwdriver, hexagonal socket inserts, extension, reversible ratchet, spark plug socket, socket adapter
Can be locked	No
Case material	Plastic

LOGISTICAL DATA

Weight net / gross	5.4 / 5.6 kg
Packaging dimensions	480 x 385 x 90 mm
Item number	59093399978
EAN	4046664255826
20 containers	1710 pcs.
40 containers	3600 pcs.
40 HQ containers	3888 pcs.

97-part.

Chrome-vanadium steel

Cr-V

Transportable

Sturdy plastic case



Practical handle for easy transport.



Durable thanks to high-quality materials.






169-part tool set

- 1x 1/4" ratchet screwdriver
- 1x water pump pliers
- 1x Combination pliers
- 1x Needle nose pliers
- 4x clamps (4x 75 mm)
- 1x metal hacksaw, 150 mm
- 3x replacement saw blades
- Metal hacksaw
- 5x precision screwdrivers (SL3.0, SL2.5, PH0, PH00, PH000)
- 2x screwdrivers (PH2x100, SL6x100)
- 2x screwdrivers (PH2x38, SL6x38)
- 1x transport case
- 1x insulating tape (3 m)
- 10x expansion wall/floor plugs (6x25)
- 20x steel nails (20 mm),
- 20x steel nails (25 mm)
- 10x round head screws (4x25)
- 5x countersunk head screws (3x20)
- 5x picture hooks
- 10x 3/8" hexagonal socket inserts 10 mm - 19 mm
- 1x 3/8" reversible ratchet
- 1x 3/8" extension 3"
- 1x 3/8" spark plug socket 16 mm
- 1x socket adapter 3/8" to 1/4"
- 12x 1/4" hexagonal socket inserts (4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm)
- 1x bit holder, magnetic
- 6x combination spanners (8, 10, 12, 13, 14, 15 mm)
- 9x Allen key set (1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm)
- 1x tape measure (3 m)
- 1x precision spirit level, 230 mm
- 1x hammer, 300 g
- 20x bits (25 mm)
- 1 x utility knife
- 1x Adjustable spanner
- 10x spare blades for utility knife

AREAS OF APPLICATION




House



Construc-tion site



Car



Yard



Camping

04/2026 Technical modifications and errors reserved.

INCLUDING

- 169-part tool set
- Transport case

scheppach Germany

TOOL KIT, 187-PCS.

WZT187



PRODUCT DATA

Dimensions L x W x H	425 x 330 x 80 mm
Content	187-part.
Tools made of chrome-vanadium	Hexagon socket inserts, 90° Torx key set, reversible ratchet, Allen key set, bit adapter, universal joint, bit holder, extension, spark plug sockets, combination spanner, bit inserts, short screwdriver, adjustable spanner
Can be locked	No
Case material	Aluminium

LOGISTICAL DATA

Weight net / gross	8.8 / 9.3 kg
Packaging dimensions	370 x 165 x 51 mm
Item number	59093299968
EAN	4046664241928
40 HQ containers	2030 pcs.

187-part.


Chrome-vanadium steel

Cr-V


Transportable


Sturdy Aluminium case

AREAS OF APPLICATION


House


Construc-
tion site


Car


Yard


Camping


Trolley function and carrying handle for easy transport.


Aluminium transport case with transport wheels and reinforced corners.







187-part tool set

- 13x 1/4" hexagonal socket inserts 4 - 14 mm
- 1x 1/4" universal joint
- 1x 3/8" universal joint
- 1x 6" flexible extension
- 1x 1/4" bit adapter
- 12x 3/8" hexagonal socket inserts 6 - 17 mm
- 1x bit adapter 3/8" to 1/4"
- 1x 3/8" reversible ratchet
- 1x 3" extension
- 2x 3/8" spark plug sockets, 16 mm + 21 mm
- 8x combination spanners
  6, 8, 9, 10, 11, 12, 13, 15 mm
- 8x Allen keys
  1.5, 2, 2.5, 3, 4, 5, 5.5, 6 mm
- 7x 90° Torx keys
  T40, T30, T27, T25, T20, T15, T10
- 1x 1/4" screwdriver
- 20x bit inserts
- 1x Needle nose pliers
- 5x screwdriver
  SL4x75 mm, SL5x75 mm,
  SL6x100 mm, PH1x75 mm,
  PH2x100 mm
- 2x short screwdrivers
  SL6x38, PH2x38
- 4x precision screwdrivers
- 1x water pump pliers, 250 mm
- 1x water pump pliers, 150 mm
- 1x Side cutter
- 1x Adjustable spanner
- 1x hammer, 300 g
- 1x precision spirit level, 225 mm
- 1x Tape measure, 3 m
- 2x clamps
- 1x tyre pressure gauge
- 1 x utility knife
- 1x multi-purpose scissors
- 10x expansion wall/floor plugs 6x25 mm
- 33x steel nails 20 mm
- 20x steel nails 25 mm
- 10x round head screws 4x25 mm
- 5x countersunk head screws 3x20 mm
- 5x picture hooks
- 1x insulating tape, 3 m
- 1x crimping pliers

04/2026 Technical modifications and errors reserved.

INCLUDING

- 187-part tool set
- Transport case

scheppach
Germany

TOOL KIT, 217-PCS.

TB217



PRODUCT DATA

Dimensions L x W x H	446 x 342 x 96 mm
Content	217-part.
Tools made of chrome-vanadium	Hexagonal socket wrenches Universal joint, reversible ratchet Extension, screwdriver, Sliding T-bar, spark plug sockets, Deep socket wrenches, bit holder, Bit insert, combination spanner, E-profile socket wrenches, Allen key
Can be locked	no
Case material	Plastic

LOGISTICAL DATA

Weight net / gross	10 / 10.3 kg
Packaging dimensions	452.5 x 344 x 96 mm
Item number	5909307900
EAN	4046664120155
20 containers	1454 pcs.
40 containers	1818 pcs.
40 HQ containers	1818 pcs.

217-part.

Chrome-vanadium steel

Cr-V

Transportable


Sturdy plastic case

AREAS OF APPLICATION


House


Construc-
tion site


Car


Yard



Camping

Practical handle for easy transport.



Durable thanks to high-quality materials.



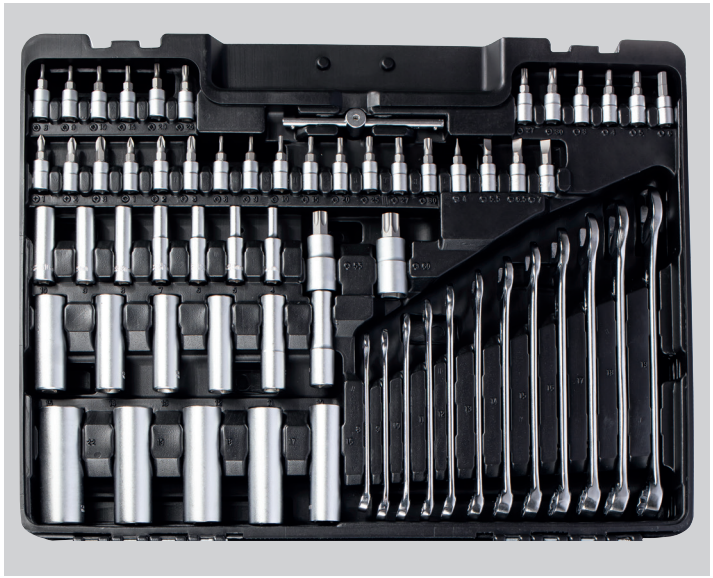



217-part tool set

- 14x 1/4" hexagonal socket wrenches 3.5 mm – 14 mm
- 5x 1/4" hexagonal socket wrenches E4 – E8
- 1x 1/4" universal joint
- 1x 1/4" reversible ratchet
- 2x 1/4" extensions 2" and 4"
- 1x 1/4" screwdriver
- 1x 1/4" sliding T-bar
- 7x 1/4" deep socket wrenches, 4 mm – 10 mm
- 30x 1/4" bit inserts
- 1x 1/4" bit holder
- 10x 3/8" hexagonal socket wrenches 10 mm – 19 mm
- 6x 3/8" E-profile socket wrenches E10 – E18
- 1x 3/8" universal joint
- 1x 3/8" reversible ratchet
- 1x 5" extension
- 6x 3/8" deep socket wrenches, 10 mm – 15 mm
- 1x 3/8" bit adapter
- 1x 3/8" spark plug socket 18 mm
- 15x 1/2" hexagonal socket wrenches 10 mm – 32 mm
- 3x 1/2" E-profile socket wrenches E20 – E24
- 1x 1/2" universal joint
- 1x 1/2" reversible ratchet
- 2x 1/2" extensions 5" and 10"
- 5x 1/2" deep socket wrenches, 16 mm – 22 mm
- 2x 1/2" bit inserts
- 1x 1/2" bit adapter
- 2x 1/2" spark plug sockets, 16 mm + 21 mm
- 7x Allen keys
- 74x bits
- 12x combination spanners 8 mm – 19 mm
- 1x screwdriver handle with magnetic bit holder
- 1x transport case

04/2026 Technical modifications and errors reserved.

INCLUDING

- 217-part tool set
- Transport case

scheppach
Germany

TOOL KIT, 141-PCS.

TB200



PRODUCT DATA

Dimensions L x W x H	450 x 150 x 375 mm
Content	141-part.
Tools made of chrome-vanadium	Bit inserts, screwdriver, insulated screwdriver, short screwdriver, precision screwdriver
Can be locked	Yes
Case material	Aluminium

LOGISTICAL DATA

Weight net / gross	9.5 / 9.6 kg
Packaging dimensions	480 x 180 x 370 mm
Item number	5909330900
EAN	4046664241935
20 containers	1170 pcs.
40 containers	2340 pcs.
40 HQ containers	2560 pcs.

141-part.


Chrome-vanadium steel

Cr-V

Transportable

Can be locked

Sturdy aluminium case

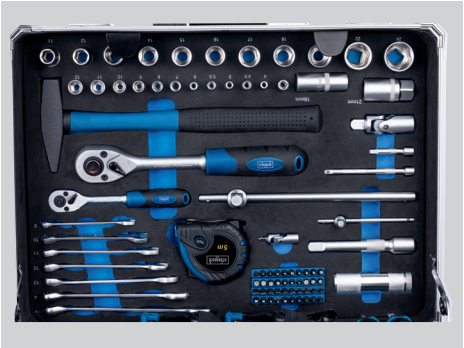










Robust aluminium case with reinforced corners and practical handle.

141-part tool set

- 11x 1/2" hexagonal socket wrenches, 11 mm - 24 mm
- 11x 1/4" hexagonal socket wrenches, 4 mm - 12 mm
- 2x 1/2" spark plug sockets, 16 mm + 21 mm
- 1x hammer, 300 g
- 1x 1/2" universal joint
- 1x 1/2" reversible ratchet
- 1x 1/4" reversible ratchet
- 2x 1/4" extensions 2" and 4"
- 1x 1/2" sliding T-bar
- 1x 1/4" sliding T-bar
- 1x tape measure (5 m)
- 1x 1/4" universal joint
- 1x 1/2" extension 5"
- 40x bit inserts 1/4"
- 1x LED torch (without batteries)
- 1x 1/4" bit adapter
- 7x combination spanners, 8 mm – 17 mm
- 1x telescopic magnets pick-up tool (600 mm)
- 1x voltage tester
- 4x precision screwdrivers, PH00, PH0, SL2.5, SL3.0
- 2x insulated screwdrivers PH1x80, SL3x75
- 2x short screwdrivers SL6x38, PH2x38
- 4x screwdrivers PH1x75, PH2x100, SL3x75, SL6x100
- 1x 1/4" screwdriver
- 4x lamps, 2 x 75 mm, 2 x 120 mm
- 3x replacement saw blades, metal hacksaw
- 1x Adjustable spanner 8" 200 mm
- 9x Allen keys (1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm)
- 1x folding rule (1 m)
- 1x steel rule (300 mm)
- 1x file (200 mm)
- 1x precision spirit level, 250 mm
- 10x spare blades for utility knife
- 1x transport case
- 1x Side cutter
- 1x Combination pliers
- 1x water pump pliers
- 1 x utility knife
- 1x metal hacksaw
- 5x carpenter's pencil

AREAS OF APPLICATION


House


Construc-tion site


Car


Yard


Camping

INCLUDING

- 141-part tool set
- Transport case

scheppach Germany

04/2026 Technical modifications and errors reserved.

TOOL KIT, 235-PCS.

TB220



PRODUCT DATA

Dimensions L x W x H	467 x 350 x 148 mm
Content	235-part.
Tools made of chrome-vanadium	Screwdriver, socket wrench bits, bit adapter, hexagonal socket wrenches, extension, extension, spark plug socket, socket adapter, hexagonal socket wrenches
Can be locked	Yes
Case material	Aluminium

LOGISTICAL DATA

Weight net / gross	8.65 / 9 kg
Packaging dimensions	470 x 335 x 150 mm
Item number	5909350900
EAN	4046664280583
20 containers	902 pcs.
40 containers	1805 pcs.
40 HQ containers	2096 pcs.


235-part. | Chrome-vanadium steel | Transportable | Can be locked | Sturdy aluminium case

AREAS OF APPLICATION


House


Construc-
tion site


Car


Yard


Camping


Neatly organised and well arranged tools.



Compact and lightweight tool kit – at only 8 kg also suitable for mobile use.





235-part tool set

- 1x ¼ 1/4" screwdriver
- 9x socket wrench bits 1/4"
- 1x 1/4" bit adapter
- 8x hexagonal socket wrenches 1/4" (4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 mm)
- 2x extension 1/4" 3/8" – 75 mm / 150 mm
- 1x 3/8" reversible ratchet
- 1x 3/8" spark plug socket, 21 mm
- 1x Socket adapter 3/8" to 1/4"
- 9x hexagonal socket wrenches 3/8" (10 / 11 / 12 / 13 / 14 / 15/ 17 / 18 / 19 mm)
- 1 x utility knife
- 1x spare blades box
- 5x spare knife blades
- 1x phase tester 125 – 250 V
- 6x screwdriver PH1 x 100mm / PH2 x 125mm / PZ1 x 100 mm / PZ2 x 125 mm / 0.8 x 4.0 x 100 mm / 1.0 x 5.5 x 100 mm
- 2x precision screwdriver PH0 x 75 mm / 0.4 x 2.0 x 75 mm
- 1x precision spirit level, 225 mm
- 1x folding rule
- 1x hand saw, 150 mm
- 6x Hand saw spare blade 150 mm / 3x metal, 3x wood
- 8x open-ended spanner 6 – 22 mm
- 1x Bit holder
- 1x quick-clamp bit holder 50x bit set
- 1x water pump pliers, 250 mm
- 1x storage box
- 50x wall/floor plugs
- 50x screws
- 1x hammer
- 1x Tape measure, 5 m
- 1x side cutter, 160 mm
- 1x combination pliers, 180 mm
- 1x universal shears, 180 mm
- 9x Allen keys (1.5 / 2 / 2.5 / 3 / 4 / 5 / 6 / 8 / 10 mm)
- 1x Transport case and key

04/2026 Technical modifications and errors reserved.

INCLUDING

- 235-part tool set
- Transport case

scheppach
Germany

WORKSHOP TROLLEY

TW1300



PRODUCT DATA


Dimensions L x W x H	695 x 335 x 755 mm
Content	–
Can be locked	No
Payload	120 kg
Drawer load capacity	15 kg (drawer) 30 kg (tool compartment)
Number of drawers	4 pcs.
Drawer size	505 x 300 x 65 mm (drawer) 610 x 330 x 240 mm (tool compartment)

LOGISTICAL DATA

Weight net / gross	17.7 / 20.86 kg
Packaging dimensions	680 x 390 x 770 mm
Item number	5909319900
EAN	4046664218357
40 HQ containers	348 pcs.

Chrome-vanadium steel	130 kg (total) 15 kg (drawer) 30 kg (tool compartment)	4 pcs.	505 x 300 x 65 mm (drawer) 610 x 330 x 240 mm (tool compartment)
Cr-V			

AREAS OF APPLICATION

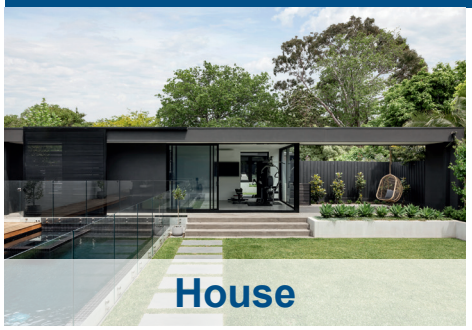

House



Construction site




Car



4 drawers that can be pulled out on ball bearing sliders with anti-slip mats for the neat storage of tools, with a maximum load of 15 kg per drawer.



Practical compartment provides space for storing tools and machines, with a maximum load of 30 kg

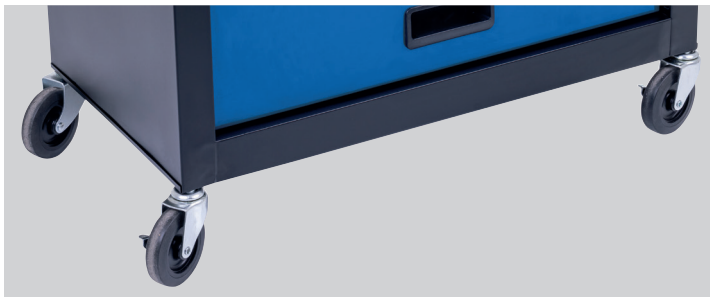

4 smooth-running rollers that rotate 360 degrees – 2 with brakes.



Sturdy handle ensures easy transport.

04/2026 Technical modifications and errors reserved.

WORKSHOP TROLLEY, 70-PCS.

TW1150



PRODUCT DATA

Dimensions L x W x H	760 x 460 x 965 mm
Content	70-part.
Cr-V	Open-end wrench, reversible ratchet, Hexagonal socket wrenches Universal joint, screwdriver, Extension, sliding T-bar, Screwdriver, short screwdriver, side cutters
Can be locked	Yes
Payload	200 kg
Drawer load capacity	15 kg
Number of drawers	6 pcs.
Drawer size	532 x 400 x 66 mm / 532 x 400 x 138.5 mm

LOGISTICAL DATA

Weight net / gross	40.0 / 42.5 kg
Packaging dimensions	785 x 475 x 830 mm
Item number	5909347900
EAN	4046664273080
20 containers	90 pcs.
40 containers	180 pcs.
40 HQ containers	207 pcs.

70-part.

Chrome-vanadium steel

Cr-V

Can be locked

200 kg (total)
15 kg (drawer)

6 pcs.


532 x 400 x 66 mm /
532 x 400 x 138.5 mm

AREAS OF APPLICATION


House


Construction site


Car

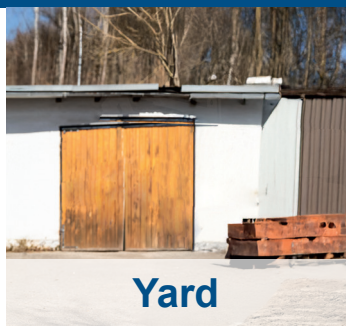
Yard


Drawers can be locked so tools are stored safely


The TW1150 is the ideal workshop trolley for any application thanks to the 70-part tool set.


Large, smooth-running wheels with parking brakes.


Standardised perforated walls on the sides to store further tools



70-part tool set

- 9x combination spanners 6 mm – 17 mm
- 1x 1/4" reversible ratchet
- 13x hexagonal socket wrenches, 4 mm – 14 mm
- 1x 1/4" universal joint
- 2x extension 50 mm, 100 mm
- 1x 1/4" sliding T-bar
- 1x 1/4" screwdriver
- 1x 3/8" reversible ratchet
- 17x hexagonal socket wrenches, 8 mm – 24 mm
- 1x 3/8" universal joint
- 2x extension 70 mm, 120 mm
- 1x 3/8" sliding T-bar
- 1x hammer, 300 g
- 1x soft-faced hammer
- 5x screwdrivers SL3*75 mm, SL4*100 mm, SL5*100 mm, SL6*150 mm, SL8*200 mm
- 1x short screwdriver SL6*38 mm
- 1x phase tester
- 6x Allen key T-grip H2*100 mm, H2.5*100 mm, H3*100 mm, H4*150 mm, H5*150 mm, H6*150 mm
- 1x Needle nose pliers
- 1x water pump pliers, 150 mm
- 1x water pump pliers, 250 mm
- 1x Combination pliers
- 1x Side cutter

INCLUDING

- 70-part tool set
- Transport trolley

scheppach Germany

04/2026 Technical modifications and errors reserved.

WORKSHOP TROLLEY, 71-PCS.

TW1100



PRODUCT DATA

Dimensions L x W x H	775 x 475 x 970 mm
Content	71-part.
Cr-V	Hexagonal socket wrenches Universal joint, reversible ratchet Combination spanner, sliding T-bar Slotted screwdriver, extension
Can be locked	Yes
Payload	450 kg
Drawer load capacity	15 / 20 kg
Number of drawers	7 pcs.
Drawer size	533 x 58 x 391 mm / 533 x 128 x 391 mm / 533 x 195 x 391 mm /

LOGISTICAL DATA

Weight net / gross	58.5 / 62 kg
Packaging dimensions	800 x 495 x 855 mm
Item number	5909304901
EAN	4046664094920
20 containers	66 pcs.
40 containers	138 pcs.
40 HQ containers	207 pcs.

71-part.

Chrome-vanadium steel

Cr-V

Can be locked

450 kg (total)
15 / 20 kg (drawer)

7 pcs.


533 x 58 x 391 mm /
533 x 128 x 391 mm /
533 x 195 x 391 mm /


AREAS OF APPLICATION


House


Construction site


Car

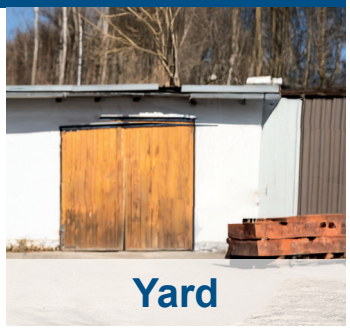
Yard

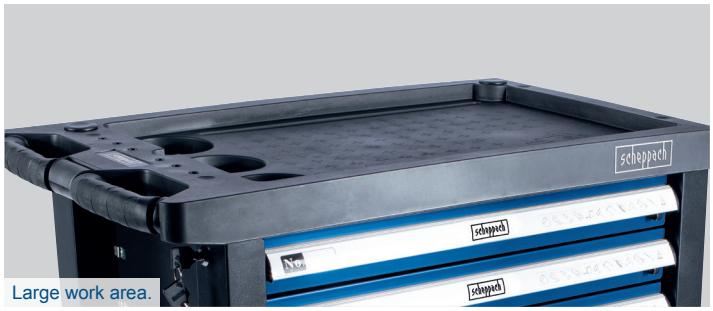
Large work area.


Optional perforations offering additional storage options.


Large, smooth-running wheels with parking brakes.


The TW1100 is the ideal workshop trolley for any application thanks to the 71-part tool set.



71-part tool set

- 1x hammer, 300 g
- 1x soft-faced hammer
- 9x combination spanners 6 mm – 17 mm
- 6x flat-tip screwdrivers: 1x voltage tester, 4x 100, 5x 100, 3x 75, 6x 150, 6x 38, 8x 200
- Set of 5 pliers: Wire cutter, universal pliers, needle-nosed pliers, water pump pliers, slip joint pliers
- 6x Allen key T-grip set 2.5 mm – 6 mm
- 13x hexagonal socket wrenches, 4 mm - 14 mm
- 1x 1/4" reversible ratchet
- 1x 1/4" universal joint
- 2x extension 2" + 4"
- 1x 1/4" sliding T-bar
- 1x 1/4" screwdriver
- 17x hexagonal socket wrenches, 10 mm - 32 mm
- 1x 1/2" reversible ratchet
- 1x 1/2" universal joint
- 2x extension 5" + 10"
- 1x 1/2" sliding T-bar

INCLUDING

- 71-part tool set
- Transport trolley

scheppach Germany

04/2026 Technical modifications and errors reserved.

WORKSHOP TROLLEY, 263-PCS.

TW1000



PRODUCT DATA

Dimensions L x W x H	770 x 460 x 970 mm
Content	263-part.
Cr-V	Hexagonal socket wrenches Universal joint, reversible ratchet Combination spanner, sliding T-bar Slotted screwdriver, extension
Can be locked	Yes
Payload	450 kg
Drawer load capacity	15 / 20 kg
Number of drawers	7 pcs.
Drawer size	533 x 58 x 391 mm / 533 x 128 x 391 mm / 533 x 195 x 391 mm /

LOGISTICAL DATA

Weight net / gross	66 / 68 kg
Packaging dimensions	780 x 500 x 870 mm
Item number	5909304900
EAN	4046664071402
20 containers	66 pcs.
40 containers	138 pcs.
40 HQ containers	207 pcs.

263-part.

Chrome-vanadium steel

Cr-V

Can be locked

450 kg (total)
15 / 20 kg (drawer)

7 pcs.


533 x 58 x 391 mm /
533 x 128 x 391 mm /
533 x 195 x 391 mm /

AREAS OF APPLICATION


House


Construction site


Car

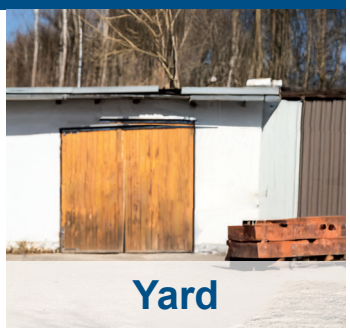
Yard

The TW1000 is the ideal workshop trolley for any application thanks to the 263-part tool set.



Optional perforations offering additional storage options.



Large work area.





263-part tool set

- 2x hammer, 300 g
- 1x soft-faced hammer
- 12x combination spanner 8 – 22 mm
- 6x flat-tip screwdrivers: 1x voltage tester, 4 x 100, 5 x 100, 3 x 75, 6 x 150, 6 x 38, 8 x 200
- 4x circlip pliers: 2x for inner rings 2x for outer rings
- Set of 3 pliers 1x needle nose pliers 1x side cutters 1x combination pliers
- 6x Allen key T-grip set 2 mm – 6 mm
- 6x Phillips screwdrivers PH1 x 100, PH2 x 150, PH3 x 200, PH2 x 100, PH0 x 75, PH2 x 38
- Crimp set 160 pcs.
- 13x hexagonal socket wrenches, 4 mm – 14 mm
- 1x 1/4" reversible ratchet
- 1x 1/4" universal joint
- 2x extension 2" + 4"
- 1x 1/4" sliding T-bar
- 1x 1/4" screwdriver
- 17x socket wrenches, 10 mm – 32 mm
- 1x 1/2" reversible ratchet
- 1x 1/2" universal joint
- 2x extension 5" + 10"
- 1x 1/2" sliding T-bar
- 6x Insulated screwdrivers SL3 x 75, PH2 x 100, PH1 x 100, SL4 x 100, SL5,5 x 125, PH0 x 75
- 7x precision screwdrivers PH0, PH00, PH1, 1,5 x 50, 2 x 50, 2,5 x 50, 3 x 50
- 8x Allen key set T9, T10, T15, T20, T25, T27, T30, T40

INCLUDING

- 263-part tool set
- Transport trolley

scheppach Germany

04/2026 Technical modifications and errors reserved.

MODULAR WORKSHOP SYSTEM

GWS08




PRODUCT DATA

Dimensions L x W x H	2360 x 500 x 2050 mm
Dimensions - cabinet	760 x 450 x 2080 mm
Dimensions - workshop trolley	616 x 330 x 785 mm
Dimensions - wall cabinet	1600 x 200 x 600 mm
Dimensions - workbench	1600 x 500 mm
Dimensions - hall wall unit	1600 x 600 mm

LOGISTICAL DATA

Weight net / gross	120 / 140 kg
Packaging dimensions	820 x 560 x 2220 mm
Item number	5909333901
EAN	4046664243533
40 containers	58 pcs.
40 HQ containers	58 pcs.

Cabinet 760 x 450 x 2080 mm
Workshop trolley 616 x 330 x 785 mm
Wall cabinet 1600 x 200 x 600 mm



Workbench 1600 x 500 mm
High wall 1600 x 600 mm




Can be locked



AREAS OF APPLICATION



Workshop

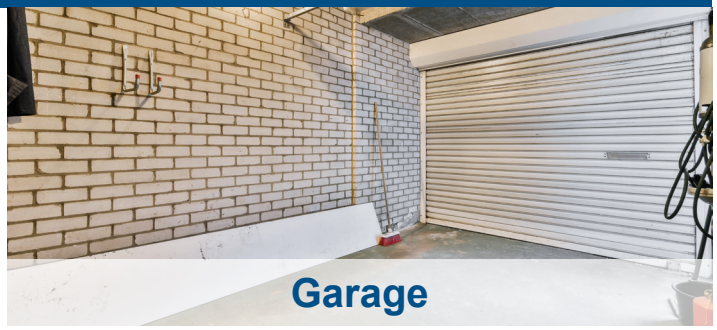

Garage

Workshop equipment comprising: 1x cabinet, 1x wall cabinet, 1x workbench, 2x workshop trolleys, 1x workshop wall panel, 12x hooks



Lockable cabinets for secure storage.



Tools can be neatly hung on the workshop wall panel using the 12 hooks supplied.



Modular system

1. Cupboard:
   - Height-adjustable shelves Load-bearing capacity, 30 kg each
   - Lockable hinged doors
   - Adjustable feet
2. Wall cabinet:
   - Powder-coated sheet steel
   - Doors lockable on both sides
   - Open centre section with 3 shelves – total load capacity 50 kg
3. Workshop wall panel:
   - Powder-coated sheet steel panel
   - Standardised, square holes: 10 x 10 mm, 38 mm hole spacing
4. 12x hooks:
   - 6x single hooks, 3x double hooks, 3x closed double hooks
   - For perforated wall panels with square holes: 10 x 10 mm, hole spacing 38 mm
5. Workbench:
   - Powder-coated steel construction
   - Adjustable feet
   - Robust wooden worktop
6. 2x workshop trolleys:
   - Powder-coated sheet steel panel
   - Each with 4 wheels - 2 of which with parking brakes
   - 1x with 4 lockable drawers
   - 1x with 1 drawer and 2 lockable doors
   - Load-bearing capacity 10 kg per drawer

Compact design – ideal even for rooms with limited space.



04/2026 Technical modifications and errors reserved.

MANUAL SWEEPER

S800



PRODUCT DATA

Dimensions L x W x H	593 x 650 x 1000 mm
Sweeping width	650 mm
Area covered	2600 m²/h
Container volume	20 L
Sweeping system	3-brush sweeping system
Drive	Manual


LOGISTICAL DATA

Weight net / gross	9 / 11.3 kg
Packaging dimensions	615 x 225 x 608 mm
Item number	5909806915
EAN	4046664207825
20 containers	296 pcs.
40 containers	616 pcs.
40 HQ containers	693 pcs.

650 mm



2600 m²/h



20 L



3-brush sweeping system





Easy and quick emptying of the sweeper's container.



Space-saving storage thanks to foldable guide bar.



Smooth-running soft-profile wheels and a castor that can be adjusted by 360° allow for easy manoeuvring.



Sweeping system with 3 brushes for effective cleaning, thorough and close to the edge.

SUITABLE FOR



Foliage



Sand



Grit



Lawn cut

04/2026 Technical modifications and errors reserved.

scheppach Germany

110 BAR ELECTRICAL HIGH-PRESSURE CLEANER

HPC 1400



PRODUCT DATA

Dimensions L x W x H	245 x 233 x 455 mm
Engine	230 V~
Power	1400 W
Maximum pressure	110 bar
Max. flow rate	390 L/h
Max. water temperature	50°C
Pump type	Aluminium
Cleaning agent tank	No
Hose length	3 m
Connection cable	5 m

LOGISTICAL DATA

Weight net / gross	5 / 5.7 kg
Packaging dimensions	290 x 240 x 395 mm
Item number	5907736901
EAN	4014915236986
20 containers	1024 pcs.
40 containers	2129 pcs.
40 HQ containers	2456 pcs.

3 m

Max. 390 L/h

Aluminium pump

LONG LIFE

Self-priming

Quick-Connect-System



Practical click system for all conventional garden hose systems.



Quick-Connect system allows rapid replacement of the attachments.



Effortless cleaning of stubborn dirt thanks to high working pressure.



Integrated bracket for high-pressure hose and cable.

UNIVERSAL APPLICATION



Bikes



Garden furniture



Façades



Windows



Car tyres



Outdoor equipment

04/2026 Technical modifications and errors reserved.

INCLUDING

- 3 m High-pressure hose
- Spray gun
- Spray lance
- Water inlet filter
- Variable nozzle

scheppach Germany

135 BAR ELECTRICAL HIGH-PRESSURE CLEANER

HPC 1600-KIT



PRODUCT DATA

Dimensions L x W x H	245 x 233 x 642 mm
Engine	230 V~
Power	1600 W
Maximum pressure	135 bar
Max. flow rate	420 L/h
Max. water temperature	50°C
Pump type	Aluminium
Cleaning agent tank	Yes
Hose length	5 m
Connection cable	5 m

LOGISTICAL DATA

Weight net / gross	7.2 / 8 kg
Packaging dimensions	375 x 275 x 395 mm
Item number	5907737901
EAN	4014915237013
20 containers	704 pcs.
40 containers	1472 pcs.
40 HQ containers	1666 pcs.

5 m

Max. 420 L/h

Aluminium pump

LONG LIFE

Self-priming

Quick-Connect-System



Effortless cleaning of stubborn dirt thanks to high working pressure.



Practical click system for all conventional garden hose systems.



Ideal for mobile use thanks to the large wheels and transport handle.



Quick-Connect system allows rapid replacement of the attachments.

UNIVERSAL APPLICATION



Bikes



Garden furniture



Tiles



Stone



Car tyres



Façades

04/2026 Technical modifications and errors reserved.

INCLUDING

- 5 m High-pressure hose
- Washing brush
- Patio cleaner
- Spray gun
- Spray lance
- Variable nozzle
- Turbo nozzle
- Spray bottle
- Water inlet filter

scheppach Germany

180 BAR ELECTRICAL HIGH-PRESSURE CLEANER

HCE2400

360°

Click here for optional accessories



PRODUCT DATA

Dimensions L x W x H	365 x 276 x 820 mm
Engine	230 – 240 V~
Power	2400 W
Maximum pressure	180 bar
Max. flow rate	480 L/h
Max. water temperature	50°C
Pump type	Aluminium
Cleaning agent tank	0.56 L
Hose length	5 m
Connection cable	5 m

LOGISTICAL DATA

Weight net / gross	11 / 12.5 kg
Packaging dimensions	440 x 345 x 505 mm
Item number	5907705906
EAN	4046664142331
20 containers	362 pcs.
40 containers	730 pcs.
40 HQ containers	850 pcs.

5 m

Max. 480 L/h

Aluminium pump

LONG LIFE

Self-priming

Quick-Connect-System



Practical handle and large wheels ensure easy transport.


Storage options for hose, cable and nozzles directly on the machine.


Quick-connect system for a rapid replacement of the attachments.

UNIVERSAL APPLICATION


Bikes


Garden furniture


Outdoor equipment


Windows


Car tyres


Tiles

04/2026 Technical modifications and errors reserved.

INCLUDING

- 5 m High-pressure hose
- Washing brush
- Patio cleaner
- Spray gun
- Spray lance
- Variable nozzle
- Turbo nozzle
- Kärcher adapter
- Cleaning agent tank

scheppach Germany

180 BAR ELECTRICAL HIGH-PRESSURE CLEANER

HCE2600

selbst – Das Do-it-yourself-Magazin
SELBST AUSPROBIERT
FAZIT: TTTTT
Bewertet mit „SEHR GUT“
Ausgabe 11/2023
www.selbst.de



Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	365 x 276 x 820 mm
Engine	230 – 240 V~
Power	2400 W
Maximum pressure	180 bar
Max. flow rate	480 L/h
Max. water temperature	50°C
Pump type	Aluminium
Cleaning agent tank	1150 ml
Hose length	5 m
Connection cable	5 m

LOGISTICAL DATA

Weight net / gross	12 / 13.5 kg
Packaging dimensions	485 x 345 x 505 mm
Item number	5907752901
EAN	4046664287315
20 containers	300 pcs.
40 containers	630 pcs.
40 HQ containers	785 pcs.

5 m

Max. 480 L/h

Aluminium pump

LONG LIFE

Self-priming

Quick-Connect-System



Practical bracket for nozzle attachments right on the device.



Suitable for all conventional hose systems.



Quick-connect system allows easy and rapid replacement of the attachments.



Practical handle ensures easy transport.

UNIVERSAL APPLICATION



Bikes



Garden furniture



Façades



Stone



Car tyres



Outdoor equipment

04/2026 Technical modifications and errors reserved.

INCLUDING

- 5 m High-pressure hose
- Spray gun
- Spray lance
- Variable nozzle
- Turbo nozzle
- Kärcher adapter
- Washing brush
- Patio cleaner
- Cleaning agent tank
- Nozzle cleaning needle

scheppach Germany

180 BAR ELECTRICAL HIGH-PRESSURE CLEANER

HCE2800



Click here for optional accessories

PRODUCT DATA

Dimensions L x W x H	365 x 276 x 820 mm
Engine	230 – 240 V~
Power	2400 W
Maximum pressure	180 bar
Max. flow rate	480 L/h
Max. water temperature	50°C
Pump type	Aluminium
Cleaning agent tank	1150 ml
Hose length	5 m
Connection cable	5 m

LOGISTICAL DATA

Weight net / gross	12 / 13.5 kg
Packaging dimensions	485 x 345 x 505 mm
Item number	5907743901
EAN	4046664254584
20 containers	300 pcs.
40 containers	630 pcs.
40 HQ containers	785 pcs.

5 m

Max. 480 L/h

Aluminium pump

LONG LIFE

Self-priming

Quick-Connect-System



Quick-connect system allows easy and rapid replacement of the attachments.



Suitable for all conventional hose systems.



Hose reel for convenient work and easy storage of the pressure hose.



Practical bracket for nozzle attachments right on the device.

UNIVERSAL APPLICATION



Bikes



Garden furniture



Façades



Stone



Car tyres



Outdoor equipment

04/2026 Technical modifications and errors reserved.

INCLUDING

- 5 m High-pressure hose
- Patio cleaner
- Spray gun
- Spray lance
- Variable nozzle
- Turbo nozzle
- Washing brush
- Rotating brush
- Nozzle cleaning needle
- Cleaning agent tank

scheppach Germany

150 BAR ELECTRICAL HIGH-PRESSURE CLEANER

SHD 150



Click here for optional accessories





PRODUCT DATA

Dimensions L x W x H	320 x 319 x 779 mm
Engine	230 – 240 V~
Power	1800 W
Maximum pressure	150 bar
Max. flow rate	420 L/h
Max. water temperature	50°C
Pump type	Aluminium
Cleaning agent tank	800 ml
Hose length	5 m
Connection cable	5 m


LOGISTICAL DATA

Weight net / gross	8 / 9.2 kg
Packaging dimensions	355 x 265 x 515 mm
Item number	5907754901
EAN	4046664289500
20 containers	570 pcs.
40 containers	1170 pcs.
40 HQ containers	1400 pcs.

5 m




Max. 420 L/h




Aluminium pump




Self-priming




Quick-Connect-System



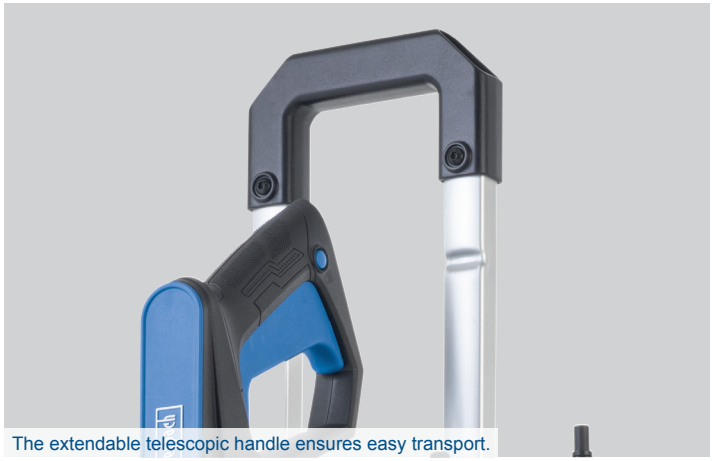

The extendable telescopic handle ensures easy transport.

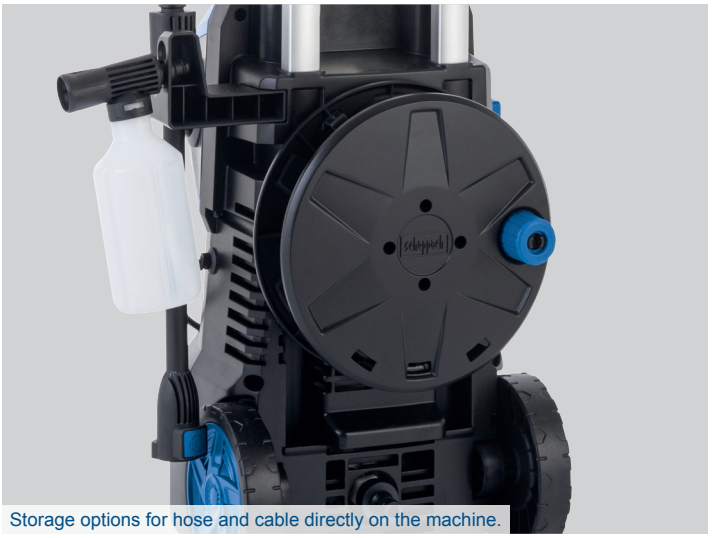

Storage options for hose and cable directly on the machine.

Variably adjustable high-pressure jet thanks to multifunctional high-pressure and cleaning agent nozzle.





Quick-connect system allows easy and rapid replacement of the attachments.

UNIVERSAL APPLICATION



Bikes



Garden furniture



Facades



Stone



Car tyres



Outdoor equipment

04/2026 Technical modifications and errors reserved.

INCLUDING

- 5 m High-pressure hose
- Spray gun
- Spray lance
- Variable nozzle
- Turbo nozzle
- Spray bottle
- Cleaning agent tank
- Nozzle cleaning needle

scheppach Germany

180 BAR ELECTRICAL HIGH-PRESSURE CLEANER

SHD 180



Click here for optional accessories





PRODUCT DATA

Dimensions L x W x H	360 x 345 x 580 mm
Engine	230 – 240 V~
Power	2400 W
Maximum pressure	180 bar
Max. flow rate	480 L/h
Max. water temperature	50°C
Pump type	Aluminium
Cleaning agent tank	800 ml
Hose length	8 m
Connection cable	5 m


LOGISTICAL DATA

Weight net / gross	11 / 12 kg
Packaging dimensions	355 x 310 x 655 mm
Item number	5907753901
EAN	4046664287308
20 containers	380 pcs.
40 containers	780 pcs.
40 HQ containers	960 pcs.

8 m



Max. 480 L/h




Aluminium pump



Self-priming



Quick-Connect-System





The extendable telescopic handle ensures easy transport.



Storage options for hose and cable directly on the machine.

Variably adjustable high-pressure jet thanks to multifunctional high-pressure and cleaning agent nozzle.





Large wheels enable mobile use.

UNIVERSAL APPLICATION



Bikes



Garden furniture



Façades



Stone



Car tyres



Outdoor equipment

04/2026 Technical modifications and errors reserved.

INCLUDING

- 5 m High-pressure hose
- Rotating brush
- Spray gun
- Spray lance
- Turbo nozzle


scheppach Germany

PETROL HIGH-PRESSURE CLEANER 212 CM³

HCP5000



Click here for optional accessories

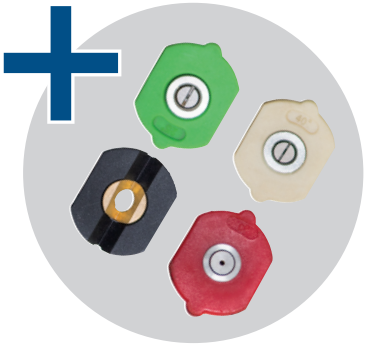

PRODUCT DATA

Dimensions L x W x H	670 x 490 x 1000 mm
Engine	4-stroke, air-cooled
Power	4.3 kW / 5.9 PS
Maximum pressure	241 bar
Max. flow rate	570 L/h
Max. water temperature	50°C
Pump type	Aluminium
Cleaning agent tank	Yes
Hose length	9.2 m

LOGISTICAL DATA

Weight net / gross	26 / 29.9 kg
Packaging dimensions	555 x 410 x 650 mm
Item number	5907742903
EAN	4046664242741
20 containers	132 pcs.
40 containers	264 pcs.
40 HQ containers	352 pcs.

9.2 m

Max. 570 L/h

c4-stroke petrol engine 212 cm³ and 5.9 hp

Quick-Connect-System



The HCP5000 is ideally suited for mobile use, thanks to the petrol-powered engine.



The high-pressure washer can be started effortlessly using the pull starter.



Space-saving storage thanks to foldable, transport handle.



Practical storage of accessories right on the machine.



The stainless steel spraying lance ensures a long service life.

UNIVERSAL APPLICATION



Bikes



Garden furniture



Façades



Windows



Car tyres



Outdoor equipment

04/2026 Technical modifications and errors reserved.

INCLUDING

- 4 nozzle attachments
  - 3x high-pressure nozzles: 0° / 25° / 40°
  - 1x low pressure or cleaning nozzle
- Cleaning lance
- Nozzle cleaning needle

scheppach Germany

16 LITRE ELECTRIC WET/DRY VACUUM CLEANER

VC16

3in1

- Wet vacuuming
- Dry vacuuming
- Blow-out function

Click here for optional accessories



PRODUCT DATA

Dimensions L x W x H	340 x 335 x 400 mm
Mains voltage	220 – 240 V~ / 50/60 Hz
Power	1200 W
Max. suction power	20 kPa
Container volume	16 L
Hose length	1.80 m
Cable length	3 m
Filter cleaning function	No
Folded filter	No
Power outlet	No

LOGISTICAL DATA

Weight net / gross	4 / 5 kg
Packaging dimensions	325 x 325 x 370 mm
Item number	5907744901
EAN	4046664256267
20 containers	700 pcs.
40 containers	1425 pcs.
40 HQ containers	1660 pcs.

16 L



4.8 m



3 m



1.8 m



Compact design







Foam filter for wet vacuuming


Practical cable spool


Quick-release fastener for easy bag replacement.


Practical accessory holder for tidy storage and working.



Handle for easy transport.


Quick-release fastener for fast and convenient emptying.

UNIVERSAL APPLICATION


Wet vacuuming


Dry vacuuming


Auto


Carpet


Blowing out


Textiles

04/2026 Technical modifications and errors reserved.

INCLUDING

- 1.8 m vacuum hose
- 3x 33 cm plastic extensions
- paper bag (FSC-certified)
- Foam filter
- Joint nozzle
- Floor nozzle

scheppach Germany

20 LITRE ELECTRIC WET/DRY VACUUM CLEANER

VC20

3in1

- Wet vacuuming
- Dry vacuuming
- Blow-out function



Click here for optional accessories



PRODUCT DATA

Dimensions L x W x H	310 x 310 x 410 mm
Mains voltage	220 – 240 V~ / 50/60 Hz
Power	1300 W
Max. suction power	20 kPa
Container volume	20 L
Hose length	2 m
Cable length	4 m
Filter cleaning function	No
Folded filter	No
Power outlet	No

LOGISTICAL DATA

Weight net / gross	4.4 / 5.1 kg
Packaging dimensions	330 x 330 x 430 mm
Item number	5907741901
EAN	4046664242000
20 containers	550 pcs.
40 containers	1130 pcs.
40 HQ containers	1293 pcs.

20 L

1300 W

4 m

2 m

Compact design

20 kPa



The flexible hose enables mobile and unrestricted working.



The quick-release fastener ensures fast and convenient emptying.



Integrated accessories and cable holder for neat stowage and tidy working.



The joint nozzle and large floor nozzle are particularly suitable for carpets and smooth floors.

UNIVERSAL APPLICATION



Wet vacuuming



Dry vacuuming



Blowing out



Wood shavings



Shavings



Dust

04/2026 Technical modifications and errors reserved.

INCLUDING

- Paper bag
- Foam filter
- Textile filter
- Joint nozzle
- Floor nozzle
- 3 x plastic extension tubes (330 mm per tube)

scheppach Germany

25 LITRE ELECTRIC WET/DRY VACUUM CLEANER

VC25

3in1

- Wet vacuuming
- Dry vacuuming
- Blow-out function

Click here for optional accessories





PRODUCT DATA

Dimensions L x W x H	395 x 395 x 545 mm
Mains voltage	220 – 240 V~ / 50/60 Hz
Power	1200 W
Max. suction power	20 kPa
Container volume	25 L
Hose length	2 m
Cable length	3 m
Filter cleaning function	No
Folded filter	No
Power outlet	No

LOGISTICAL DATA

Weight net / gross	4.8 / 6.2 kg
Packaging dimensions	330 x 330 x 515 mm
Item number	5907745901
EAN	4046664256298
20 containers	500 pcs.
40 containers	1020 pcs.
40 HQ containers	1190 pcs.

25 L



5 m



3 m



2 m



Compact design







Extensive reach.



Foam filter for wet vacuuming.



Quick-release fastener for easy bag replacement.



Practical accessory holder for tidy storage and working.



Quick-release fastener for fast and convenient emptying.




Practical cable spool

UNIVERSAL APPLICATION



Wet vacuuming

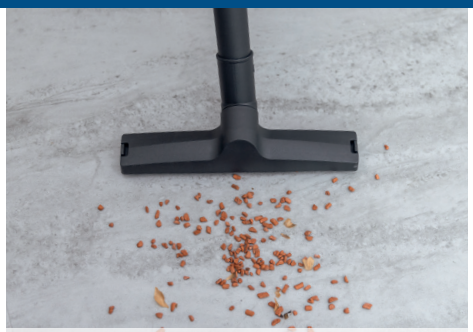

Dry vacuuming



Auto



Carpet



Blowing out



Textiles

04/2026 Technical modifications and errors reserved.

INCLUDING

- 2 m vacuum hose
- 3x 33 cm plastic extensions
- paper bag (FSC-certified)
- Foam filter
- Joint nozzle
- Floor nozzle

scheppach Germany

30 LITRE ELECTRIC WET/DRY VACUUM CLEANER

VC30V2

3in1

- Wet vacuuming
- Dry vacuuming
- Blow-out function



Click here for optional accessories



PRODUCT DATA

Dimensions L x W x H	335 x 335 x 640 mm
Mains voltage	220 – 240 V~ / 50/60 Hz
Power	1200 W
Max. suction power	20 kPa
Container volume	30 L
Hose length	2 m
Cable length	3 m
Filter cleaning function	No
Folded filter	No
Power outlet	No

LOGISTICAL DATA

Weight net / gross	5.2 / 6.6 kg
Packaging dimensions	335 x 335 x 610 mm
Item number	5907747901
EAN	4046664256311
20 containers	422 pcs.
40 containers	860 pcs.
40 HQ containers	1007 pcs.

30 L



5 m



3 m



2 m



Compact design



20 kPa



Easy to empty.



Foam filter for wet vacuuming.



Practical cable spool



Quick-release fastener for easy bag replacement.





Integrated accessories bracket

UNIVERSAL APPLICATION



Wet vacuuming



Dry vacuuming



Carpet



Joints



Auto



Blowing out

04/2026 Technical modifications and errors reserved.

INCLUDING

- 2 m vacuum hose
- 3x 33 cm plastic extensions
- paper bag (FSC-certified)
- Foam filter
- Joint nozzle
- Floor nozzle

scheppach Germany

30 LITRE ELECTRIC WET/DRY VACUUM CLEANER

VC30 PREMIUM

3in1

- Wet vacuuming
- Dry vacuuming
- Blow-out function

Click here for optional accessories





PRODUCT DATA

Dimensions L x W x H	330 x 350 x 650 mm
Mains voltage	230V~ / 50/60 Hz
Power	1500 W
Max. suction power	20 kPa
Container volume	30 L
Hose length	3 m
Cable length	6 m
Filter cleaning function	No
Folded filter	Yes
Power outlet	230V~ / max. 2000 W

LOGISTICAL DATA

Weight net / gross	7.6 / 9.4 kg
Packaging dimensions	335 x 335 x 610 mm
Item number	5907746901
EAN	4046664256304
20 containers	450 pcs.
40 containers	925 pcs.
40 HQ containers	1035 pcs.

30 L



9 m



6 m



3 m



max. 2000 W



20 kPa



Tool socket with 230 V~ / max. 2000 W.


1m vacuum hose for small devices.


Handle for easy transport.



Drain cover for easy emptying of liquids.


Practical accessory bag.


Quick-release fastener for easy bag replacement.

UNIVERSAL APPLICATION


Wet vacuuming

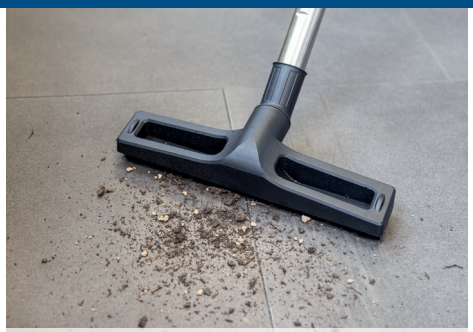
Dry vacuuming


Auto


Carpet


Blowing out


Joints

04/2026 Technical modifications and errors reserved.

INCLUDING

- 3 m vacuum hose
- 1 m vacuum hose for small devices
- Aluminium telescopic pipe
- paper bag (FSC-certified)
- Foam filter
- Joint nozzle
- Dry floor nozzle
- Wet floor nozzle
- Car nozzle
- Folded filter
- Upholstery nozzle
- Connection adapter
- Accessory bag

scheppach Germany

50 LITRE ELECTRIC WET/DRY VACUUM CLEANER

VC50

3in1

- Wet vacuuming
- Dry vacuuming
- Blow-out function

Click here for optional accessories



PRODUCT DATA

Dimensions L x W x H	530 x 402 x 940 mm
Mains voltage	220 – 240 V~ / 50/60 Hz
Power	1400 W
Max. suction power	20 kPa
Container volume	50 L
Hose length	3 m
Cable length	5 m
Filter cleaning function	Yes
Folded filter	Yes
Power outlet	230 V~ / max. 2000 W

LOGISTICAL DATA

Weight net / gross	10.3 / 12.7 kg
Packaging dimensions	555 x 420 x 675 mm
Item number	5907748901
EAN	4046664256335
20 containers	158 pcs.
40 containers	325 pcs.
40 HQ containers	385 pcs.

50 L



8 m



5 m



3 m



230 V~ / max. 2000 W



20 kPa



Power outlet, 230 V~ and a maximum output of 2,000 W for the connection of electric tools



Practical drainage hose allows convenient emptying of liquids.



Handle for easy transport.



Integrated accessories bracket



quick-release fastener for easy bag replacement.

UNIVERSAL APPLICATION



Wet vacuuming



Dry vacuuming



Auto



Carpet



Blowing out



Joints

04/2026 Technical modifications and errors reserved.

INCLUDING

- 3 m vacuum hose
- Aluminium telescopic pipe
- paper bag (FSC-certified)
- Foam filter
- Joint nozzle
- Floor nozzle
- Connection adapter
- Folded filter
- Drain hose

scheppach Germany

SPRAY EXTRACTION CLEANER

SPRAYVAC20

5in1

- Wet vacuuming
- Dry vacuuming
- Spray
- Filter cleaning
- Blow-out function





Click here for optional accessories



PRODUCT DATA

Dimensions L x W x H	385 x 335 x 480 mm
Mains voltage	220 – 240 V~
Power	1600 W
Max. suction power	20 kPa
Container volume	20 L
Hose length	2 m
Cable length	7.5 m
Filter cleaning function	No
Folded filter	Yes
Power outlet	No

LOGISTICAL DATA

Weight net / gross	6 / 9 kg
Packaging dimensions	430 x 380 x 480 mm
Item number	5905701901
EAN	4046664169277
20 containers	375 pcs.
40 containers	790 pcs.
40 HQ containers	940 pcs.

20 L



9.5 m



Filter surface

0,08 m²

7.5 m



2 m



20 kPa



Efficient cleaning through simultaneous spraying and suction.



Easy switching between spraying and vacuuming at the touch of a button.




Removable cleaning agent tank with a capacity of 3.5 litres.



20 litre waste water tank made of stainless steel.

UNIVERSAL APPLICATION

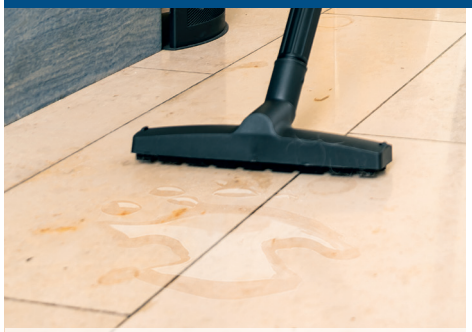

Wet vacuuming



Dry vacuuming



Carpet



Upholstery



Auto



Blowing out

04/2026 Technical modifications and errors reserved.

INCLUDING

- Washing nozzle for upholstery cleaning
- Washing nozzle with hard-surface attachment
- 20 cm joint nozzle
- Upholstery nozzle
- Wet/dry floor nozzle
- 2 plastic tubes with a length of 45 cm each
- Folded filter
- Paper vacuum bag
- Foam filter

scheppach Germany

20 LITRE ASH VACUUM CLEANER

AVC25

3in1

- Vacuuming ash
- Vacuuming
- Blowing out



PRODUCT DATA

Dimensions L x W x H	345 x 335 x 440 mm
Mains voltage	220 – 240 V~ / 50/60 Hz
Power	1300 W
Max. suction power	20 kPa
Container volume	20 L
Hose length	1500 mm
Connection cable	5 m
Filter cleaning function	Yes
Folded filter	Yes

LOGISTICAL DATA

Weight net / gross	4.4 / 5.1 kg
Packaging dimensions	305 x 305 x 410 mm
Item number	5906406901
EAN	4046664243328
20 containers	630 pcs.
40 containers	1280 pcs.
40 HQ containers	1515 pcs.

20 L



1300 W



5 m



1.5 m



Compact design







Quick-release fasteners allow easy emptying of the container.



The flexible, fireproof hose with a length of 150 cm ensures mobile working.



Filter cleaning function with contamination indicator



Practical accessory holders directly on the machine.

UNIVERSAL APPLICATION



Fireplace



Wood-burning oven



Barbecue

04/2026 Technical modifications and errors reserved.

INCLUDING

- Folded filter
- Round aluminium nozzle
- Flat aluminium nozzle
- Filter cage

scheppach Germany

SCHEPPACH
MADE FOR YOUR PROJECT

Scheppach GmbH
Günzburger Str. 69 | D-89335 Ichenhausen | Tel: 0049 8223 4002-99 | Fax: 0049 8223 4002-153
bestelleingang@scheppach.com | www.scheppach.com

Ausgabe 2026-04 | Technical modifications and errors reserved. Figures may differ from the original.